




- (51) International Patent Classification:  
*B65D 88/74* (2006.01) *B65D 90/04* (2006.01)  
*B65D 90/02* (2006.01)
- (21) International Application Number:  
PCT/US2012/069493
- (22) International Filing Date:  
13 December 2012 (13.12.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/577,855 20 December 2011 (20.12.2011) US
- (71) Applicant: **CARRIER CORPORATION** [US/US]; One Carrier Place, Farmington, CT 06034 (US).
- (72) Inventors; and
- (71) Applicants (for US only): **CRESSWELL, Kenneth** [US/US]; 5515 Mt. Pleasant Drive, Cazenovia, NY 13035 (US). **CHEN, Yu H.** [US/US]; 4745 Edgeworth Drive, Manlius, NY 13104 (US). **GRAAFF, Wolfgang** [DE/US]; 91 Central Street, Auburndale, MA 02466 (US).

- (74) Agent: **FOX, David A.**; CANTOR COLBURN LLP, 20 Church Street, 22nd Floor, Hartford, CT 06103 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

- (54) Title: VACUUM INSULATION FOR AN INTEGRATED REFRIGERATED CONTAINER

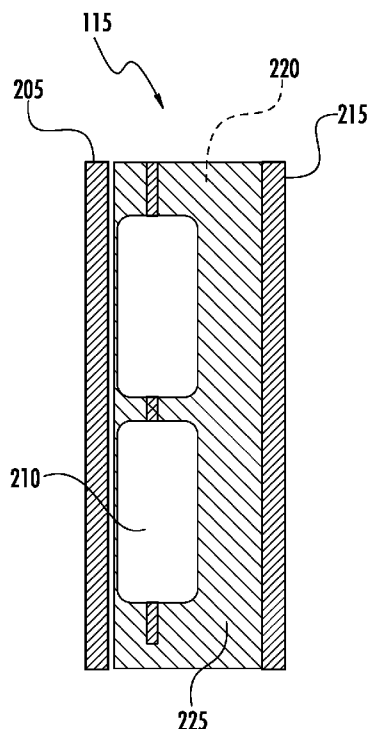

- (57) Abstract: An insulation system for a cargo container (105), includes at least one wall (115, 120, 125, 130) having an exterior panel (205) and an interior liner (215), the exterior panel and the interior liner being substantially parallel to each other; a cavity disposed between the exterior panel and the interior liner, the cavity being coextensive with a surface area of each of the exterior panel and the interior liner; at least one vacuum insulation bag (210) disposed within the cavity (220), the at least one vacuum insulation bag (210) being configured for insulating the interior liner from the exterior panel.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

— *of inventorship (Rule 4.17(iv))*

**Published:**

— *with international search report (Art. 21(3))*