



(51) International Patent Classification:
E21B 19/10 (2006.01)

(21) International Application Number:
PCT/US2009/035999

(22) International Filing Date:
4 March 2009 (04.03.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/033,939 5 March 2008 (05.03.2008) US

(71) Applicant (for all designated States except US):
CAMERON INTERNATIONAL CORPORATION
[US/US]; 1333 West Loop South, Suite 1700, Houston,
Texas 77027-9919 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NGUYEN, Dennis, P.**
[US/US]; 3305 Aspenbrook Court, Pearland, Texas
77581 (US).

(74) Agent: **ROSE, Collin, A.**; P.O. Box 3267, Houston,
Texas 77253-3267 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: SLIP HANGER ASSEMBLY AND ACTUATOR

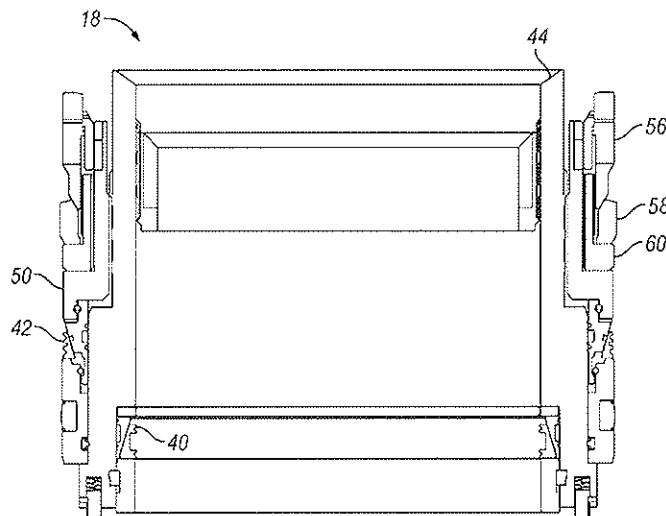


FIG. 4

(57) Abstract: A slip hanger assembly for installation of casing in a wellhead, the assembly including a slip ring capable of restraining the casing in the wellhead. The assembly including a seal assembly with an inner and outer seal. The assembly also includes a hanger assembly actuator including a load ring flange, a BOP adapter including a horizontal torque provider and the BOP adapter being connectable to the wellhead, and a seal assembly actuator. The hanger assembly actuator can set the inner and outer seals independently of each other.