



- (51) **International Patent Classification:**
H02G 3/08 (2006.01) *F16L 5/10* (2006.01)
- (21) **International Application Number:**
PCT/SE2013/051275
- (22) **International Filing Date:**
31 October 2013 (31.10.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** MCT BRATTBERG AB [SE/SE]; Lyck-
eåborg, S-371 92 Karlskrona (SE).
- (72) **Inventors:** JOHANSSON, Bengt; Mölletorpsvägen 49, S-
371 92 Karlskrona (SE). BIRGERUD, Bo; Kungsmansvä-
gen 18F, S-236 31 Höllviken (SE).
- (74) **Agent:** AWAPATENT AB; Box 45086, S-104 30 Stock-
holm (SE).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** INSERT BLOCK HALF

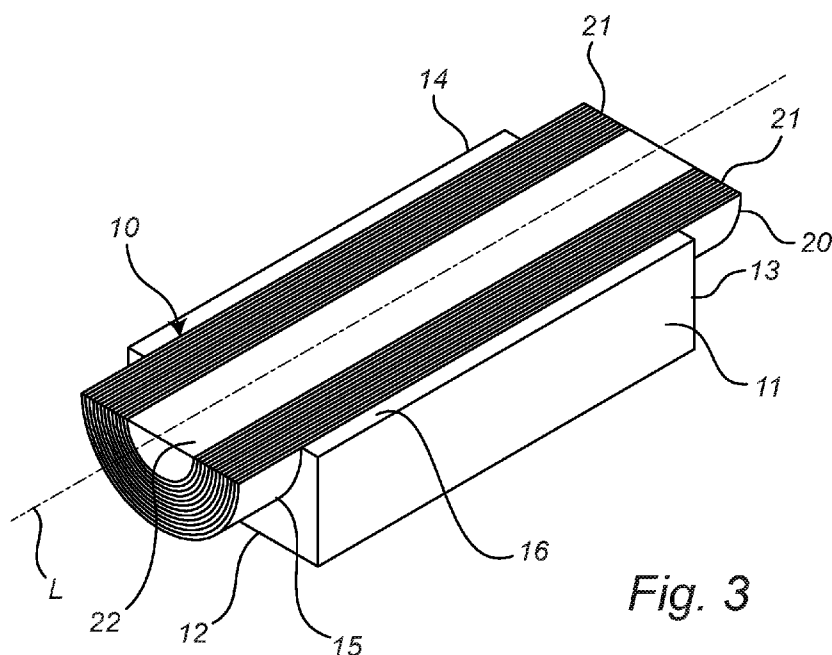


Fig. 3

(57) **Abstract:** The present invention relates to an insert block half (10) for sealing around a cable, pipe or wire. The insert block half comprises: a body (11) with a first (12) and a second end (13), a first side (14) intended to be arranged towards an substantially identical insert block half, and a semi-circular groove (15) arranged in said first side (14) and extending between the first and second end; and a number of peelable layers (20; 30; 40; 50) arranged in the groove, each layer having a shape corresponding to the semi-cylindrical groove to fit within the groove and an length exceeding the length between the first and second end of the body.