

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number  
WO 01/26742 A1

(51) International Patent Classification<sup>7</sup>: A62C 37/11

(21) International Application Number: PCT/FI00/00867

(22) International Filing Date: 6 October 2000 (06.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
19992172 8 October 1999 (08.10.1999) FI

(71) Applicant and

(72) Inventor: SUNDHOLM, Göran [FI/FI]; Ilmari Kiannon  
kuja 3, FIN-04310 Tuusula (FI).

(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O.  
Box 148, FIN-00121 Helsinki (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AT  
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility

model), DK, DK (utility model), DM, DZ, EE, EE (utility  
model), ES, FI, FI (utility model), GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility  
model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD,  
SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT,  
TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— With international search report.

— Before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments.

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: INSTALLATION FOR FIGHTING FIRE, SPRAY HEAD

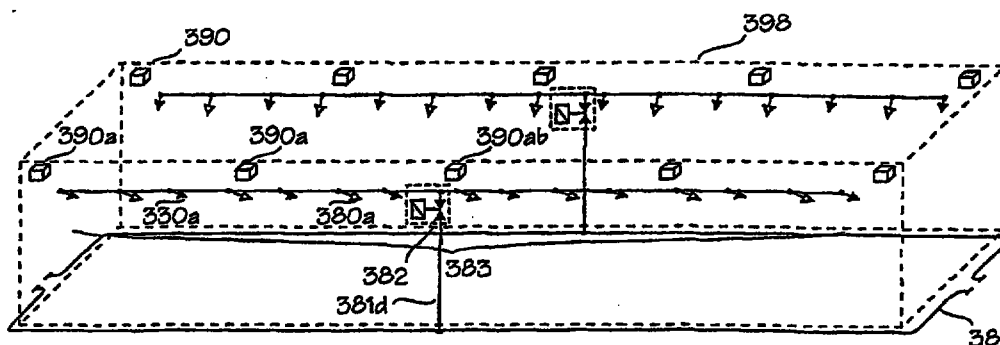

(57) Abstract: The invention relates to an installation for fighting fire, the installation comprising a number of spray heads (330a, 380a), a pipe system (381) for leading extinguishing medium to the spray heads, the spray heads comprising a holder body having an inlet for incoming extinguishing medium, at least one nozzle and a cover locked in a protective position in front of said nozzle when the installation is in an inactive mode and, arranged to be displaceable upon activation of the installation to a released position by release of the locking, in which released position the cover is clear of said nozzle so that the nozzle may spray extinguishing medium when the spray head is in an active mode. In order to be able to use the installation in conditions in which it can be strongly exposed to dirt and impurities and in order that it will not be activated on account of the spray heads of the installation being exposed to impacts or heat not coming from the seat of the fire, the installation is characterized in that the spray heads (330a, 380a) comprise a displaceable device which is arranged to be displaced by the effect of pressure of a fluid in relation to the holder body and thus exert a force on a locking so that it releases the cover.

WO 01/26742 A1