



(51) International Patent Classification:

A61B 5/00 (2006.01) *A61B 5/05* (2006.01)
A61B 1/273 (2006.01) *H04B 7/24* (2006.01)

(21) International Application Number:

PCT/US2012/046118

(22) International Filing Date:

10 July 2012 (10.07.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/180,516 11 July 2011 (11.07.2011) US

(71) Applicant (for all designated States except US): **PROTEUS BIOMEDICAL, INC.** [US/US]; 2600 Bridge Parkway, Ste. #101, Redwood City, California 94065 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BERKMAN, Jeffrey** [US/US]; 20501 El Dorado Court, Saratoga, California 95070 (US). **ZDEBLICK, Mark J.** [US/US]; 300 La Mesa Drive, Portola Valley, California 94028 (US).

JOHNSON, Patricia [US/US]; 3354 Ramona Street, Palo Alto, California 94306 (US). **HAFEZI, Hooman** [US/US]; 64 Eddystone Court, Redwood City, California 94065 (US). **WITHRINGTON, Jonathan** [GB/US]; 21 Rosemont Place, San Francisco, California 94103 (US).

(74) Agent: **FIELD, Bret E.**; Bozicevic, Field & Francis LLP, 1900 University Avenue, #200, East Palo Alto, California 94303 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: COMMUNICATION SYSTEM WITH REMOTE ACTIVATION

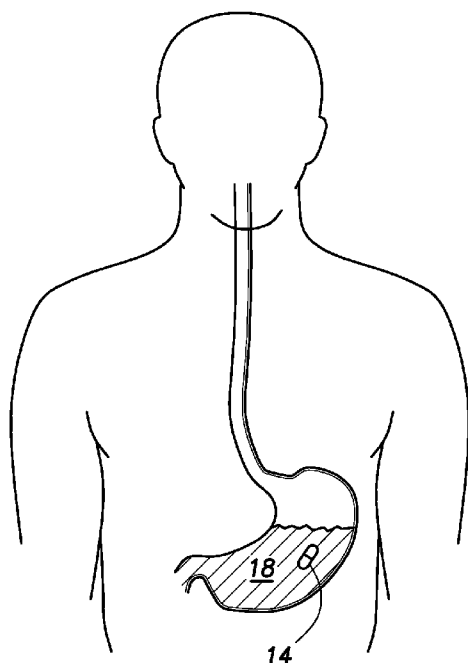


FIG. 1

(57) Abstract: The system of the present invention includes a conductive element, an electronic component, and a partial power source in the form of dissimilar materials. Upon contact with a conducting fluid, a voltage potential is created and the power source is completed, which activates the system. The electronic component controls the conductance between the dissimilar materials to produce a unique current signature. The system can also measure the conditions of the environment surrounding the system.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

4 April 2013

Published:

— *with international search report (Art. 21(3))*