



(51) International Patent Classification:
H05K 7/20 (2006.01) **H05K 7/14** (2006.01)

(21) International Application Number:
PCT/US2011/046918

(22) International Filing Date:
8 August 2011 (08.08.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/853,190 9 August 2010 (09.08.2010) US
12/853,192 9 August 2010 (09.08.2010) US

(71) Applicant (for all designated States except US): **AMAZON TECHNOLOGIES, INC.** [US/US]; P.O. Box 8102, Reno, Nevada 89507 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SALPETER, Isaac, A.** [US/US]; 1200 12th Avenue South, Suite 1200, Seattle, Washington 98144-2734 (US).

(74) Agent: **MEYERTONS, HOOD, KIVLIN, KOWERT & GOETZEL, P.C.**; Kowert, Robert C., P.O. Box 398, Austin, Texas 78767-0398 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DATA CENTER WITH FIN MODULES

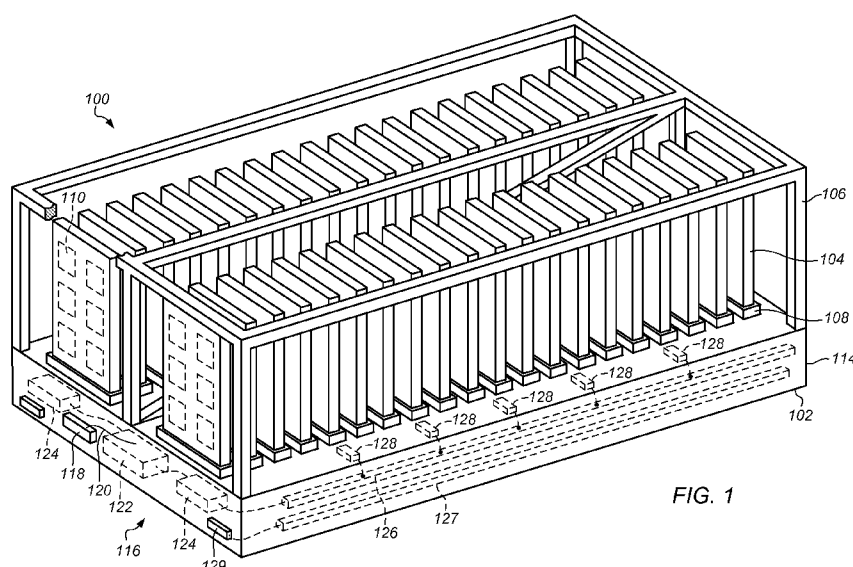


FIG. 1

(57) Abstract: A system for providing computing capacity includes a base module and two or more fin modules coupled to the base module. At least one of the fin modules includes one or more fins and two or more computer systems coupled to the fins. At least one of the fins to which the computer systems are coupled extends from the base module such that the fin has a primarily vertical orientation. An electrical power bus in the base module supplies power to computer systems of the fin modules. The site of operation may be indoors, out of doors, or in a limited shelter.