PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : A61M 5/00	A1	(11) International Publication Number: WO 00/41748
		(43) International Publication Date: 20 July 2000 (20.07.00)

(21) International Application Number: PCT/US00/01033

(22) International Filing Date: 14 January 2000 (14.01.00)

(30) Priority Data:
09/232,360 15 January 1999 (15.01.99) US

(71) Applicant: NEXMED HOLDINGS, INC. [US/US]; A Delaware Corporation, 350 Corporate Boulevard, Robbinsville, NJ 08691 (US).


(72) Inventors: YEAGER, James, L.; 820 Warwick Road, Deerfield, IL 60015 (US). MO, Joseph, Y.; One Bellevue Terrace, Princeton, NJ 08540 (US).

(74) Agents: CEPURITIS, Talivaldis et al.; Olson & Hierl, Ltd., 20 North Wacker Drive, 36th Floor, Chicago, IL 60606 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: MEDICAMENT DISPENSER

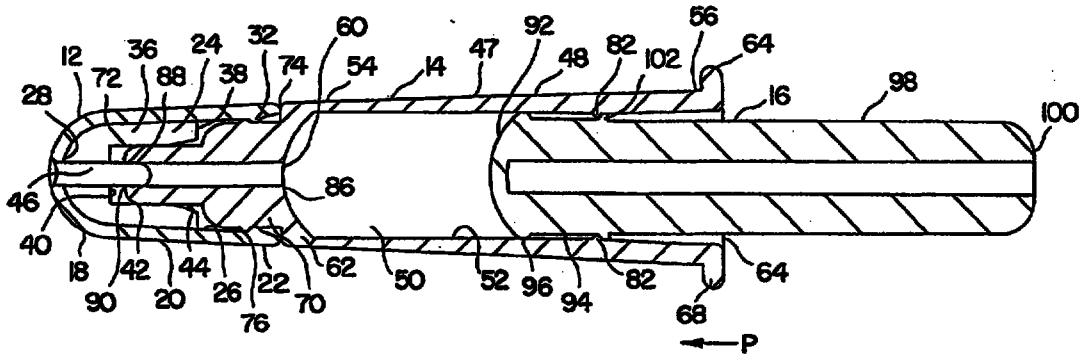

(57) Abstract

A disposable applicator (10) for dispensing a desired quantity of a substantially non-runny medicant, including a housing (14), a plunger (16), and a replaceable cap (12). The housing (14) is generally tubular having opposing proximal and distal ends and a tapered inner surface (52) extending therebetween. The distal end terminates in a dispensing nozzle (69) that defines a dispensing passageway (84) in substantial coaxial alignment with the housing (14), while the inner surface has an alignment device (80). The plunger (16) has a peripheral edge (96) and is configured for axial movement within the housing (14), where the peripheral edge (96) is aligned by the alignment device (80) and slidingly guided by the inner surface (52), supporting the plunger (16) therein. The plunger (16) is configured for slidable advancement toward the dispensing opening (90) by exertion of force by a user, so as to urge the medicament through the passageway (84).