

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 July 2006 (20.07.2006)

PCT

(10) International Publication Number
WO 2006/075835 A1

(51) International Patent Classification:
B65D 19/28 (2006.01)

[KR/KR]; 135-304 Kwanak Apartment, 1102 Buheung-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-789 (KR).

(21) International Application Number:
PCT/KR2005/002442

(74) Agent: **CHUNG, Tae Ryoum**; Dong Won Patent & Trade-mark Law Firm, 12th Fl. Hyundai Jeonwon Officetel, 1589-7, Socho-dong, Socho-gu, Seoul 137-070 (KR).

(22) International Filing Date: 27 July 2005 (27.07.2005)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2005-0004014 15 January 2005 (15.01.2005) KR

(71) Applicant (for all designated States except US): **AL-PALLET CO., LTD.** [KR/KR]; 302-1 Mok-ri, Dongtan-myeon, Hwaseong-si, Gyeonggi-do 445-812 (KR).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KIM, Seung Ki**

[Continued on next page]

(54) Title: A PALLET

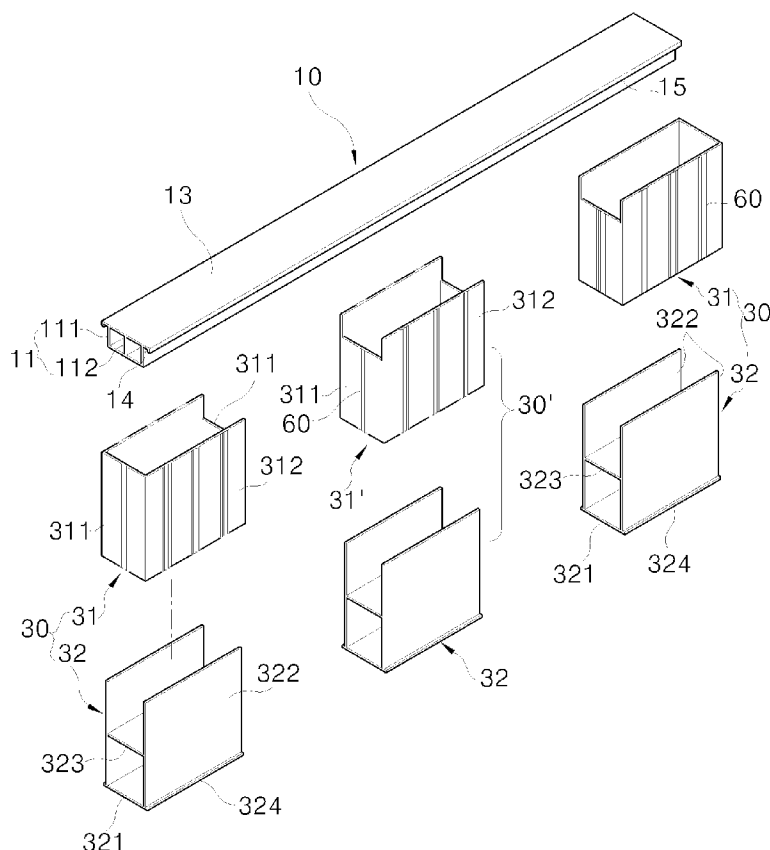

(57) Abstract: The present invention relates to a pallet including a plurality of supporting members (10), a plurality of upper plate members (20) placed parallel with one another on and across the supporting members, and a pair of prop members (30) placed at both ends of a bottom surface of each of the support members (10), wherein each of the prop members (30) is constructed such that the outer wall thereof has the same height as both sidewalls accommodated in grooves of the supporting members (10) and the inner wall thereof has a groove into which the body of the supporting member (10) is to be inserted, thereby, preventing possible accidents of injuries and damages by keeping dangerous sharp cut edges of the respective members from being exposed.

WO 2006/075835 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *with amended claims*