

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 November 2006 (23.11.2006)

PCT

(10) International Publication Number
WO 2006/123374 A1

(51) International Patent Classification:

G02C 5/22 (2006.01) **F16C 11/10** (2006.01)
F16C 11/06 (2006.01) **G02C 5/00** (2006.01)

(21) International Application Number:

PCT/IT2005/000287

(22) International Filing Date: 20 May 2005 (20.05.2005)

(25) Filing Language:

Italian

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **FOTO OTTICA DI CESCO STEFANO** [IT/IT]; Via G.B. Tiepolo, 2, I-31027 Spresiano (Treviso) (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CESCO, Stefano** [IT/IT]; Viale Caccianiga 68/8, I-31052 Maserada sul Piave (Treviso) (IT).

(74) Agents: **DRAGOTTI, Gianfranco** et al.; Dragotti & Associati S.r.l., Vicolo Campana, 3, I-31100 Treviso (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv))

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SPHERICAL JOINT

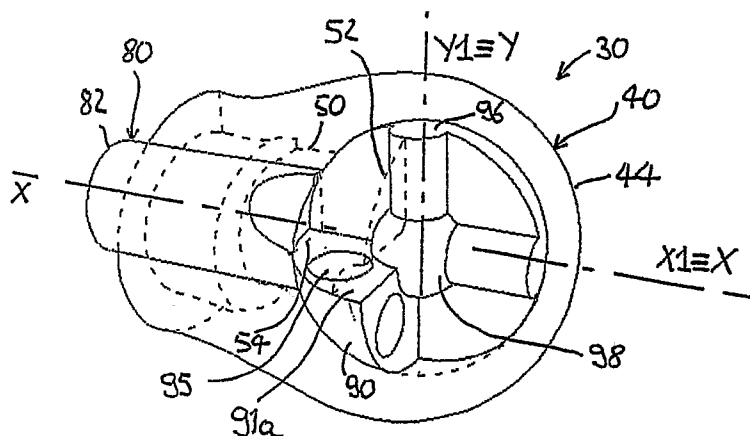

(57) Abstract: Spheric joint or spherical hinge (30; 130) for coupling together two members that are spatially orientable relative to each other, in which a head (84; 184) of the first member (80; 180) is retained in an accommodation (46; 146) of the second member (40; 140) by at least four points of contact located on a spherical surface according to the vertices of a pyramid containing the centre thereof, about which said head (84; 184) is adapted to rotate without translating. The hinge is characterized in that said accommodation (46; 146) or said head (84; 184) has a projecting boss (52; 152) confined in a gap (85; 186) of said head (84; 184) or said accommodation (46; 146), said gap (85; 186) having at least two consecutive

distinct spaces (85a, 85b; 187, 188) that define a travelling path (85; 186) for said boss (52; 152).