



(51) International Patent Classification:

B41J 2/14 (2006.01) C09D 11/40 (2014.01)
B41J 2/045 (2006.01)

(21) International Application Number:

PCT/EP2023/065840

(22) International Filing Date:

13 June 2023 (13.06.2023)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

22178741.9 13 June 2022 (13.06.2022) EP

(71) Applicant: **3C PROJECT MANAGEMENT LIMITED** [IE/IE]; The Coppins, Manor Avenue, Greystones, Co Wicklow A63 HF96 (IE).

(72) Inventor: **MCAVOY, Gregory John**; c/o 3C PROJECT MANAGEMENT LIMITED, The Coppins, Manor Avenue, Greystones, Co Wicklow A63 HF96 (IE).

(74) Agent: **HINDLES LIMITED**; Clarence House, 131-135 George Street, Edinburgh EH2 4JS (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A MONOLITHIC INKJET PRINthead AND INK COMPOSITIONS

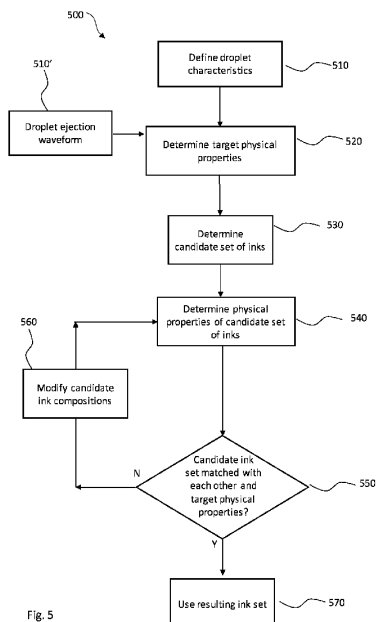


Fig. 5

(57) Abstract: The present disclosure provides a monolithic inkjet printhead for ejecting a set of ink compositions, wherein the printhead comprises at least one substrate and the substrate comprises a plurality of ejectors each comprising: (i) a nozzle, (ii) a chamber for receiving an ink composition of the set, wherein said chamber is in fluid communication with said nozzle, and (iii) a piezoelectric actuator coupled to said nozzle for selectively ejecting said ink composition therefrom, wherein each ejector is configured to eject ink droplets of the different ink compositions with corresponding volume and velocity. The disclosure further provides a set of ink compositions *per se* with matched values of viscosity, density and surface tension, a printing apparatus, and methods thereof.