

Transmit assistance information to at least one second terminal device if a periodic reporting condition or a preset trigger condition is met, where the assistance information is used for the at least one second terminal device to perform sidelink transmission

101

FIG. 1

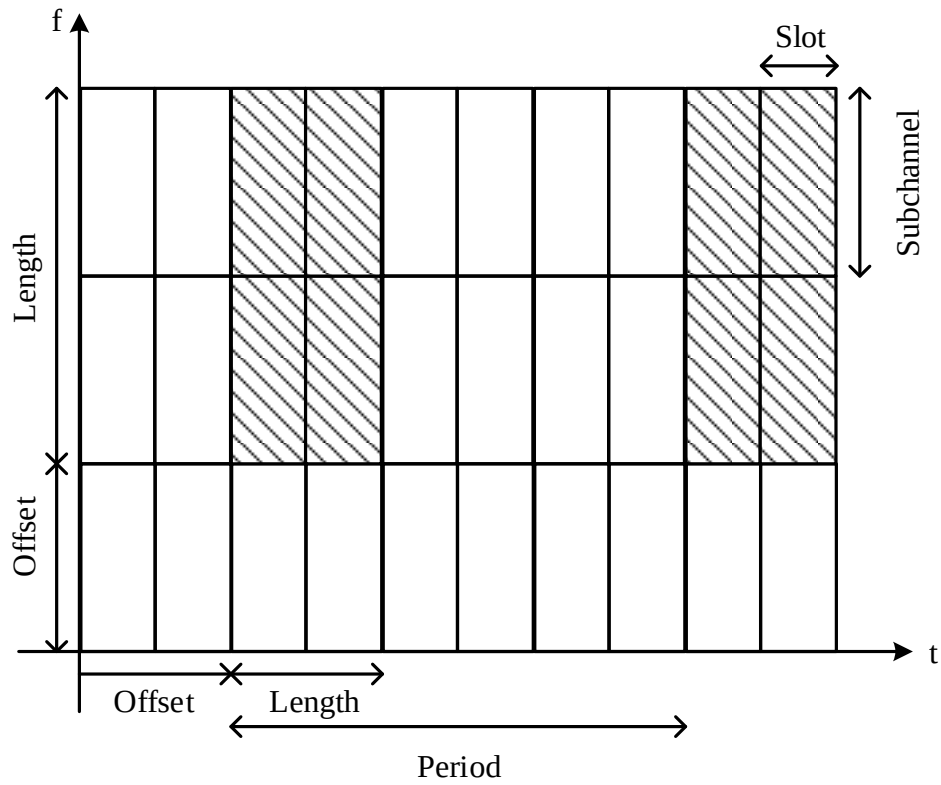


FIG. 2

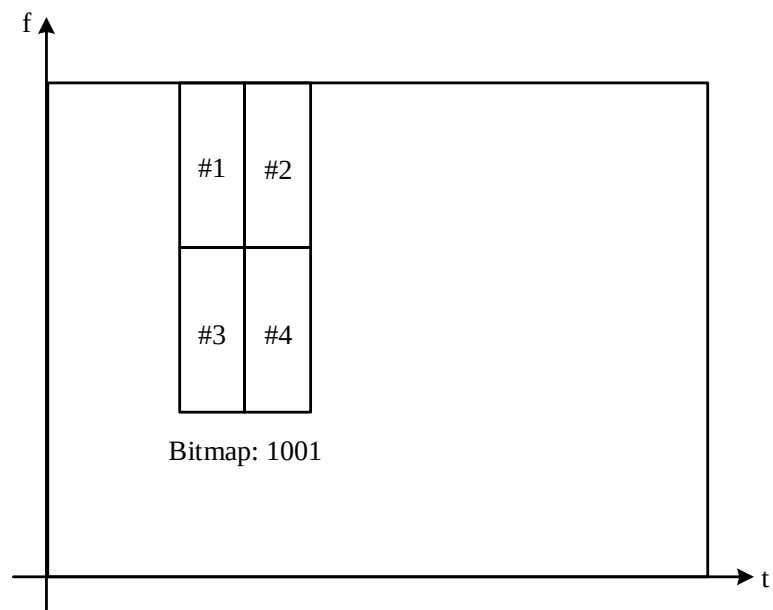


FIG. 3

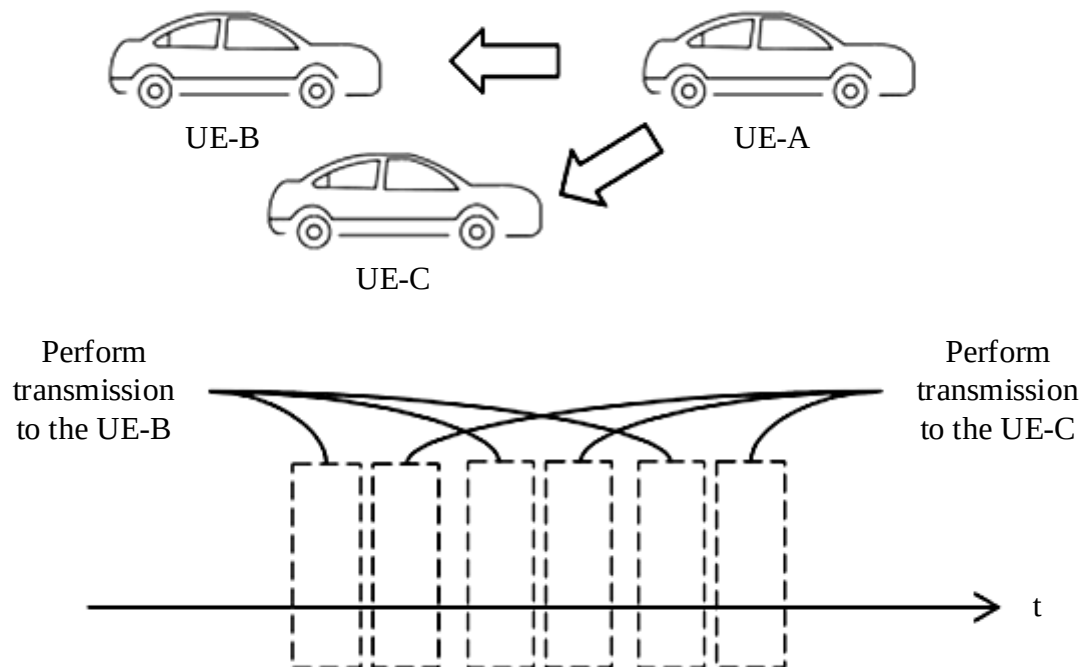


FIG. 4

3/6

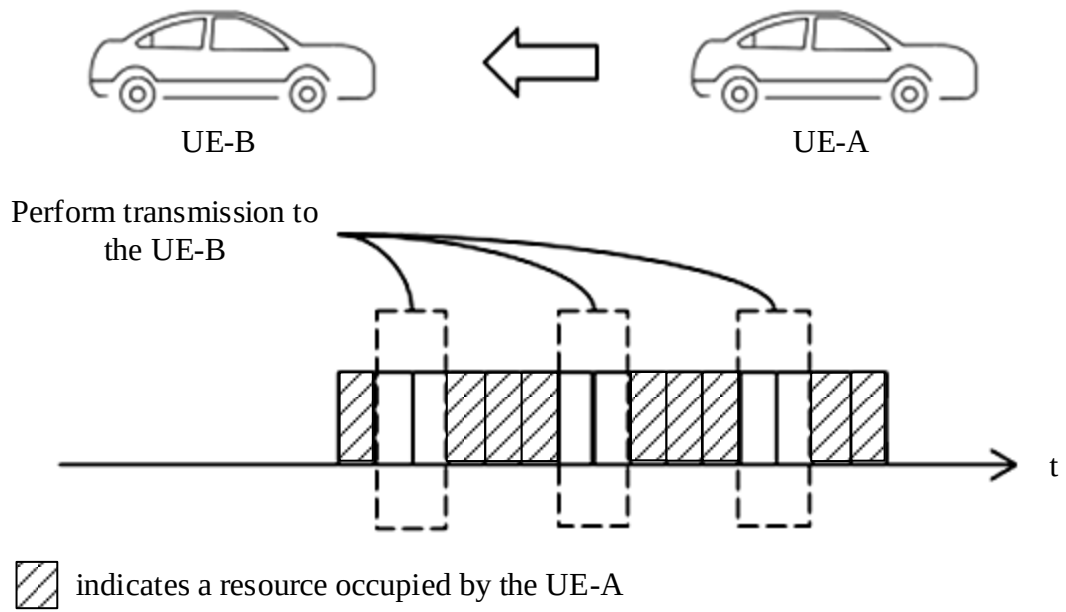


FIG. 5

4/6

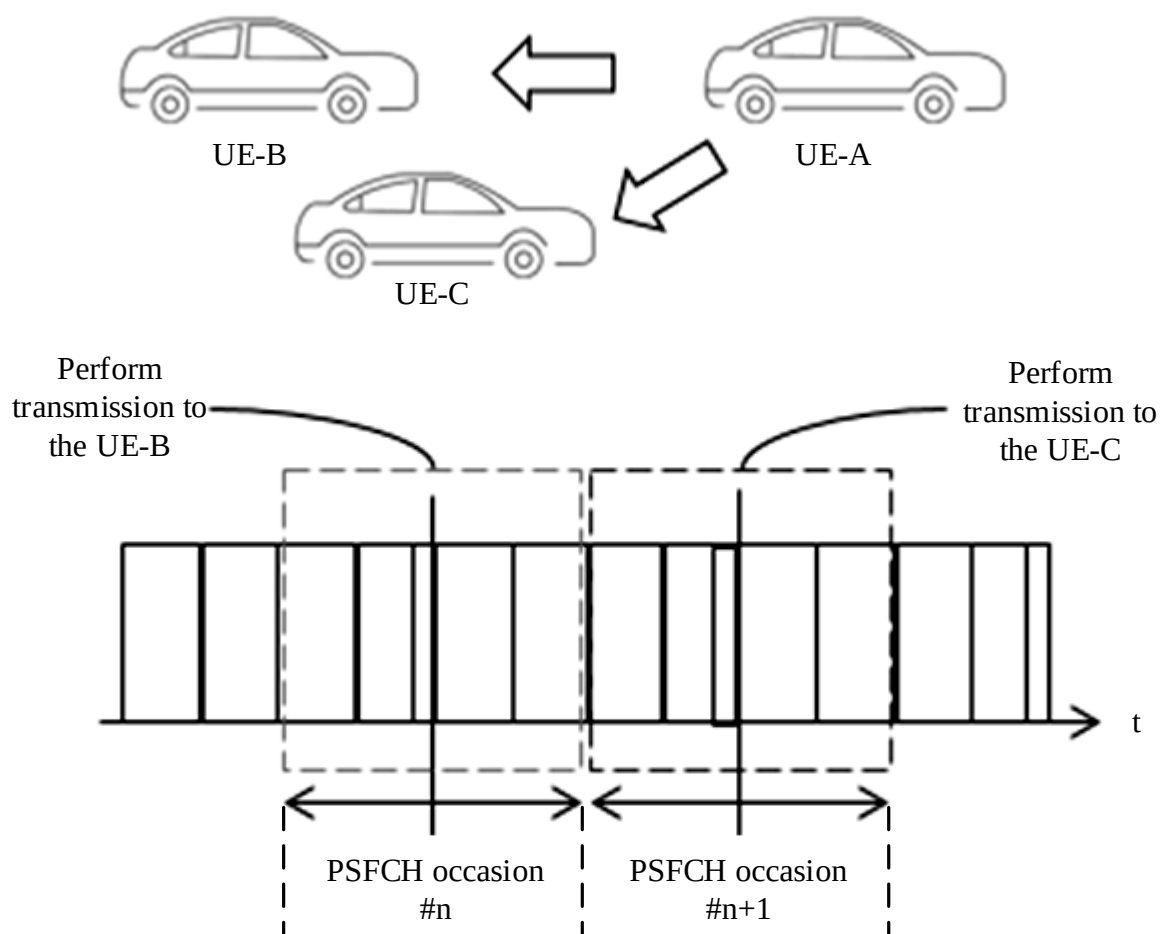


FIG. 6

Receive assistance information, where the assistance information is transmitted by a first terminal device in a case that a periodic reporting condition or a preset trigger condition is met, and the assistance information is used for sidelink transmission

201

FIG. 7

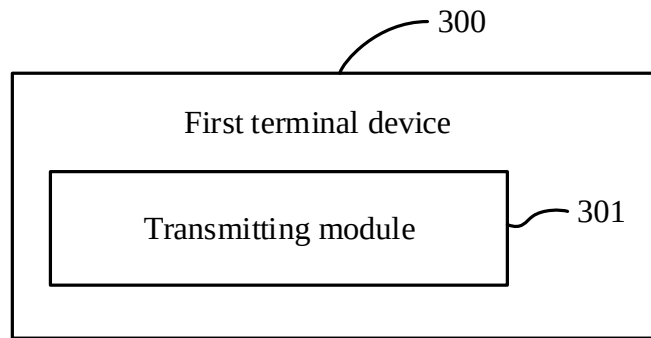


FIG. 8

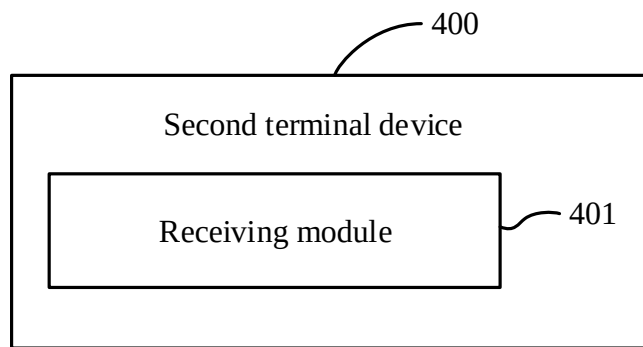


FIG. 9

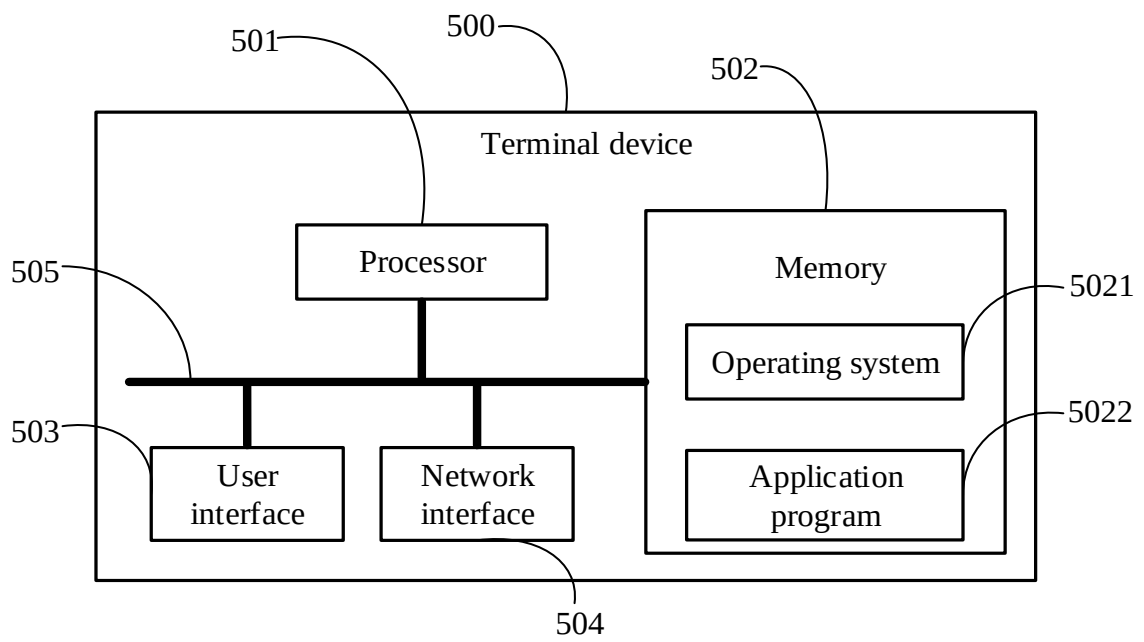


FIG. 10