(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
3 July 2008 (03.07.2008)

PCT

(10) International Publication Number
WO 2008/078836 A1

(51) International Patent Classification:
G03G 21/18 (2006.01) *G03G 21/16* (2006.01)

(21) International Application Number:
PCT/JP2007/075364

(22) International Filing Date:
25 December 2007 (25.12.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2006-346190	22 December 2006 (22.12.2006)	JP
2007-042665	22 February 2007 (22.02.2007)	JP
2007-330303	21 December 2007 (21.12.2007)	JP

(71) Applicant *(for all designated States except US)*: **CANON KABUSHIKI KAISHA** [JP/JP]; 30-2 Shimomaruko 3-Chome, Ohta-Ku, Tokyo 146-8501 (JP).

(72) Inventors; and


(75) Inventors/Applicants *(for US only)*: **UENO, Takahito** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501 (JP). **MIYABE, Shigeo** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501 (JP). **MORIOKA, Masanari** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501 (JP). **HISANO, Masato** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501 (JP).

(74) Agent: **YAMADA, Ryuichi**; TOKO International Patent Office, Hasegawa Bldg. 4F, 7-7, Toranomon 3-chome, Minato-ku, Tokyo 105-0001 (JP).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL,

[Continued on next page]

(54) Title: PROCESS CARTRIDGE, ELECTROPHOTOGRAPHIC IMAGE FORMING APPARATUS, AND ELECTROPHOTOGRAPHIC PHOTOSENSITIVE DRUM UNIT

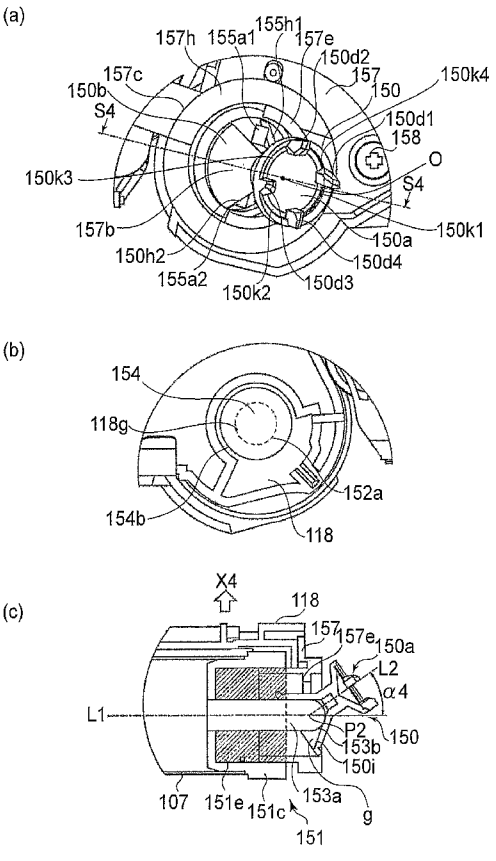

(57) Abstract: A process cartridge (B) for use with a main assembly of an image forming apparatus, the main assembly including a driving shaft (180), wherein the process cartridge is dismountable from the main assembly in a direction perpendicular to an axial direction of the driving shaft (180), the process cartridge includes i) a photosensitive drum (107) being rotatable about an axis thereof; ii) process means (108, 110) actable on the drum,- iii) a coupling member (150) engageable with the driving shaft for rotating the drum (107), the coupling member being capable of taking a transmitting angular position for transmitting the rotational force to the drum (107) and a disengaging angular position in which the coupling member is inclined away from the axis of the drum (107) from the transmitting angular position, wherein when the process cartridge (B) is dismounted from the main assembly in a direction perpendicular to the axis of the drum (107), the coupling member (150) moves from the transmitting angular position to the disengaging angular position.

WO 2008/078836 A1

IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*