



(51) International Patent Classification:
E21B 19/00 (2006.01)

(21) International Application Number:
PCT/EP2014/050164

(22) International Filing Date:
7 January 2014 (07.01.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20130036 8 January 2013 (08.01.2013) NO

(71) Applicant: FMC KONGSBERG SUBSEA AS [NO/NO];
P.O. Box 1012, N-3601 Kongsberg (NO).

(72) Inventor: CARLSEN, Hans-Paul; Heddalsvegen 554, N-
3677 Notodden (NO).

(74) Agents: ONSAGERS AS et al.; P.O. Box 1813 Vika, N-
0123 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
8 January 2015

(54) Title: CYLINDER RELEASE ARRANGEMENT

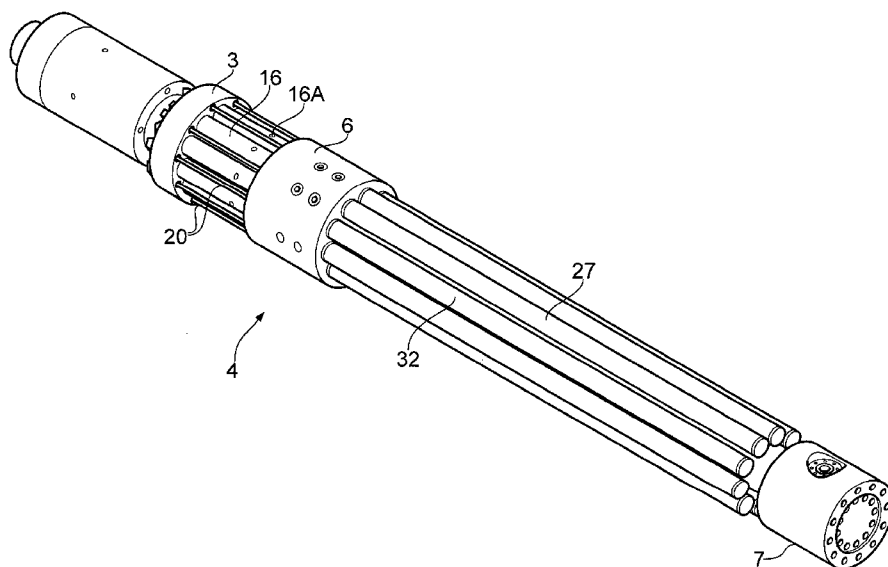


FIG. 1

(57) Abstract: The invention relates a cylinder release arrangement, wherein at least one cylinder is arranged with a piston within the cylinder, and a cylinder head closing off one end of the cylinder, forming a chamber between the piston and the cylinder head, wherein the cylinder is provided to arrange a leakage of fluid from one side of a piston to the other side of the piston, when the piston is in a given position within the cylinder, and release means are provided for the subsequently controlled release of the cylinder head from the cylinder. The invention also comprises a cylinder arrangement with a release mechanism.