



- (51) **International Patent Classification:**
A61M 39/04 (2006.01) *A61M 39/00* (2006.01)
A61M 39/26 (2006.01)
- (21) **International Application Number:**
PCT/IB2012/052736
- (22) **International Filing Date:**
31 May 2012 (31.05.2012)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (30) **Priority Data:**
TO2011A000481 1 June 2011 (01.06.2011) IT
- (71) **Applicant (for all designated States except US):** **INDUSTRIE BORLA S.P.A.** [IT/IT]; Via G. Di Vittorio, 7bis, I-10024 Moncalieri (Torino) (IT).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** **GUALA, Gianni** [IT/IT]; Strada Villa Zanetti, 28/18, I-10133 Torino (IT).
- (74) **Agent:** **BUZZI, Franco**; Via Maria Vittoria, 18, I-10123 Torino (IT).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) **Title:** INJECTION SITE FOR TUBULAR MEDICAL CONNECTORS

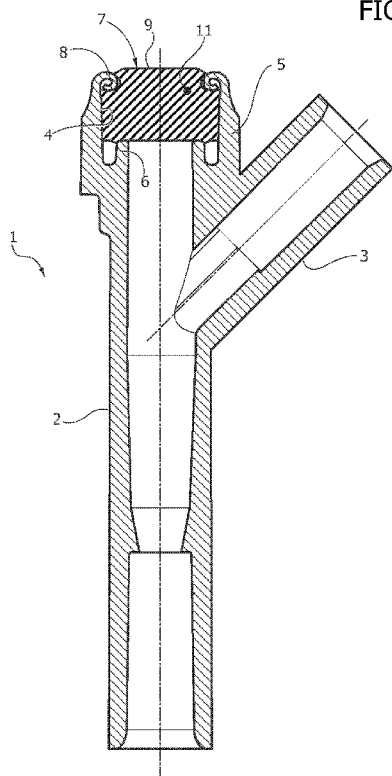


FIG. 1

(57) **Abstract:** Injection site for tubular medical connectors (1), comprising a perforable body (7) inserted in a seat (4) of the connector (1) delimited by an annular wall (5) having a retention edge (8) turned in against the outer end (9) of the perforable body (7), said outer end (9) being formed with a peripheral annular step (10) and with an exposed portion with reduced cross section (11) projecting axially. The peripheral step (10) is defined by an annular groove (12) having a shape complementary to that of the turned-in retention edge (8) of the connector (1), and the portion with reduced cross section (11) of the perforable body (7) connects up to the groove (12) through an annular surface (13) projecting radially above at least part of the turned-in retention edge (8) and resting against it.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:

17 January 2013