



- (51) International Patent Classification:
F16K 31/128 (2006.01) *F16K 1/12* (2006.01)
- (21) International Application Number:
PCT/EP2015/055136
- (22) International Filing Date:
12 March 2015 (12.03.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14159474.7 13 March 2014 (13.03.2014) EP
- (71) Applicant: IMI HYDRONIC ENGINEERING INTERNATIONAL SA [CH/CH]; Route de Crassier 19, CH-1262 Eysins (CH).
- (72) Inventors: VOLOVEC, Peter; Zupelevac 58, 8258 Kapele (SI). LAH, Slavko; Marof 18, 8250 Brezice (SI). LAZOV, Slave; Razlagova ulica 11A, 3000 Celje (SI).
- (74) Agent: SOMLO, Tommy; P.O. Box 11394, S-404 28 Göteborg (SE).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: PILOT VALVE ARRANGEMENT

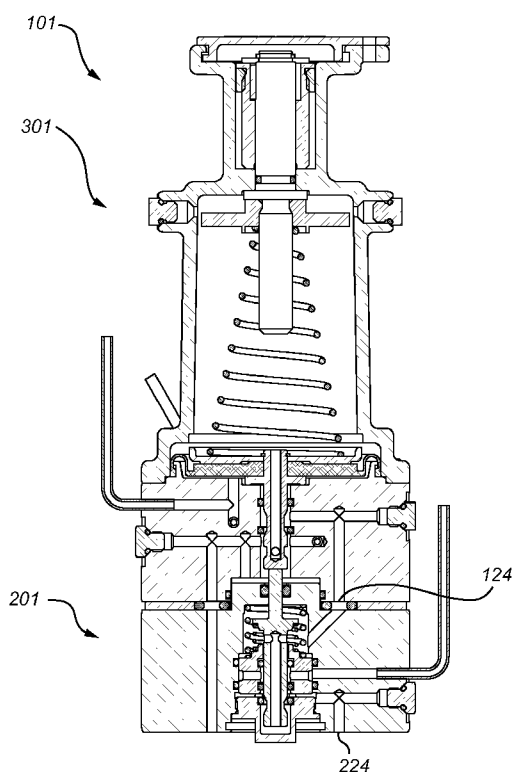


Fig. 2b

(57) Abstract: The present inventive concept relates to a pilot valve arrangement comprising: a first pilot valve part and a second pilot valve part. The second pilot valve part comprising: a second pilot valve body comprising: a compartment, a low pressure fluid inlet for receiving fluid from the first pilot valve part, and a high pressure fluid inlet, and a fluid outlet for receiving fluid from the low pressure and high pressure inlets via said compartment and providing fluid to a piloted valve. In a first state, the second pilot valve of the pilot valve arrangement provides for a first fluid flow path within the compartment to enable the low pressure fluid inlet to be in fluid communication with the fluid outlet via the first fluid flow path. In a second state, a second fluid flow path within the compartment to enable the high pressure fluid inlet to be in fluid communication with the fluid outlet via the second fluid flow path. The second fluid flow path being different from the first fluid flow path.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*