

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 January 2006 (26.01.2006)

PCT

(10) International Publication Number
WO 2006/009184 A1

(51) International Patent Classification⁷: **B23Q 11/10**,
B23B 47/00

(21) International Application Number:
PCT/JP2005/013341

(22) International Filing Date: 13 July 2005 (13.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-209624 16 July 2004 (16.07.2004) JP
2004-229766 5 August 2004 (05.08.2004) JP

(71) Applicant (for all designated States except US): **NITTO KOHKI CO., LTD.** [JP/JP]; 9-4, Nakaikegami 2-chome, Ohta-ku, Tokyo, 1468555 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SHIMADA, Keisuke** [JP/JP]; c/o NITTO KOHKI CO., LTD., 9-4, Nakaikegami 2-chome, Ohta-ku, Tokyo, 1468555 (JP).

(74) Agent: **ITO, Shigeru**; 3F, Akasaka BT bldg., 4-8, Akasaka 1-chome, Minato-ku, Tokyo, 1070052 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ROTARY CUTTING MACHINE

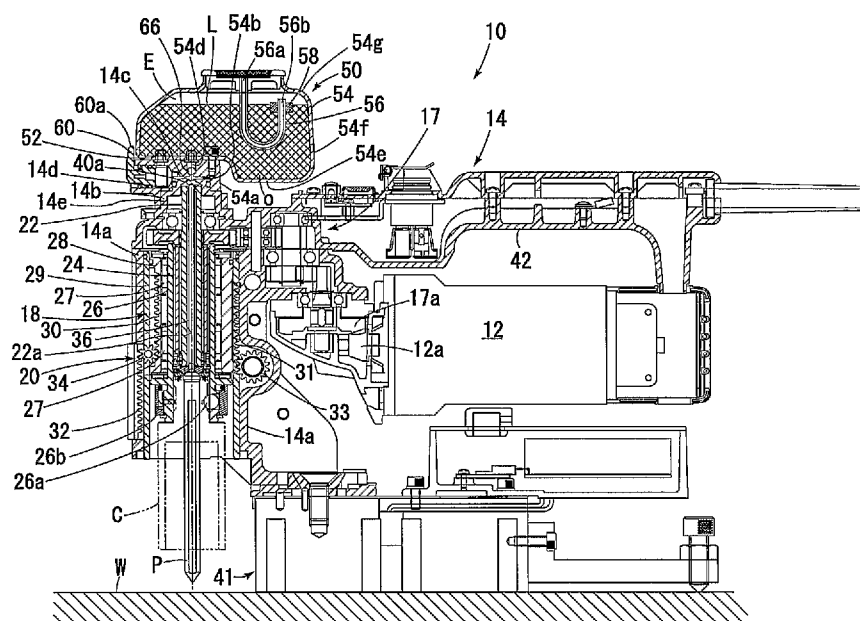

(57) Abstract: A rotary cutting machine 10, if inclined at large angles, provides positive supply of a cutting oil and avoids leakage of the cutting oil. The machine 10 has a machine body 14 and an arbor 18. An oil tank 50 is mountable to the machine body 14 so that the oil tank 50 is oriented at a given angular position about the central axis of the arbor 18. The tank body 54 has an interior space. The interior space is divided into a first interior part and a second interior part by an imaginary plane containing the central axis of rotation of the arbor. The first interior part is less in volume than the second interior part.

WO 2006/009184 A1