

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau

(43) International Publication Date  
10 June 2021 (10.06.2021)



(10) International Publication Number  
**WO 2021/110960 A1**

(51) International Patent Classification:  
*A61M 25/01* (2006.01)

(21) International Application Number:  
PCT/EP2020/084725

(22) International Filing Date:  
04 December 2020 (04.12.2020)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
19306590.1 06 December 2019 (06.12.2019) EP

(71) Applicant: **BASECAMP VASCULAR** [FR/FR]; Allée  
des Landais, 51100 REIMS (FR).

(72) Inventors: **CAZENEUVE, Jean-Baptiste**; 3 allée  
Edouard Quincey, 94200 Ivry-sur-Seine (FR). **MAIANO,  
Camille**; 1 Lesven, 29810 Brélès (FR).

(74) Agent: **ICOSA**; 83 avenue Denfert-Rochereau, 75014 Paris  
(FR).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,  
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,  
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,  
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,  
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,  
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

(54) Title: ANCHORING ELEMENTS FOR A STEERABLE DEVICE

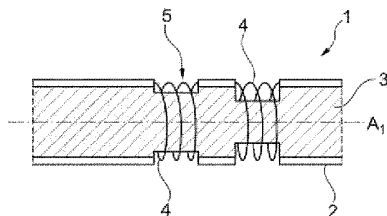


Fig. 1A

(57) Abstract: A steerable device (1) comprising a flexible axially elongated member (2), at least one actuating means (3, 30) arranged alongside the periphery of said elongated member, at least one fastening means (4) configured to fasten at least partially the at least one actuating means to the flexible elongated member distal end, said fastening means being in direct contact with the flexible elongated member, at least one anti-return means (5, 51-57) configured to keep the at least one actuating means from sliding alongside the periphery of the flexible elongated member distal end, characterized in that the at least one anti-return means and the at least one fastening means are in axial abutting contact.