

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2001 (22.03.2001)


PCT

(10) International Publication Number
WO 01/20085 A1

- (51) International Patent Classification⁷: E03D 1/22 [AU/AU]; 38 Barrett-Lennard Parade, Winthrop, W.A. 6150 (AU).
- (21) International Application Number: PCT/AU00/01120
- (22) International Filing Date:
15 September 2000 (15.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PQ 2935 16 September 1999 (16.09.1999) AU
- (71) Applicant (for all designated States except US): VGM (AUST) PTY LTD [AU/AU]; 38 Barrett-Lennard Parade, Winthrop, W.A. 6150 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): KHOO, Kah, Hin
- (74) Agent: PHILLIPS ORMONDE & FITZPATRICK; 367 Collins Street, Melbourne, VIC 3000 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DUAL VOLUME DISCHARGE OUTLET VALVE APPARATUS

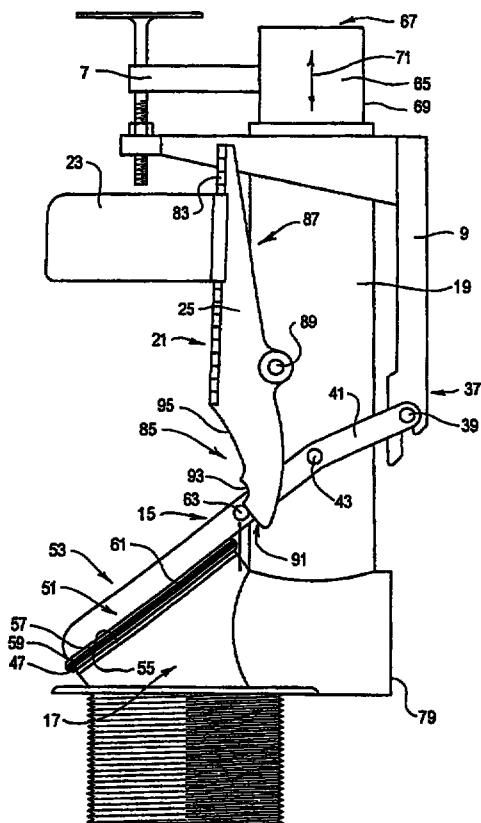

(57) Abstract: A dual volume discharge apparatus for selectively discharging a full flush or a half flush of liquid from a reservoir, said discharge apparatus including: actuator means (1) selectively moveable from a closed position to either a full flush position or a half flush position, sealing means (11) moveable by said actuator means (1) from a closed position to either a full flush position or a half flush position, said sealing means being biased toward said closed position when in said half flush position, liquid outlet (17) which is sealed by said sealing means (11) to prevent flow of liquid out of said reservoir when said sealing means (11) is in said closed position and which allows flow of liquid out of said reservoir when said sealing means (11) is in the full flush position or the half flush position, stop means (21) co-operable with said sealing means and being biased towards position capable of holding said sealing means in said half flush position when said actuator means (1) is moved to said half flush position until a predetermined volume of liquid has been discharged from said reservoir and then allowing said sealing means (11) to move to said closed position thereafter.

WO 01/20085 A1



Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.