

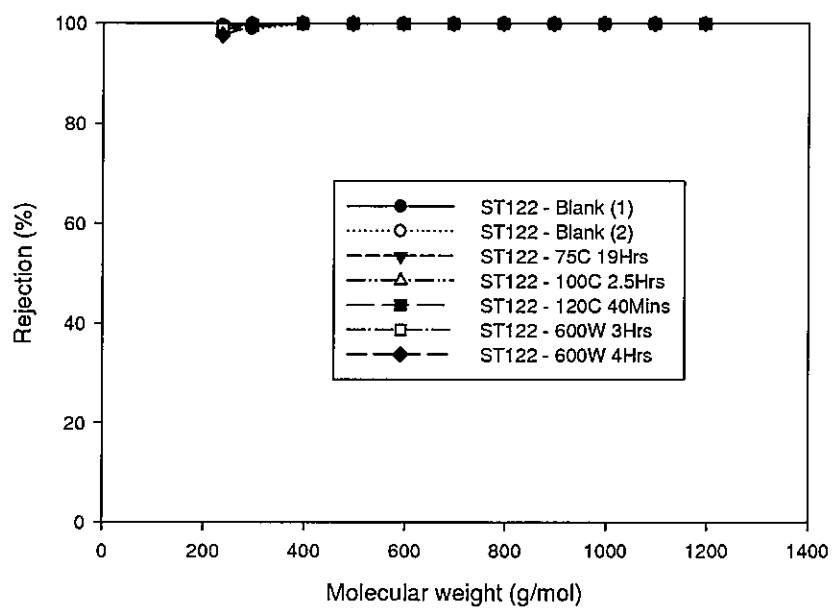
Figure 1

Figure 1: Rejection performance of Starmem™ 122 membranes operated at 30bar and 30°C having been subjected to thermal and microwave curing cycles. Toluene flux for these membranes is presented in Table 3, Entries 1-7.