

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局

(43) 国際公開日
2011年8月4日(04.08.2011)



(10) 国際公開番号
WO 2011/093232 A1

- (51) 国際特許分類:
G11B 5/84 (2006.01)
- (21) 国際出願番号: PCT/JP2011/051182
- (22) 国際出願日: 2011年1月24日(24.01.2011)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2010-014272 2010年1月26日(26.01.2010) JP
- (71) 出願人 (米国を除く全ての指定国について): 昭和電工株式会社(SHOWA DENKO K.K.) [JP/JP]; 〒1058518 東京都港区芝大門一丁目13番9号 Tokyo (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 野口 智之(NOGUCHI Tomoyuki) [JP/JP]; 〒2100858 神奈川県川崎市川崎区大川町5-1 昭和電工株式会社内 Kanagawa (JP). 原 克雄(HARA Katsuo) [JP/JP]; 〒2900067 千葉県市原市八幡海岸通5番

の1 昭和電工エレクトロニクス株式会社内 Chiba (JP). 齊藤 将人(SAITO Masato) [JP/JP]; 〒2900067 千葉県市原市八幡海岸通5番の1 昭和電工エレクトロニクス株式会社内 Chiba (JP). 木下 優志(KINOSHITA Yushi) [JP/JP]; 〒2900067 千葉県市原市八幡海岸通5番の1 昭和電工エレクトロニクス株式会社内 Chiba (JP).


- (74) 代理人: 志賀 正武, 外(SHIGA Masatake et al.); 〒1006620 東京都千代田区丸の内一丁目9番2号 Tokyo (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[続葉有]

(54) Title: METHOD FOR PRODUCING AND DEVICE FOR PRODUCING MAGNETIC RECORDING MEDIUM

(54) 発明の名称: 磁気記録媒体の製造装置及び製造方法

[図2]

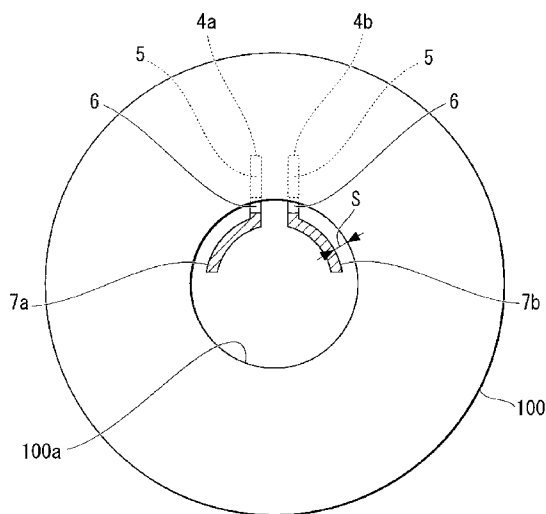

AA X-X' 断面図

AA X-X' Cross-Sectional View

(57) Abstract: Disclosed are a method for producing and a device for producing a magnetic recording medium that enable the formation of a lubricant membrane at an even thickness on the surface of the magnetic recording medium. Specifically, the device, which is for producing the magnetic recording medium, and which forms a lubricant membrane on the surface of the magnetic recording medium by means of immersing the disc-shaped magnetic recording medium—which has a central hole—into an immersion tank in which there is liquid lubricant, and then raising the magnetic recording medium up from the immersion tank, is characterized by: being provided with a hanger mechanism that is inserted into the central hole of the aforementioned magnetic recording medium, thus supporting said magnetic recording medium in a hanging state, and a raising/lowering mechanism that performs a raising/lowering operation on one of either the aforementioned hanger mechanism or the aforementioned immersion tank with respect to the other; and by the aforementioned hanger mechanism having a support plate, the upper end of which contacts the inner perimeter of the aforementioned magnetic recording medium, and an excess fluid removal plate that is provided extending from the bottom end of the aforementioned support plate and that forms a gap between itself and the inner perimeter of the aforementioned magnetic recording medium along said inner perimeter.

(57) 要約:

[続葉有]