(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/015757 A1

(51) International Patent Classification[7]: H01L 21/56

(21) International Application Number:
PCT/NL2003/000577

(22) International Filing Date: 12 August 2003 (12.08.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1021266 13 August 2002 (13.08.2002) NL

(71) Applicants *(for all designated States except US)*: **OTB GROUP B.V.** [NL/NL]; Luchthavenweg 10, NL-5657 EB Eindhoven (NL). **BOSCHMAN TECHNOLOGIES B.V.** [NL/NL]; Nieuwgraaf 336, NL-6921 RS Duiven (NL).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **EVERS, Marinus, Franciscus, Johanus** [NL/NL]; Ginderover 33, NL-5591 JM Heeze (NL). **VAN WEELDE, Antonie** [NL/NL]; Vossendel 3, NL-6923 SB Groessen (NL).

(74) Agent: **PRINS, A.W.**; Nieuwe Parklaan 97, NL-2587 BN Den Haag (NL).


(81) Designated States *(national)*: AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR COMPLETELY OR PARTLY COVERING AT LEAST ONE ELECTRONIC COMPONENT WITH A COMPOUND

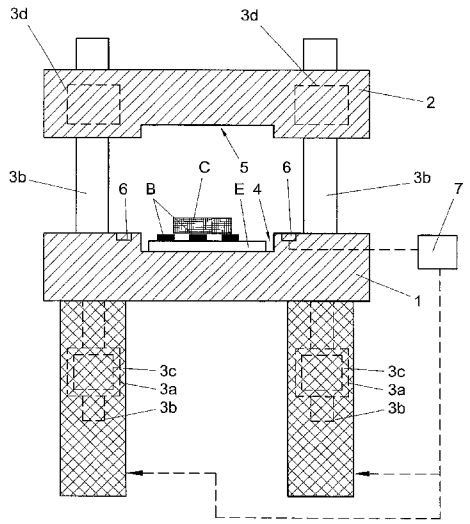

(57) Abstract: A method and apparatus for at least partly covering at least one electronic component with compound, the apparatus being provided with a first mold half and a second mold half, the first mold half being moveable relative to the second mold half, while means are provided for placing an electronic component on a mold half for inclusion of this component in a mold cavity defined by the two mold halves, the first mold half being provided with a number of actuators with the aid of which the position of the first mold half relative to the second mold half is continuously and accurately regulable, while the distance between the two mold halves is continuously regulated and, if desired, adjusted during the two mold halves being moved towards each other and during their being held in a position when moved towards each other.

WO 2004/015757 A1

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.