



(51) International Patent Classification:

A62B 1/14 (2006.01) A62B 35/04 (2006.01)
A62B 35/00 (2006.01)

(21) International Application Number:

PCT/US2013/050868

(22) International Filing Date:

17 July 2013 (17.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/551,845 18 July 2012 (18.07.2012) US
13/891,871 10 May 2013 (10.05.2013) US

(71) Applicant: **D B INDUSTRIES, LLC** [US/US]; 3833 Sala Way, Red Wing, MN 55066-5005 (US).

(72) Inventors: **CASEBOLT, Scott, C.**; 1460 Laurel Avenue, St. Paul Park, MN 55071 (US). **BLOMBERG, John, P.**; 120 Camelsback Road, New Ulm, MN 56073 (US). **MILLER, Rick, G.**; 621 17th Street West, Hastings, MN 55033 (US).

(74) Agent: **MAU, Michael, L.**; IPLM Group, P.A., Post Office Box 18455, Minneapolis, MN 55418 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

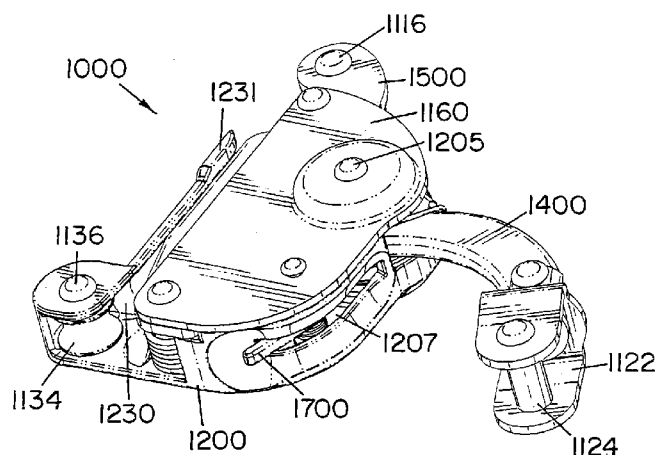
(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

[Continued on next page]

(54) Title: ROPE GRAB

FIG.16C

(57) Abstract: A rope grab for a vertical fall protection system is provided. The rope grab includes a housing with an elongated member passage. The elongated member passage is configured to receive an elongated member. A locking cam is pivotally coupled to the housing and selectively engages an elongated member received in the elongated member passage. A cam biasing member positioned to provide a relatively slight biasing force on the locking cam in a direction towards an elongated member received in the elongated member passage. A locking arm, pivotally coupled to the housing, has a first end that is configured to be coupled to a safety harness of a user and a second end that selectively engages the locking cam to lock the locking cam on an elongated member in the elongated member passage during a fall event.



(88) Date of publication of the international search report:

12 September 2014