



- (51) International Patent Classification:
F04C 28/00 (2006.01) *H02M 3/00* (2006.01)
- (21) International Application Number:
PCT/BR2012/000036
- (22) International Filing Date:
25 February 2012 (25.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PI1100270-0 25 February 2011 (25.02.2011) BR
- (71) Applicant (for all designated States except US): **WHIRLPOOL S.A.** [BR/BR]; Av. das Nações Unidas, 12.995, 32º andar, Brooklin Novo, 04578-000 São Paulo, SP (BR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MAASS, Günter Johann** [BR/BR]; Guia Lopes, 346, apto. 304, 89218-060 - Joinville - SC (BR).
- (74) Agent: **DANNEMANN, SIEMSEN, BIGLER & IPANEMA MOREIRA**; Caixa Postal 2142, Rua Marquês de Olinda, 70, 22251-040, Rio de Janeiro - RJ (BR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (88) Date of publication of the international search report:
27 June 2013

(54) Title: A SYSTEM AND METHOD OF REMOTELY CONNECTING AND DISCONNECTING THE AUXILIARY POWER SUPPLY OF A FREQUENCY INVERTER

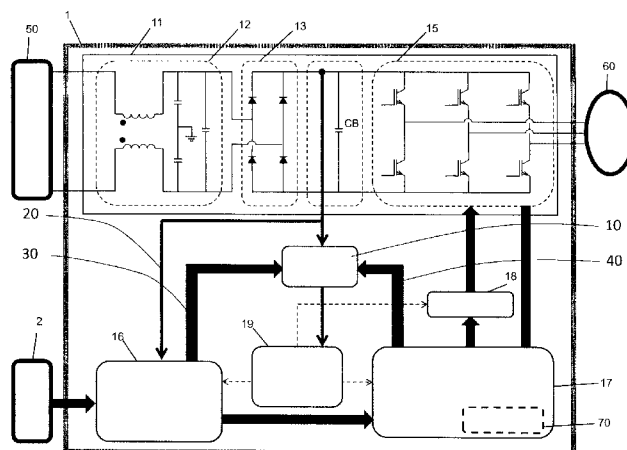


FIG. 5

(57) Abstract: The present invention refers to a system and a method of remotely connecting and disconnecting an auxiliary power supply (19) of the frequency inverter for variable capacity compressors employed in cooling systems, wherein the inverter comprises a circuit breaker (10) which acts such that when it receives an external signal to activate the auxiliary power supply (30) indicating that the auxiliary supply (19) should be connected, the circuit breaker (10) enables the running of the auxiliary power supply (19), which activates the running of the inverter, and the inverter begins sending, continually, the internal maintenance signal to activate the auxiliary supply (40) to the circuit breaker (10) indicating that the auxiliary supply should be kept running, making the circuit breaker maintain the auxiliary power supply (19) enabled, and when the circuit breaker (10) receives an external deactivation signal from the auxiliary supply (30) indicating that the auxiliary supply should be disconnected, the inverter stops sending the signal to maintain the auxiliary supply activated (40) to the circuit breaker (10), and the circuit breaker (10) disables the auxiliary power supply (19), deactivating the running of the inverter.