

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2004 (06.05.2004)


PCT

(10) International Publication Number
WO 2004/038760 A2

- (51) International Patent Classification⁷: **H01L** W. [US/US]; 408 East Minnehaha Parkway, Minneapolis, MN 55419 (US).
- (21) International Application Number: PCT/US2003/027562 (74) Agents: **CHRISTENSEN, Douglas, J.** et al.; Patterson, Thunte, Skaar & Christensen, P.A., 4800 IDS Center, 80 South Eighth Street, Minneapolis, MN 55402-2100 (US).
- (22) International Filing Date: 3 September 2003 (03.09.2003) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/407,749 3 September 2002 (03.09.2002) US
- (71) Applicant (*for all designated States except US*): **ENTEGRIS, INC.** [US/US]; 3500 Lyman Boulevard, Chaska, MN 55318 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **EXTRAD, Charles,** (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HIGH TEMPERATURE, HIGH STRENGTH, COLORABLE MATERIALS FOR USE WITH ELECTRONICS PROCESSING APPLICATIONS

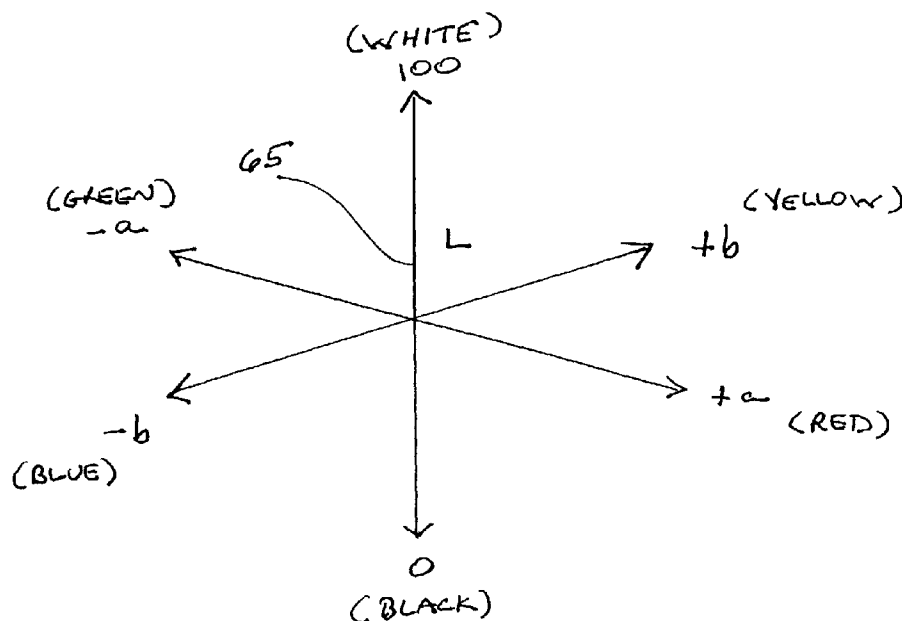

(57) Abstract: Certain embodiments include an electrostatic-discharge safe tray for receiving and/or storing electronic components, e.g., read/write heads. Such trays may be made from a mixture of at least one high temperature, high strength polymer, at least one metal oxide, and at least one pigment. The use of the metal oxides as conductive materials advantageously allows for light-colored electrostatic-discharge safe materials to be made, so that such materials may be colored with pigments without compromise of material performance specifications.

WO 2004/038760 A2



Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.