

A first network device performs DC negotiation with a first terminal, and establishes a first DC based on a DC negotiation process, where the first DC is used for transmitting interaction data between the first terminal and a second network device 101

Fig. 1



Fig. 2a

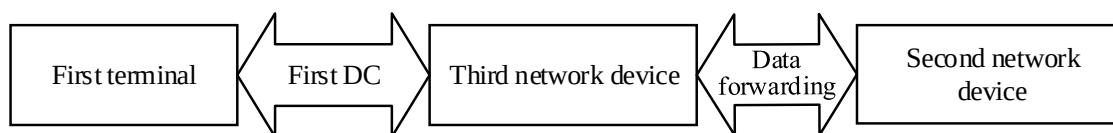


Fig. 2b

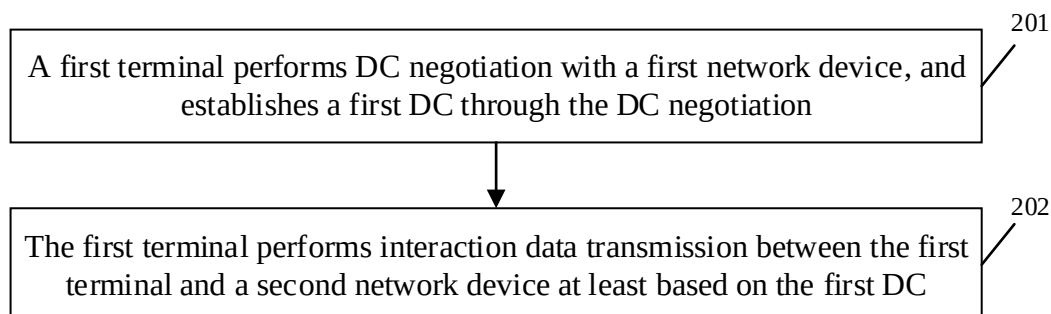


Fig. 3

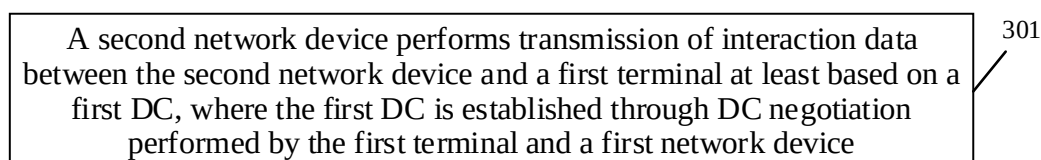


Fig. 4

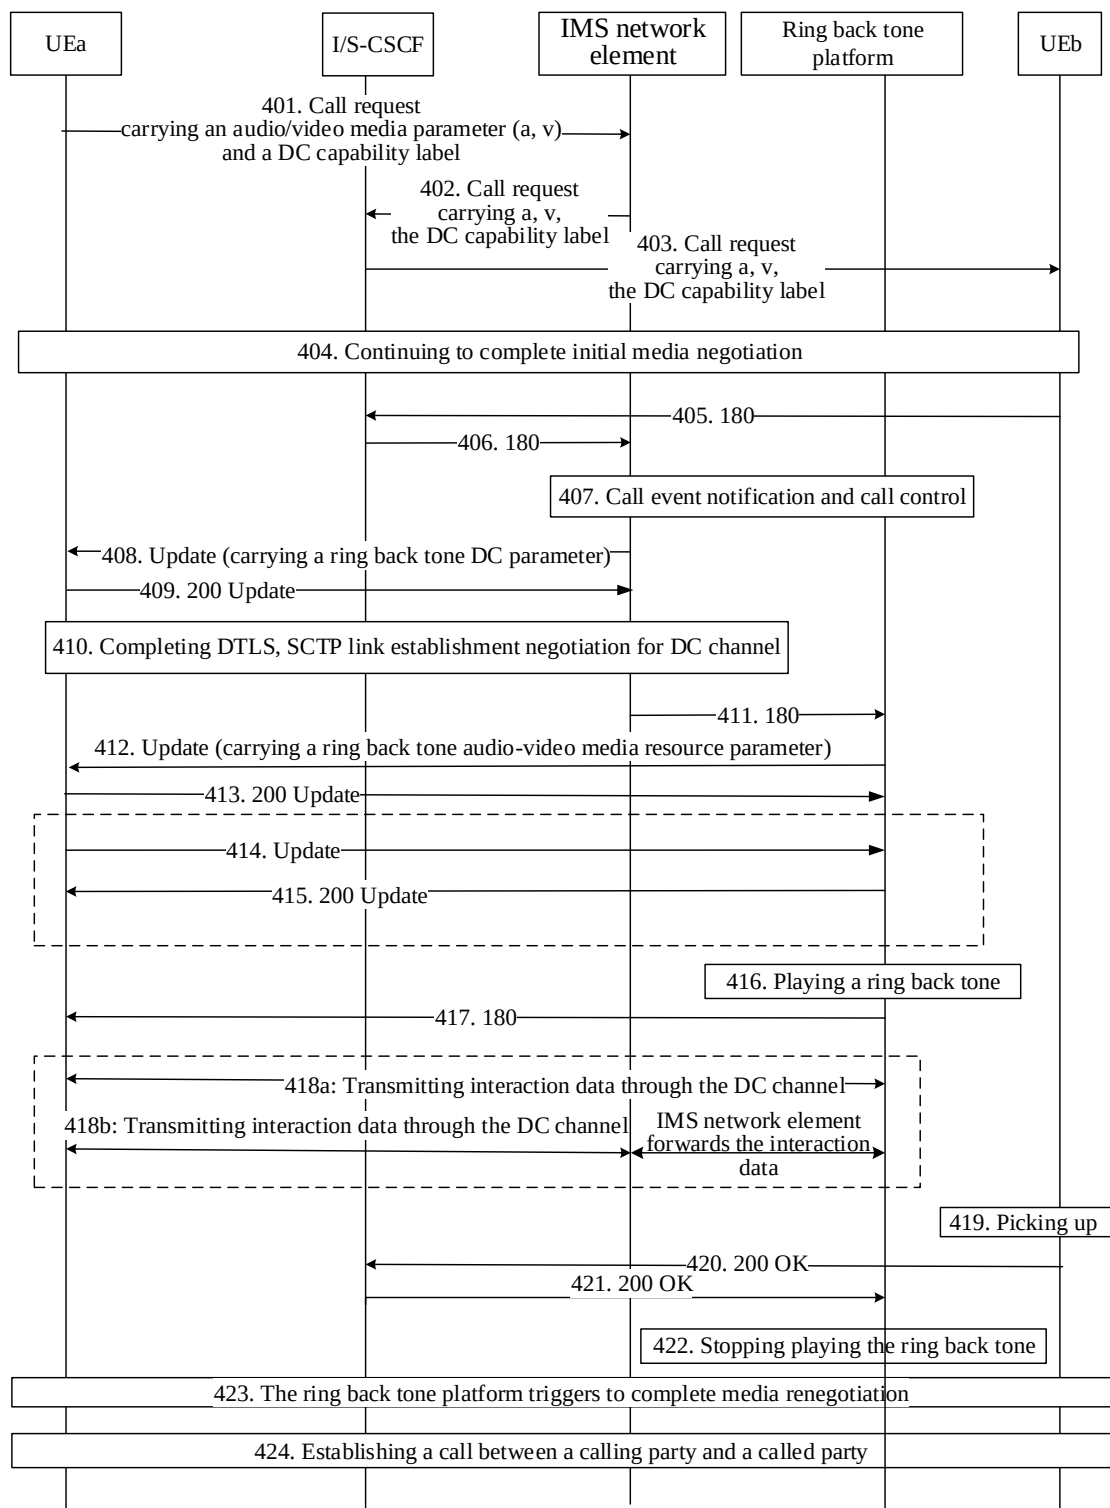


Fig. 5

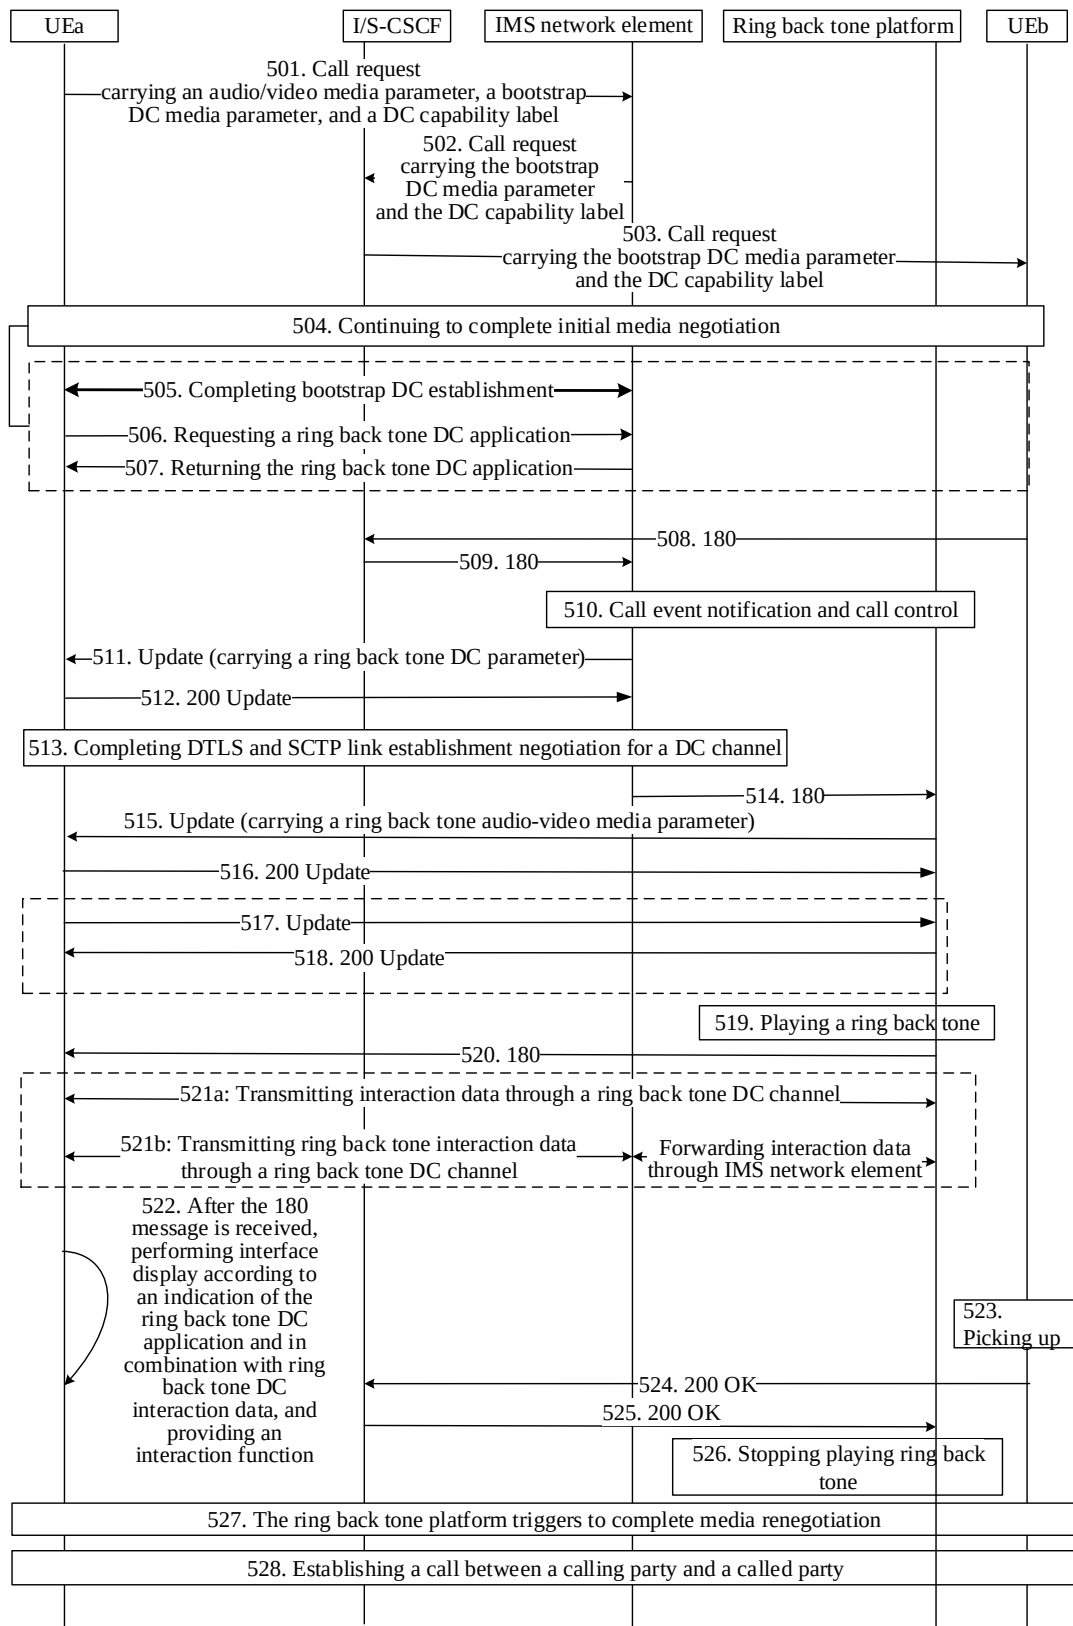


Fig. 6




Fig. 7

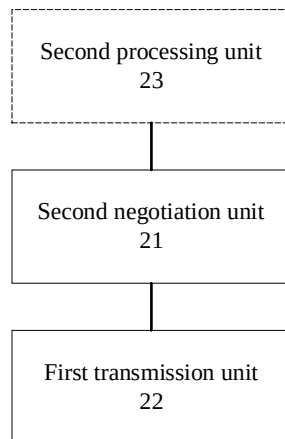


Fig. 8

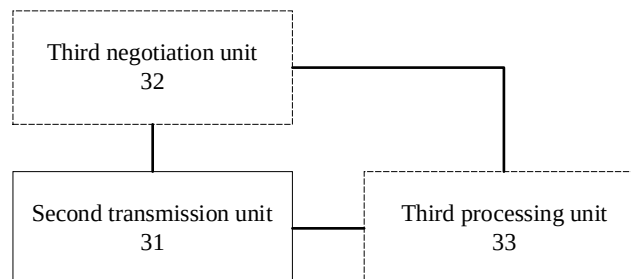


Fig. 9

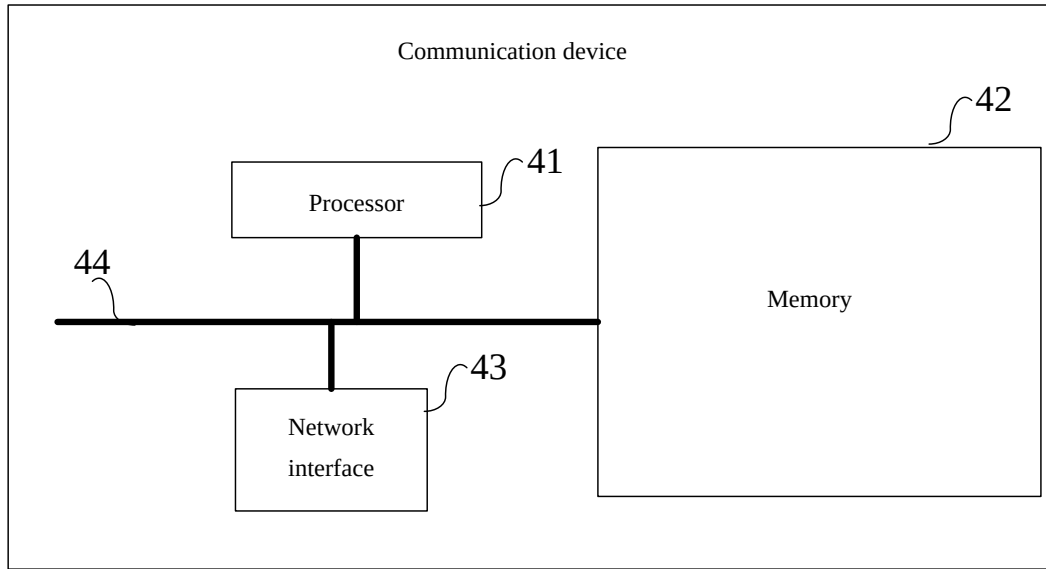


Fig. 10