

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
16 February 2006 (16.02.2006)

PCT

(10) International Publication Number
WO 2006/017380 A1

- (51) International Patent Classification : **H01R 12/08**,
12/38
- (21) International Application Number:
PCT/US2005/026943
- (22) International Filing Date: 29 July 2005 (29.07.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2004-231261 6 August 2004 (06.08.2004) JP
- (71) Applicant (for all designated States except US): **3M INNOVATIVE PROPERTIES COMPANY** [US/US];
3M Center, Post Office Box 33427, Saint Paul, Minnesota
55133-3427 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MATSUOKA, Hiroyuki** [JP/JP]; 33-1, Tamagawadai 2-chome, Seta-gaya-ku, Tokyo 158-8583 (JP).
- (74) Agents: **GOVER, Melanie G.**, et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COAXIAL CABLE GROUNDING STRUCTURE, CONNECTOR AND METHOD FOR CONNECTING CABLE IN SAID CONNECTOR

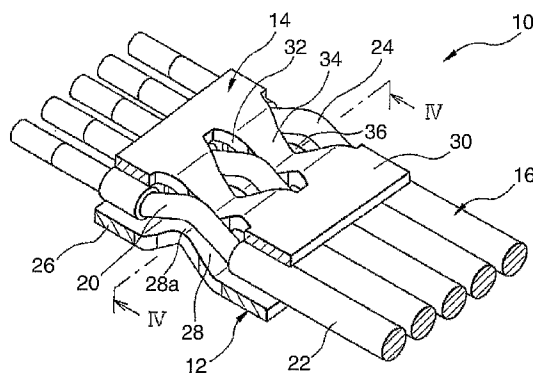

(57) Abstract: [Problem] A coaxial cable grounding structure using no solder exhibits a secure grounding function and a secure cable holding function in keeping with the reduction in the diameter of the cable core wire and the reduced interval between adjacent cables. [Solving Means] A coaxial cable grounding structure (10) comprises a conductive first member (12) and a conductive second member (14). The first member includes first bulges (28) in contact with outer conductors (20) of the exposed length (24) of a first group of coaxial cables (16), and the second member includes second openings (32) for receiving the first bulges and the cable exposed length supported by the first bulges. Further, the second member includes second bulges (34) in contact with the outer conductors of the exposed length of a second group of coaxial cables. The first member includes second bulges and first openings for receiving the cable exposed length supported by the second bulges. The exposed length of each coaxial cable is fixedly held by the friction force while being appropriately bent along the first and second bulges between the first bulges and the second openings one the one hand and between the first openings and the second bulges on the other hand.