



(43) International Publication Date
23 May 2013 (23.05.2013)

(51) International Patent Classification:

C25D 17/06 (2006.01) *B65G 17/32* (2006.01)
B65G 15/58 (2006.01) *B65G 49/04* (2006.01)

(21) International Application Number:

PCT/NL2012/050806

(22) International Filing Date:

15 November 2012 (15.11.2012)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

2007816 18 November 2011 (18.11.2011) NL

(71) Applicant: **MECO EQUIPMENT ENGINEERS B.V.**
[NL/NL]; Marconilaan 2, NL-5151 DR Drunen (NL).

(72) Inventor: **LOERMANS, Peter Jacobus Gerardus**; Gaf-
felstraat 12, NL-6617 CM Bergharen (NL).

(74) Agent: **ALGEMEEN OCTROOI- EN MERKENBUR-
EAU B.V.**; P.O. Box 645, NL-5600 AP Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: TRANSPORT MEMBER FOR TRANSPORTING STRIP-LIKE ELEMENTS TO BE TREATED IN A BATH

(57) Abstract: The present invention provides a transport member for transport-
ing strip-like elements to be treated in a bath. The transport member is provided
with a horizontally oriented endless carrier belt with resilient wire-like clamping
members attached thereto by means of their own resilience for the purpose of
clamping the strip-like elements at the position of wire ends of the clamping
members. Wire ends of adjacent clamping members are provided opposite each
other for clamping the strip-like elements therebetween.

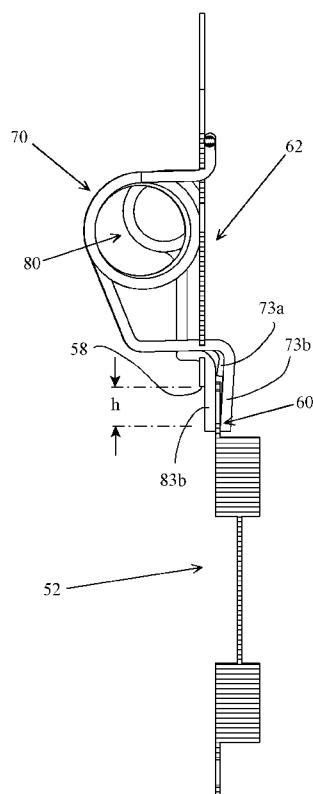


Fig 7



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, **Published:**

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, ML, MR, NE, SN, TD, TG).

— with international search report (Art. 21(3))