

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2011 年 2 月 24 日(24.02.2011)

PCT

(10) 国際公開番号
WO 2011/021440 A1


- (51) 国際特許分類:
F24F 1/00 (2006.01) F24F 13/22 (2006.01)
F24F 13/20 (2006.01)
- (21) 国際出願番号: PCT/JP2010/060949
- (22) 国際出願日: 2010 年 6 月 28 日(28.06.2010)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2009-189819 2009 年 8 月 19 日(19.08.2009) JP
- (71) 出願人 (米国を除く全ての指定国について):
シャープ株式会社 (Sharp Kabushiki Kaisha)
[JP/JP]; 〒5458522 大阪府大阪市阿倍野区長池町
2 番 2 号 Osaka (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 上原 雄二
(UEHARA, Yuhji) [JP/—]. 井谷 明広 (ITANI, Akihiro) [JP/—].
- (74) 代理人: 甲田 一幸 (KODA, kazuyuki); 〒5810038
大阪府八尾市若林町 1 丁目 8 番地の 2 八
尾南ガーデンテラス 208-B 号 Osaka (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保
護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA,
BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO,
CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS,
LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX,
MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL,
PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV,
SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保
護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW,
MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ
(AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT,
NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF,

[続葉有]

(54) Title: WALL-HUNG AIR CONDITIONER

(54) 発明の名称: 壁掛け形空気調和機

[図3]

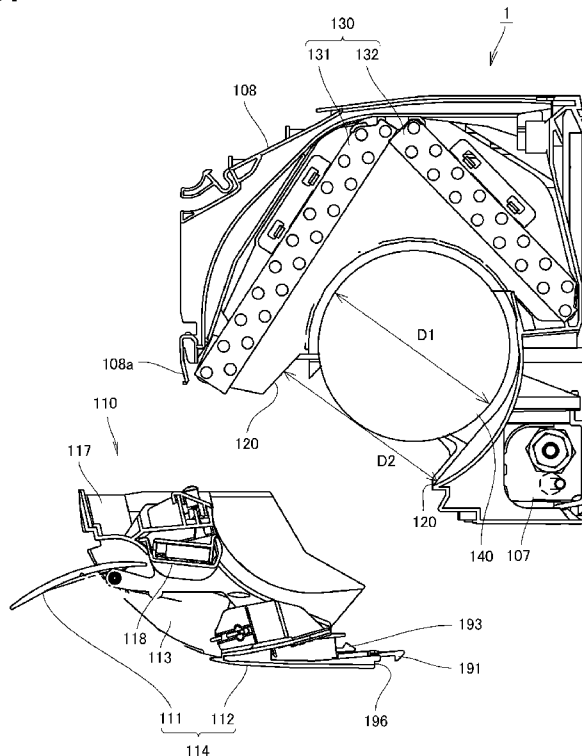

(57) Abstract: A wall-hung air conditioner configured in such a manner that a fan can be removed and attached irrespective of the shape of a heat exchanger and without moving the heat exchanger. A wall-hung air conditioner (1) is provided with a body (100) which contains a fan (140), and also with a drain pan assembly (110). The drain pan assembly (110) is provided with a blowing opening peripheral edge (114) which forms a blowing opening (113) for blowing air delivered by the fan (140), and also with a dew receiver (117), and the drain pan assembly (110) is removably mounted to the body (100). An opening (120) through which the fan (140) is removed from the body (100) is formed in the body (100). The drain pan assembly (110) is mounted to the body (100) in such a manner that the blowing opening (113) faces the opening (120) of the body (100). The blowing opening peripheral edge (114) includes an upper wall (118) which is disposed above the blowing opening (113), and also includes a blowing opening rear protrusion (112) which is disposed below the blowing opening (113).

(57) 要約:

[続葉有]