

TRIANGULATED ROOF STRUCTUREBackground of the Invention

This invention relates to a triangulated roof structure which supports a roof for an underlying building, arena or stadium. More particularly, it relates to a roof structure formed of a plurality of 5 tension members and compression members arranged in a triangulated manner for supporting a roof that projects in plan a closed non-circular curve.

In recent years, dome roofs have been constructed in a variety of manners. For example, some 10 dome roofs are constructed wherein the roof is supported only by rigid structural members forming the dome without the use of interior columns or beams. Such structures, however, exhibit high aspect ratios, that is, the ratio of surface area to delineated plan 15 area, in order to provide sufficiently low membrane stress. Other roof structures have been constructed wherein a lightweight membrane is supported by air pressure. These structures, while exhibiting low aspect ratios, suffer from numerous disadvantages. 20 The primary disadvantage involves the reliance on a mechanical device, such as a blower, for structural stability. A breakdown in such a mechanical device results in deflations, a common problem for air-supported roofs. In addition, these air-supported 25 roofs require an airtight underlying structure.

Other structures have been built using the principles of catenary suspension typically associated with the construction of suspension bridges. These structures often achieve the low aspect ratio of air- 30 supported roof structures without the detrimental reliance on mechanical devices for structural stability. For example, U.S. Patent No. 3,139,957 to Fuller illustrates structures in which a series of box frames of polygonal, cylindrical or other forms, of 35 progressively varying sizes are arranged in a



-2-

concentric array at sequentially different heights above a common plane of reference. These frames are also arranged in vertical overlapping spaced relation to one another to achieve incremental increases or
5 decreases in altitude. Tension elements in the form of flexible cables or wires extend between and are secured to adjacent pairs of box frames in the series, which suspend and anchor the box frames to one another.

Specifically, each frame includes upper chord
10 members and lower chord members which form polygons defining the upper and lower peripheries of the respective frames. Each frame also includes vertical compression columns which extend between the vertices of the polygon formed by the upper chord members and
15 the corresponding vertices of the polygon formed by the lower chord members. A first pair of tension members are supplied which extend downwardly, in a criss-crossing manner, from their point of securement at two adjacent upper vertices of a lower frame to two
20 corresponding adjacent lower vertices of an upper frame whereby successive frames in the series are suspended from one another. These tension members criss-cross when viewed in plan. A second pair of tension members are supplied which extend upwardly, in a criss-crossing
25 manner, from their points of securement at two adjacent lower vertices of the lower frame of the pair to two corresponding adjacent upper vertices of the upper frame in the pair, whereby successive frames in the series are anchored down to one another. These tension
30 elements also criss-cross when viewed in plan. Also, these two pairs of tension members, when viewed in elevation, also criss-cross.

In addition, two other pairs of tension members are supplied which are disposed in radial planes
35 containing the central axis of the structure. The

This Sheet Has Been Replaced



first pair of tension members extend downwardly from their point of securement at two adjacent upper vertices of the lower frame to two radially aligned lower vertices of an upper frame. The second pair of
5 tension members extend upwardly from their points of securement at two adjacent lower vertices of the lower frame to two radially aligned upper vertices of the upper frame. These two sets of tension members criss-cross when viewed in elevation.

10 The Fuller structures while applicable to a wide range of building shapes, are unnecessarily complicated. Fuller requires a plurality of criss-crossing cables, and consequently, requires complicated attachment structures to accommodate the number of
15 cables arriving at any particular attachment point. Also, due to the number of criss-crossing cables, which serve to suspend, anchor, buttress, resist torque, and resist counter-torquing of the frame, the Fuller structures are unduly redundant.

20 Further, although the roof structures described in the Fuller patent recognize the tremendous savings of constructing a building using the tensile strength of materials, the use of polygonal frames described in this reference and the number of tension
25 members used to interconnect the series of frames to one another, provide serious drawbacks. The most serious drawback involves the problems encountered when the disclosure of Fuller is applied to structures having a non-circular perimeter. In particular, due to
30 the concentric relation of the frames to one another, the angular relationship of anchoring cables and suspension cables to one another varies at successive frames and may also vary around the perimeter. Therefore, different attachment configurations must be
35 designed for all of the vertices of each of the frames.

This Sheet Has Been Replaced



This significantly increases fabrication costs and construction time.

Another example of a structure using catenary principles is the circular cable truss dome illustrated in U.S. Patent No. 4,736,553 to Geiger. This truss dome, which is not triangulated, is constructed from a plurality of radially oriented support members. The support members include, in a vertical plane, at least one upper tensioned member forming a top chord, at least one diagonal tensioned member which extends inwardly and downwardly from the upper tensioned member and at least one vertical rigid strut in compression, which is attached at its upper end to the upper tensioned member and attached at its lower end to the diagonal tensioned member. In this arrangement, the tensioned members form two adjacent sides of a triangle while the compression member forms the third side. At least one horizontal tensioned hoop concentric with the outer compression ring is also provided. The tensioned hoop is affixed to the lower end of the compression member.

The radially oriented support members are attached at an outer edge to a continuous compression ring which delineates the area to be covered by the dome. At an inner end, the support members are attached to a horizontal inner tension ring. A flexible membrane is placed on top of the support members to form a roof for the delineated area. In addition, a plurality of valley cables are positioned on top of the flexible membrane, between adjacent support members, which extend between the compression ring and the inner tension ring to maintain the flexible membrane in tension.

This structure, however, does not use triangulated construction. As a result, the structure

This Sheet Has Been Replaced



lacks a degree of lateral stability at the top radial chord of the dome and therefore relies on the flexible membrane for stiffness. Furthermore, due to the radial arrangement of the support members, this structure is
5 only appropriate for use in circular stadiums. Most stadiums or arenas are, however, non-circular.

Roof structures have been developed to support a roof for such non-circular buildings. For example, U.S. Patent No. 3,841,038 to Geiger relates to
10 a non-circular roof structure which defines an enclosed building space, including a ring which projects in plan substantially to a closed curve having major and minor axes and a plurality of skewed axes of symmetry. In this roof structure, a plurality of sets of rigid
15 arches are connected to the ring to form the roof, with the arches of at least two sets respectively extending in plan substantially parallel to a separate one of the skewed axes of symmetry of the closed curve, and the arches of another set extending in plan substantially
20 parallel to the major or minor axis of the closed curve. These arches impose a funicular load on the ring and support a roof deck structure to form a domed surface.

This structure, while applicable to non-
25 circular structures is unnecessarily complicated, requiring at some points the intersection of up to six arches. This causes extremely complicated attachments at these intersections. Also, this structure is constructed with rigid arches and, therefore, does not
30 efficiently use the tensile strength of building materials and may also result in a roof structure having a high aspect ratio.

Because of the drawbacks highlighted above, none of these prior art roof structures efficiently
35 utilize a triangulated arrangement of tension members



and compression members to construct a roof adaptable to a variety of non-circular underlying arenas.

Summary Of The Invention

5 I have devised a roof structure for a non-circular underlying building structure, such as a stadium, arena or the like, which overcomes the disadvantages and shortcomings of the above-mentioned prior art structures when such structures are applied
10 to non-circular stadiums. Specifically, I have devised a triangulated roof structure for a non-circular underlying structure which reduces the degree of complication of the joint details by approximating the shape of the underlying structure with a series of
15 circular arcs. This triangulated arrangement provides greater redundancy and is better able to handle the nonsymmetric loading conditions which such structures typically encounter.

In accordance with the present invention, a
20 triangulated cable arrangement is disclosed for supporting a roof that projects in plan a closed non-circular curve. The roof defines an enclosed area for an underlying building space having a non-circular perimeter including major and minor axes. The roof
25 structure includes an outer compression ring having a plan which substantially matches the perimeter of the underlying building. A non-circular curve is constructed on the compression ring, using a plurality of circular arcs, which closely approximates the non-
30 circular perimeter of the underlying building space.

The triangulated structure of the present invention also includes a plurality of hoop-like tension members which are concentrically arranged within the non-circular curve at different heights
35 relative to a common reference plane. A plurality of

This Sheet Has Been Replaced



-7-

vertical compression members or posts, having upper and lower ends, are affixed at their lower ends at spaced-apart locations on each of the hoop-like tension members. The upper and lower ends of the compression members define upper and lower attachment points or nodes, respectively. The compression members are located on each of these hoop-like tension members, such that each compression member located on a first hoop-like tension member and a proximal pair of compression members on an adjacent hoop-like tension member form, in projection on the plan, the vertices of a substantially isosceles triangle. Similarly, attachment points or nodes are located on the non-circular curve constructed on the outer compression ring such that each node located on the compression ring and a proximal pair of compression members located on an outermost hoop-like tension member also form, in plan, the vertices of a substantially isosceles triangle.

The structure further includes a plurality of tension elements interconnecting each compression member on a first hoop-like tension member to a proximal pair of compression members on an adjacent hoop-like tension member. Tension elements are also provided for interconnecting each compression member on the outermost hoop-like tension member to a proximal pair of nodes on the outer compression ring.

In this manner, the structure, when viewed in plan, appears as a plurality of substantially isosceles triangles arranged within the non-circular curve constructed on the compression ring. Accordingly, the structure is triangulated.

In accordance with another important aspect of the present invention, a tension member, such as a cable truss, is provided along the major axis of the

This Sheet Has Been Replaced

non-circular perimeter of the underlying structure. To complete the triangulated structure, the present invention also includes a plurality of tension elements for interconnecting compression members affixed to an innermost hoop-like tension member to the cable truss. A flexible membrane overlays the tension elements and is attached to the upper nodes of the compression members to form a roof for the underlying structure.

As described above, I have devised a triangulated roof structure for a non-circular underlying building structure in which the plan of the roof structure closely approximates the underlying building structure. In this manner, substantial economy in constructing the triangulated structure is achieved by reducing the variety of unique upper and lower node details that would otherwise occur at the interconnections of each compression member on a first hoop-like tension member to a proximal pair of compression members on an adjacent hoop-like tension member. Since the variety of unique node details is reduced, the same or similar node configurations can be used at a number of upper and lower ends of the compression members throughout the structure.

Brief Description Of The Drawings

These and other objects, features and advantages of my invention will be more readily apparent from the following detailed description of a preferred embodiment of the invention in which:

FIG. 1 is a side elevation view of a roof structure in accordance with one embodiment of the present invention;

FIG. 2 is a top plan view useful in understanding the present invention;

This Sheet Has Been Replaced



FIG. 3 is a top plan view depicting an upper set of tension elements used in a preferred embodiment of the invention;

FIG. 4 is a plan view similar to FIG. 3 depicting a set of diagonal tension elements and three hoop-like tension elements used in a preferred embodiment of the invention;

FIG. 5 is a view along the major axis of the non-circular curve in FIG. 3;

FIG. 6 is a view along the minor axis of the non-circular curve of FIG. 3;

FIG. 7 is a section taken through one node on the compression ring, at line 7-7 of FIG. 3;

FIG. 8 is a section taken through another node on the compression ring, at line 8-8 of FIG. 3;

FIG. 9 is a top plan view similar to FIG. 3 depicting an alternate compression ring comprising a triangular truss;

FIG. 10 is a section through lines 10-10 and 10'-10' of FIG. 9;

FIG. 11 is a top plan view of an upper node of a compression member;

FIG. 12 is a section through line 12-12 of FIG. 11;

FIG. 13 is a top plan view of a lower node of a compression member;

FIG. 14 is a section through line 14-14 of FIG. 13;

FIG. 15 is a top plan view depicting an alternate embodiment of the roof structure shown in FIGS. 3 and 4; and

FIG. 16 is a top plan view of another embodiment of the present invention.



Detailed Description Of The Preferred Embodiment

FIG. 1 illustrates, in side elevation view, a preferred embodiment of a triangulated roof structure, generally designated by the numeral 2, designed in accordance with my invention. Roof structure 2 defines an enclosed area for an underlying building space having a non-circular perimeter. Roof structure 2 includes a flexible membrane constructed from a plurality of diamond shaped panels, which provides a roof for the enclosed space. Cross-sections and plan views of this triangulated roof are shown in FIGS. 2-6.

FIG. 2 illustrates one non-circular configuration for which the present invention may be used, including a compression ring 10 having a non-circular plan which substantially matches the perimeter of an underlying building space 1 having major and minor axes. Constructed on compression ring 10 is a non-circular curve 12 which comprises a plurality of circular arcs. Non-circular curve 12 includes a first pair of circular arcs 20, 21 having their centers A, A' on the major axis of the non-circular curve formed by the perimeter of underlying building structure 1. Centers A, A' of circular arcs 20, 21 are equidistant from the minor axis and on opposite sides. Circular arcs 20, 21 form end sectors 22, 23 for the area enclosed by non-circular curve 12. Non-circular curve 12 further includes a second pair of circular arcs 30, 31 having centers B, B' located on the minor axis of the non-circular curve formed by the perimeter of underlying building structure 1. Centers B, B' of circular arcs 30, 31 are equidistant from the major axis and on opposite sides. Circular arcs 30, 31 form intermediate segments 32, 33. As shown in FIG. 2, first pair of circular arcs 20, 21 and second pair of circular arcs 30, 31 intersect to form non-circular

This Sheet Has Been Replaced



curve 12. Similarly, end sectors 22, 23 combine with intermediate segments 32, 33 to form the area enclosed by non-circular curve 12.

A plurality of hoop-like tension members 50 are concentrically arranged within non-circular curve 12 at different heights relative to a common plane. Vertical compression members 70, having upper and lower ends, are attached at their lower ends to each tension member 50 at spaced-apart locations 60 on the tension member. The upper ends of compression members 70 define upper attachment points or nodes 80 and the lower ends define lower attachment points or nodes 90. Compression members 70 are located on each hoop-like tension member 50 such that a compression member 70 on a first hoop-like tension member 50 and a proximal pair of compression members 70 on an adjacent hoop-like tension member 50 form, in plan, the vertices of a substantially isosceles triangle. Similarly, attachment points (or nodes) 40 are located on outer compression ring 10 such that a node 40 located on outer compression ring 10 and a proximal pair of compression members 70 on an outermost hoop-like tension member 50 form, in plan, the vertices of a substantially isosceles triangle.

Nodes 40 on compression ring 10, lying within end sectors 22, 23 are located at the intersections of non-circular curve 12 with alternating ones of a plurality of radial lines drawn in end sectors 22, 23 through centers A, A' of circular arcs 20, 21, respectively. Similarly, compression members 70 on hoop-like tension members 50, lying within end sectors 22, 23 are located at the intersections of alternating ones of hoop-like tension members 50, with alternating ones of the above-mentioned plurality of radial lines

This Sheet Has Been Replaced



drawn through centers A, A' of circular arcs 20, 21, respectively.

In similar fashion, nodes 40 on compression ring 10, lying within intermediate segments 32, 33 are located at the intersections of non-circular curve 12 with alternating ones of a plurality of radial lines drawn in intermediate segments 32, 33 through centers B, B' of circular arcs 30, 31, respectively. Compression members 70 on hoop-like tension members 50, lying within intermediate segments 32, 33 are located at the intersections of alternating ones of hoop-like tension members 50 with alternating ones of the above plurality of radial lines drawn through centers B, B' of circular arcs 30, 31. In this manner, the triangulated geometry of the present invention is adapted to a wide range of non-circular perimeters to accommodate an underlying structure.

One roof construction according to the present invention is shown in FIGS. 3 and 4, wherein compression ring 10, having an oval shape to match the perimeter of underlying building structure 1 rests upon a number of concrete support columns or other suitable foundation which may extend upward from underlying structure 1. Non-circular curve 12 is constructed on compression ring 10 as described above. A plurality of hoop-like tension members 50 are concentrically arranged within non-circular curve 12 on compression ring 10. As best seen in FIGS. 5 and 6, hoop-like tension members 50 are arranged within compression ring 10 at different heights relative to a common reference plane. A plurality of vertical compression members 70 are affixed at their lower ends to each of hoop-like tension members 50.

A plurality of tension elements are provided for interconnecting each compression member 70 affixed

This Sheet Has Been Replaced



to a first hoop-like tension member 50 to a proximal pair of compression members 70 affixed to an adjacent hoop-like tension member 50. Fig. 3 depicts, in plan, the triangulated arrangement of the tension elements
5 that run between the upper ends of the compression elements. Fig. 4 depicts, in plan, the hoop-like tension members 50 as well as the triangulated arrangement of diagonal tension elements that run between the upper end of one compression element and
10 the lower end of an adjacent compression element.

As best shown in FIGS. 3-6, these tension elements include: a first upper tension member 100 (Fig. 3) extending from upper node 80 of compression member 70 affixed to the first hoop-like tension member 50 to
15 upper node 80 of one of the proximal pair of compression members 70 affixed to the adjacent hoop-like tension member 50; a second upper tension member 101 (Fig. 3) extending from upper node 80 of compression member 70 affixed to the first hoop-like
20 tension member 50 to upper node 80 of the other one of the proximal pair of compression members 70 affixed to the adjacent hoop-like tension member 50; a first diagonal tension member 110 (Fig. 4) extending from upper node 80 of compression member 70 affixed to the
25 first hoop-like tension member 50 to lower node 90 of one of the proximal pair of compression members 70 affixed to adjacent hoop-like tension member 50; and a second diagonal tension member 111 (Fig. 4) extending from upper node 80 of compression member 70 affixed to
30 the first hoop-like tension member 50 to lower node 90 of the other one of the proximal pair of compression members 70 affixed to adjacent hoop-like tension member 50.

The triangulated structure of the present
35 invention also includes means for securing the



-14-

outermost hoop-like tension member 50 and compression members 70 attached thereto to compression ring 10. In the preferred embodiment, a plurality of tension elements interconnect each compression member 70
5 affixed to outermost hoop-like tension member 50 to a proximal pair of nodes 40 on compression ring 10.

Preferably, the plurality of tension elements include: a first upper tension member 102 (Fig. 3) extending outwardly from upper node 80 of compression
10 member 70 affixed to outermost hoop-like tension member 50 to one of the proximal pair of nodes 40 on compression ring 10; and second upper tension member 103 (Fig. 3) extending outwardly from upper node 80 of compression member 70 affixed to outermost hoop-like
15 tension member 50 to the other one of the proximal pair of nodes 40 on compression ring 10; a first diagonal tension member 112 (Fig. 4) extending outwardly from lower node 90 of compression member 70 affixed to outermost hoop-like tension member 50 to one of the
20 proximal pair of nodes 40 on compression ring 10; and a second diagonal member 113 (Fig. 4) extending outwardly from lower node 90 of compression member 70 affixed to outermost hoop-like tension member 50 to the other one of the proximal pair of nodes 40 on compression ring
25 10.

As shown in FIGS. 7 and 8, nodes 40 further include attachment members 42 for attaching upper tension members 102, 103 to compression ring 10 and attachment members 44 for attaching diagonal tension
30 members 112, 113 to compression ring 10. Attachment members 42, 44 are designed such that the intersection of the axial centerlines of all tension members attached to compression ring 10 coincide with nodes 40. In the preferred embodiment, compression ring 10
35 comprises a concrete box girder. Since nodes 40 lie on

This Sheet Has Been Replaced

non-circular curve 12 constructed on compression ring 10, the location of nodes 40 on compression ring 10 varies around non-circular curve 12. Accordingly, the location of attachment members 42, 44 also varies
5 around compression ring 10.

In an alternate embodiment, illustrated in FIGS. 9 and 10, compression ring 10 comprises triangular truss 210. Triangular truss 210 further includes horizontal top truss 212 and a pair of
10 inclined side trusses 214, 216 which are secured to top truss 212 and which extend downward from top truss 212 to a common point. The shape of triangular truss 210 varies around the perimeter of the underlying structure to accommodate the change in the location of nodes 40
15 relative to the underlying structure, due to the approximation of the perimeter by non-circular curve 12. Truss 210 in FIG. 10 illustrates the shape of the truss when node 40 lies inside a support column of underlying structure 1, such as at line 10-10 of FIG.
20 9. Truss 210' illustrates the shape of the truss when node 40 lies directly above a support column of underlying structure 1, such as at line 10'-10' of FIG. 9.

In the preferred embodiment, a cable truss
25 120, shown in FIG. 5, is positioned along the major axis between centers A, A' of circular arcs 20, 21 to incorporate a triangulated geometry into a non-circular configuration. Cable truss 120 preferably includes an upper tension member forming a top chord 122, a lower
30 tension member parallel to top chord 122 forming a bottom chord 124, a plurality of compression members 126 and 127, of varying heights, having upper and lower ends. The lower ends of compressions members 126, 127 are affixed to bottom chord 124. The upper ends of
35 compression members 126 are affixed to top chord 122,

This Sheet Has Been Replaced



while compression members 127 are affixed to top chord 122 at some point below their upper ends. Cable truss 120 also includes a plurality of diagonal tension members extending from the point at which a first
5 compression member 126, 127 is affixed to top chord 122 to the lower end of an adjacent compression member 126, 127, forming diagonal chords 128.

Also, a plurality of tension elements are provided for interconnecting an innermost hoop-like
10 tension member 50 to cable truss 120. In the preferred embodiment, these tension elements interconnect each compression member 70 affixed to innermost hoop-like tension member 50 to at least one compression member 126, 127 of cable truss 120. Preferably, as shown in
15 FIGS. 3 and 4, these tension elements include: at least one upper tension member 104 (Fig. 3) extending inwardly from upper node 80 of compression member 70 affixed to innermost hoop-like tension member 50 to the upper end of at least one compression member 126, 127
20 of cable truss 120 and at least one diagonal tension member 114 (Fig. 4) extending inwardly from upper node 80 of compression member 70 affixed to innermost hoop-like tension member 50 to the lower end of at least one compression member 126, 127 on cable truss 120.

25 In order to provide a roof which has an overall downward slope, an uppermost tension member 106 (Fig. 3) is positioned along the major axis between A, A', above cable truss 120 and is connected to the upper ends of compression members 127.

30 One particular advantage of the present invention is that the number of structural members in tension is maximized to more efficiently utilize the tensile property of the building materials. Therefore, the structural members that are in tension are
35 preferably formed of flexible materials such as cables.

This Sheet Has Been Replaced



For
tens
114
chor
5 cabl
pre
com
tow
mem
10 cab
ste
att
co
15 de
en
10
up
11
20 Up
p
m
o
s
25 1
P
c
P
s
30
35

-17-

For example, hoop-like tension members 50, upper tension members 100-106, diagonal tension members 110-114, top chord 122, bottom chord 124, and diagonal chord 128 of cable truss 120, preferably comprise cable such as wire strand, or wire rope. In the preferred embodiment, upper tension members 100-106 comprise a plurality of cables which may drop off toward the center of the structure. Compression members 70 as well as compression members 126, 127 of cable truss 120 are preferably rigid posts such as steel pipe.

FIGS. 11 and 12 illustrate an upper attachment 130 which may be affixed to the upper end of compression members 70. Upper attachment 130 is designed to attach to a compression member 70 first ends 100a, 101a of a first set of upper tension members 100, 101, second ends 100b, 101b of a second set of upper tension members 100, 101, and first ends 110a, 111a of a set of diagonal tension members 110, 111. Upper attachment 130 includes: a first attachment plate 131 for attaching the upper end of compression member 70; a pair of attachment plates 132, 133 located on an outer side of compression member 70 for attaching second ends 100b, 101b of upper tension members 100, 101, which extend inwardly from upper nodes 80 of a proximal pair of compression members 70 located on an outer adjacent hoop-like tension member 50; a second pair of attachment plates 134, 135 located on an inner side of compression member 70 for attaching first ends 100a, 101a of upper tension members 100, 101, which extend inwardly from upper node 80 of compression member 70 to upper nodes 80 of a proximal pair of compression members 70 located on an inner adjacent hoop-like tension member 50; a saddle-like plate 136 positioned above attachment plates 134, 135 and

This Sheet Has Been Replaced



conforming to the geometry therebetween for providing additional structural support to the attachment of upper tension members 100, 101; and a second attachment plate 137 for attaching first ends 110a, 111a of
5 diagonal tension members 110, 111, which extend inwardly from upper node 80 of compression member 70 to lower nodes 90 of a proximal pair of compression members 70 located on an inner adjacent hoop-like tension member 50. Significantly, upper attachment 130
10 is designed such that the intersection of the axial centerlines of all tension members 100, 101, 110, 111 and compression member 70 attached thereto coincide with upper node 80.

FIGS. 13 and 14 illustrate a lower attachment
15 140 which may be affixed to the lower end of compression member 70 and which in turn affixes the lower end of compression member 70 to hoop-like tension member 50 at nodes 60. Lower attachment 140 includes: a first plate 142 for attaching the lower end of
20 compression member 70; a second attachment plate 144 located on an outer side of compression member 70 for attaching the second ends 110b, 111b of diagonal tension members 110, 111, which extend inwardly from upper nodes 80 of a proximal pair of compression
25 members 70 located on an outer adjacent hoop-like tension member 50; and a third attachment plate 146 for securing the lower end of compression member 70 to hoop-like tension members 50. A plate 148, located beneath plate 146, may also be included to secure the
30 lower end of compression member 70 to hoop-like tension member 50. Lower attachment 140 is designed such that the axial centerlines of diagonal tension members 110, 111 and compression member 70 as well as the radial centerline of hoop-like tension member 50 attached
35 thereto coincide with lower node 90.



Overlying upper tension members 100-106 of the triangulated support structure is a flexible membrane 5 serving as a roof for the underlying structure. Membrane 5 may be formed by Teflon™-coated fiberglass, silicone coated polyester, or corrugated steel, although it is contemplated that other materials such as canvas may also be used. Preferably, however, membrane 5 is constructed of Teflon™-coated fiberglass.

In the preferred embodiment, membrane 5 comprises a plurality of diamond-shaped panels, such as panel abcd shown in FIG. 3. The vertices of these roof panels coincide with upper nodes 80 of compression members 70 and are secured to upper attachments 130. As such, these diamond shaped panels form hyperbolic paraboloids. This is best illustrated in FIG. 1. Significantly, the hyperbolic paraboloid shape the roof panels take when secured to upper nodes 80 of compression members 70 contributes to the structural stiffness of these panels, without the use of additional cables on top of membrane 5.

For convenience, a network of catwalks 150 can be constructed on hoop-like tension members 50 to provide for maintenance and installation personnel, as well as to provide mounting for service lighting, speakers and rigging for special events. Catwalks 150 may have handrails 152 on either side to provide safety.

The uniqueness of the cable truss structure designed in accordance with the present invention is best demonstrated by FIG. 1. In particular, the triangulated location of compression members 70 on hoop-like tension members 50 in an offset relation, gives rise to the unique hyperbolic paraboloid shape of the roof panels when attached to upper nodes 80 of compression members 70. The triangulated structure

This Sheet Has Been Replaced



-20-

provides an added degree of stability over prior art structures while minimizing the number of structural members required. Also of particular importance is the tent-like appearance of the overall structure, due primarily to the employment of cable truss 120 along the major axis.

FIG. 15 illustrates another non-circular configuration for which the present invention may be used, in which like elements are numbered in a like manner. This embodiment also includes a compression ring 218 having a non-circular plan which substantially matches the perimeter of the underlying building space. In this embodiment, however, a discontinuous non-circular curve 219 is constructed on compression ring 218 from a plurality of circular arcs, wherein each of the arcs has the same radius. Non-circular curve 219 includes a first pair of circular arcs 220, 221 having their centers on the major axis of the non-circular curve formed by the perimeter of the underlying building structure. The centers of circular arc 220, 221 are equidistant from the minor axis and on opposite sides. Non-circular curve 219 further includes a second pair of circular arcs 230, 231 having their centers located on the minor axis of the non-circular curve formed by the perimeter of the underlying building structure. The centers of circular arc 230, 231 are equidistant from the major axis and on opposite sides. First pair of circular arcs 220, 221 and second pair of circular arcs 230, 231 intersect to form discontinuous non-circular curve 219.

A plurality of hoop-like tension members 250 are concentrically arranged within non-circular curve 219 at different heights relative to a common plane. Nodes 240 are located at the intersections of the above-described circular curves which make up non-

This Sheet Has Been Replaced



circular curve 219. Additional nodes 240 are evenly spaced between the nodes located at these intersections. Vertical compression members 270 having upper and lower ends are attached at their lower ends to each hoop-like tension member 250 at spaced-apart locations 260 on the tension members. Compression members 270 are located on each hoop-like tension member 250 such that a compression member 270 on a first hoop-like tension member 250 and a proximal pair of compression members 270 on an adjacent hoop-like tension member 250 form, in plan, the vertices of a substantially isosceles triangle. Compression members 270 on an outermost hoop-like tension member 250 are located such that a node 240 located on outer compression ring 218 and a proximal pair of compression members 270 on the outer most hoop-like tension member 250 form, in plan, the vertices of a substantially isosceles triangle. A cable truss 320 is positioned along the major axis to complete the triangulated structure.

As described with respect to the embodiment shown in FIGS. 3 and 4, the structure includes upper and diagonal tension members 300, 301 and 310, 311, respectively, which interconnect each compression member 270 on a first hoop-like tension member 250 to the proximal pair of compression members 270 on an adjacent hoop-like tension member 250. Also, upper and diagonal tension members 302, 312 interconnect a compression member 270 located on outermost hoop-like tension member 250 to a proximal pair of nodes 240 on outer compression ring 218. Finally, tension elements are provided to interconnect compression members 270 on an inner most hoop-like tension member 250 to cable truss 320.

35

This Sheet Has Been Replaced

In this embodiment, all of the upper attachments on any one hoop-like tension member 250 are identical since the angular relation of tension members arriving at an upper node are identical for each
5 compression member on the hoop. Similarly, all of the lower attachments are identical. Only the upper and lower attachments for compression members lying along lines 340 are different for each hoop.

FIG. 16 illustrates another non-circular
10 configuration for which the present invention may be used, where like elements are designated by like numerals. This embodiment is drawn specifically to an underlying structure having a substantially triangular perimeter. A compression ring 410 is provided having a
15 plan which substantially matches the triangular perimeter of the underlying building space. In this embodiment, a discontinuous non-circular curve 412 is constructed from three circular arcs having the same radius. The centers of these arcs are located on
20 meridians 420 which are drawn from each vertex of the triangle to a middle point of the opposite side of the triangle. In this manner, non-circular curve 412 is constructed which substantially matches the perimeter of the underlying building space.

25 Nodes 440 are located at each vertex of the triangle and additional nodes 440 are evenly spaced along non-circular curve 412 between each vertex. A plurality of hoop-like tension members 450 are concentrically arranged within non-circular curve 412
30 at different heights relative to a common plane. Vertical compression members 470 are attached at their lower ends to each hoop-like tension member at spaced-apart locations 460 on the tension members such that a compression member 470 on a first hoop-like tension
35 member 450 and a proximal pair of compression members



470 on an adjacent hoop-like tension member 450 form, in plan, the vertices of a substantially isosceles triangle.

Upper and diagonal tension members 500, 501 and 510, 511, respectively, are provided which interconnect compression member 470 on the first hoop-like tension member 450 to the proximal pair of compression members 470 located on the adjacent hoop-like tension member 450. Also, upper and diagonal tension members are provided which interconnect each compression member 470 on an outermost hoop-like tension member 450 to at least one node 440 on outer compression member 410.

In addition, a tension element 520, such as a post, is provided at a center point of the triangle. Tension elements are also provided which interconnect each compression member 470 on an innermost hoop-like tension member 450 to inner tension element 520. In this manner, a triangulated structure is achieved wherein the upper and lower attachments along each hoop-like tension member are the same.

While the drawings illustrate a roof structure for a non-circular underlying structure, it is apparent that the triangulated cable arrangement disclosed in the present invention is also applicable to circular stadiums or arenas. In the case of a circular stadium or arena, a single tension member, such as an inner hoop-like tension member or single post, is employed at the center of the circle. As previously described with respect to a non-circular configuration, compression members on circular tension hoops and nodes on a circular compression ring are located at the intersections of alternating ones of a plurality of radial lines drawn through the center of the circle with alternating ones of the tension hoops



and a circular curve constructed on the compression ring. Compression members define upper and lower nodes as described before, and upper tension members as well as diagonal tension members interconnect each
5 compression member on a first tension hoop to a proximal pair of compression members on an adjacent tension hoop. In this manner, a triangulated circular roof structure is constructed.

In a similar manner, an eye-shaped roof
10 structure may also be constructed. In this case, a pair of circular arcs, each having a center located on the minor axis, equidistant from the major axis and on opposite sides, intersect to form a discontinuous eye-shaped curve which approximates the perimeter of the
15 underlying structure. A tension member, such as a cable truss, is positioned along the major axis and a plurality of tension hoops are concentrically arranged within the eye-shaped curve.

Nodes are located on a compression ring at
20 the intersections of the two circular arcs. Additional nodes are evenly spaced along the eye-shaped curve between the nodes located at these intersections. Compression members are located on the tension hoops such that a compression member on a first tension hoop
25 and a proximal pair of compression members on an adjacent hoop form, in plan, the vertices of a substantially isosceles triangle. Also, compression members on an outermost tension hoop are located such that a compression member on the outermost tension hoop
30 and a proximal pair of nodes on the compression ring form, in plan, the vertices of a substantially isosceles triangle. A plurality of tension elements interconnect each compression member on a first tension hoop to the proximal pair of compression members on an
35 adjacent hoop. Finally, a plurality of tension



elements interconnect each compression member on the outermost hoop to the proximal pair of nodes on the compression ring.

As is apparent from the description above, the present invention is well-suited for adapting triangulated structure to a wide variety of non-circular and circular configurations. By using at least one circular arc to approximate the configuration of the underlying structure, an efficient cable arrangement is derived. By approximating an underlying non-circular configuration with a plurality of circular arcs, the triangulated geometry disclosed in the present invention may be used for a wide variety of shapes while reducing the variety of cable attachment geometries and increasing the number of attachments in which the geometry of cables arriving thereat is the same. This allows for the use of one upper attachment to be used at a plurality of upper nodes as well as one lower attachment to be used at a plurality of lower nodes.

While the invention has been described in conjunction with specific embodiments, it is evident that numerous alternatives, modifications, and variations will be apparent to those skilled in the art in light of the foregoing description.

This Sheet Has Been Replaced



Claims

What is claimed is:

1. A triangulated structure for supporting
5 a roof that projects in plan a substantially closed
oval curve having major and minor axes, comprising:
a substantially horizontal outer compression
ring;
a substantially planar cable truss positioned
10 along the major axis of the oval;
a plurality of oval tension hoops
concentrically arranged within said compression ring at
different heights relative to a common reference plane;
a plurality of substantially vertical
15 compression members having upper and lower ends,
defining upper and lower nodes, affixed at their lower
ends to one of said oval tension hoops, wherein
compression members affixed to a first tension hoop are
not radially aligned with compression members affixed
20 to an adjacent tension hoop;
a plurality of tension elements
interconnecting a compression member affixed to the
first tension hoop to a proximal pair of compression
members affixed to an adjacent tension hoop, said
25 tension elements including:
a first upper tension member
extending from the upper node of
said compression member affixed to
said first tension hoop to the
30 upper node of one of said proximal
compression members affixed to said
adjacent tension hoop;
a second upper tension member
extending from said upper node of
35 said compression member affixed to



This Sheet Has Been Replaced



said first tension hoop to the upper node of the other one of said proximal compression members affixed to said adjacent tension hoop;

5

a first diagonal tension member extending from said upper node of said compression member affixed to said first tension hoop to the lower node of one of said proximal compression members affixed to said adjacent tension hoop; and

10

a second diagonal tension member extending from said upper node of said compression member affixed to said first tension hoop to the lower node of the other one of said proximal compression members affixed to said adjacent tension hoop;

15

20

means for securing an outermost tension hoop and the vertical compression members attached thereto to said compression ring; and

25

means for securing an innermost tension hoop to said cable truss.


2. The triangulated structure of claim 1 wherein said substantially closed oval curve comprises at least two circular arcs.

30

3. The triangulated structure of claim 2 wherein said substantially closed oval curve comprises four circular arcs.

35



This Sheet Has Been Replaced


4. The triangulated structure of claim 3 wherein the area enclosed by the substantially closed oval curve comprises:

first and second end sectors formed by first and second circular arcs, the centers of which lie on the major axis of said oval curve, equidistant from the minor axis and on opposite sides thereof; and

first and second intermediate segments formed by first and second intermediate circular arcs, the centers of which are located on the minor axis of said oval curve, at a predetermined distance from said major axis on opposite side thereof.

5. The triangulated structure of claim 4 wherein compression members located in said first end sector are affixed to said tension hoops at positions defined by the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said first circular arc; and

wherein compression members located in said second end sector are affixed to said tension hoops at positions defined by the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said second circular arc.

6. The triangulated structure of claim 5 wherein compression members located in said first intermediate segment are affixed to said tension hoops at positions defined by the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said first intermediate arc; and

This Sheet Has Been Replaced



* C L M S *

wherein compression members located in said second intermediate segment are affixed to said tension hoops at positions defined by the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said second intermediate arc.

7. The triangulated structure of claim 1 wherein said compression ring comprises a plurality of nodes forming a substantially closed oval curve concentric to said outermost tension hoop.

8. The triangulated structure of claim 7 wherein said means for securing said outermost tension hoop and the vertical compression members attached thereto to said compression ring comprises a plurality of tension elements interconnecting a compression member affixed to said outermost tension hoop to a proximal pair of nodes on said compression ring.

9. The triangulated structure of claim 8 wherein said plurality of tension elements comprise:
a first upper tension member extending outwardly from the upper node of said compression member affixed to said outermost tension hoop to one of said proximal nodes on said compression ring;

a second upper tension member extending outwardly from said upper node of said compression member affixed to said outermost tension hoop to the other one of said proximal nodes on said compression ring;

a first diagonal tension member extending outwardly from the lower node of said compression member affixed to said outermost tension hoop to one of said proximal nodes on said compression ring; and

This Sheet Has Been Replaced



-30-

a second diagonal tension member extending outwardly from said lower node of said compression member affixed to said outermost tension hoop to the other one of said proximal nodes on said compression
5 ring.

10. The triangulated structure of claim 7 wherein said compression ring comprises a concrete box girder.

10

11. The triangulated structure of claim 10 wherein the location of said nodes relative to the cross-section of said girder varies around the perimeter of said compression ring.

15

12. The triangulated structure of claim 7 wherein said compression ring comprises a triangular truss having a horizontal top truss and a pair of inclined side trusses secured to said top truss, which
20 extend downward from said top truss to a common point.

13. The triangulated structure of claim 1 wherein the number of compression members on each tension hoop is the same.

25

14. The triangulated structure of claim 1 wherein said tension elements comprise a plurality of cables.

30

15. The triangulated structure of claim 14 wherein each of said upper tension members comprise wire rope.

35

This Sheet Has Been Replaced



* C L N S *

16. The triangulated structure of claim 14 wherein each of said diagonal tension members comprise wire strand.

5 17. The triangulated structure of claim 4 wherein said cable truss comprises:
an upper tension member forming a top chord;
a lower tension member parallel to said top chord, forming a bottom chord;
10 a plurality of compression members of varying heights which are affixed to said top and bottom chords; and
a plurality of diagonal tension members extending from said top chord to said bottom chord
15 between adjacent compression members, forming diagonal chords.

18. The triangulated structure of claim 17 wherein each of said upper, lower and diagonal tension
20 members comprise wire strand.

19. The triangulated structure of claim 17 wherein each of said upper, lower and diagonal tension
members comprise wire rope.
25

20. The triangulated structure of claim 17 wherein said top chord, bottom chord, diagonal chord and compression members all lie in a vertical plane.

30 21. The triangulated structure of claim 20 wherein said cable truss has first and second ends which coincide with the centers of said first and second circular arcs, respectively.

35

This Sheet Has Been Replaced



22. The triangulated structure of claim 21 wherein said first and second ends of said cable truss comprise compression members.

5 23. The triangulated structure of claim 22 wherein said means for securing said innermost tension hoop to said cable truss comprises a plurality of tension elements interconnecting a compression member affixed to said innermost tension hoop to at least one
10 compression member of said cable truss.

24. The triangulated structure of claim 1 wherein said oval tension hoops comprise a plurality of cables.

15

25. The triangulated structure of claim 24 wherein each of said tension hoops comprise a plurality of wire strands.

20 26. The triangulated structure of claim 24 wherein each of said tension hoops comprise a plurality of wire ropes.

27. The triangulated structure of claim 1
25 further including a flexible membrane overlying said structure.

28. The triangulated structure of claim 27 wherein said flexible membrane is selected from
30 Teflon™-coated fiberglass, silicon coated polyester and corrugated steel.

29. The triangulated structure of claim 27 wherein said membrane comprises a plurality of diamond
35 shaped panels, the vertexes of which coincide with the

This Sheet Has Been Replaced



upper nodes of the substantially vertical compression members.

30. The triangulated structure of claim 29
5 wherein each of said diamond shaped panels forms a hyperbolic paraboloid when secured to said upper nodes of said vertical compression members.

31. A triangulated cable arrangement for
10 supporting a roof comprising:
an inner tension member;
a plurality of substantially horizontal tension hoops concentrically arranged about said inner tension member at different heights relative to a
15 common reference plane;
a plurality of substantially vertical compression members having an upper end and a lower end, defining upper and lower nodes, affixed at their lower ends to one of said tension hoops, wherein
20 compression members affixed to a first hoop are not radially aligned with compression members affixed to an adjacent tension hoop;
a plurality of tension elements interconnecting a first compression member affixed to
25 said first tension hoop to a proximal pair of compression members affixed to said adjacent tension hoop, said tension elements including:
a pair of upper tension members extending from the upper
30 node of said compression member affixed to said first tension hoop to the upper nodes of each of said proximal pair of compression members affixed to said adjacent
35 tension hoop; and

This Sheet Has Been Replaced



5 a pair of diagonal tension members extending from said upper node of said compression member affixed to said first tension hoop to the lower nodes of each of said proximal pair of compression members affixed to said adjacent tension hoop;

10 means for securing an innermost tension hoop and the compression members attached thereto to said inner tension member; and

means for securing an outermost tension hoop to a support structure.

15 32. The triangulated cable arrangement of claim 31 wherein said means for securing said innermost tension hoop to said inner tension member comprises a plurality of tension elements interconnecting compression members affixed to said innermost tension

20 hoop to said inner tension member.


25 33. The triangulated cable arrangement of claim 32 wherein the roof projects in a plan a substantially closed circular curve.

34. The triangulated cable arrangement of claim 33 wherein compression members affixed to every other tension hoop are radially aligned.

30 35. A support structure for anchoring cables of a triangulated structure which supports a roof projecting in plan a substantially closed oval curve, to an underlying structure having a non-circular perimeter comprising:

35

This Sheet Has Been Replaced



a compression beam having a plan corresponding to the non-circular perimeter of the underlying structure; and

5 a plurality of nodes forming in plan a substantially closed oval curve concentric to the substantially closed oval curve of the roof.

36. The support structure of claim 35 wherein said nodes lie along a closed oval curve
10 defined by first and second circular arcs, the centers of which lie on a major axis of the noncircular perimeter of the underlying structure, equidistant from a minor axis and on opposite sides thereof; and first and second intermediate circular arcs, the centers of
15 which are located on the minor axis of the noncircular perimeter of the underlying structure, equidistant from the major axis and on opposite sides thereof.

37. The support structure of claim 36
20 wherein nodes are located at positions defined by the intersections of said oval curve with a plurality of radial lines drawn through the centers of said first and second circular arcs and said first and second intermediate arcs.

25 38. The support structure of claim 37 wherein the location of said attachment points relative to the cross-section of said compression beam varies around the perimeter of said support structure.

30 39. The support structure of claim 38 wherein said compression ring comprises a concrete box girder.

35

This Sheet Has Been Replaced



* C L M S *

-36-

40. The support structure of claim 38 wherein said compression beam comprises a triangular truss having a horizontal top truss and a pair of inclined side trusses secured to said top truss, which
5 extend downward from said top truss to a common point.

41. In a structure for supporting a roof, of the type having a plurality of tension hoops concentrically arranged at different heights relative
10 to a common reference plane, a plurality of substantially vertical compression members having upper and lower ends, affixed at their lower ends to one of said tension hoops, at least one upper tension member
15 extending from the upper end of each compression member affixed to a first tension hoop to the upper end of at least one compression member affixed to an adjacent tension hoop and at least one diagonal tension member
20 extending from the upper end of each compression member affixed to said first tension hoop to the lower end of at least one compression member affixed to said adjacent tension hoop, tension member attaching means comprising:

upper attachment means coupled to the upper end of said substantially vertical compression members
25 for attaching at least one upper tension member and at least one diagonal tension member to the upper end of said compression members; and

lower attachment means coupled to the lower end of said substantially vertical compression members
30 for attaching at least one diagonal tension member to the lower end of said compression members and for affixing the lower end of said compression members to one of said tension hoops.

35

This Sheet Has Been Replaced



42. The attaching means of claim 41 wherein said upper attachment means are configured to attach at least one upper tension member and at least one diagonal tension member to the upper end of said compression member such that the axial centerlines of
5 said at least one upper tension member and said at least one diagonal tension member intersect at a predetermined point lying on the axial centerline of said compression member.

10 43. The attaching means of claim 41 wherein said lower attachment means are configured to attach at least one diagonal tension member to the lower end of said compression member such that the axial centerline
15 of said at least one diagonal tension member and the radial centerline of said tension hoop intersect at a predetermined point lying on the axial centerline of said compression member.

20 44. A triangulated structure for supporting a roof that projects in plan a closed non-circular curve, defining an enclosed area for an underlying building space having a non-circular perimeter, including major and minor axes, comprising:

25 a substantially horizontal outer compression member having a plan substantially matching the perimeter of the underlying building space;

a plurality of nodes located about the perimeter of said compression member defining a
30 substantially closed non-circular curve closely approximating the non-circular perimeter of the building space, said curve comprising:

first and second circular
arcs, the centers of which are
35 located at predetermined points on

This Sheet Has Been Replaced



* C L M S *


-38-

the major axis of the non-circular building perimeter, equidistant from the minor axis and on opposite sides thereof; and

- 5 first and second intermediate circular arcs, having a larger radius than said first and second circular arcs, the centers of which are located at predetermined points
- 10 on the minor axis of the non-circular building perimeter, equidistant from the major axis and on opposite sides thereof;
- a plurality of hoop-like tension members
- 15 concentrically arranged within said non-circular curve at different heights relative to a common reference plane;
- a plurality of substantially vertical compression members located on each of said hoop-like
- 20 tension members, wherein compression members located on a first tension member and a proximal pair of compression members on an adjacent tension member form, in plan, the vertices of a substantially isosceles triangle;
- 25 a plurality of tension elements interconnecting each compression member on said first tension member to said proximal pair of compression members on said adjacent member; and
- means for interconnecting compression members
- 30 on an outermost hoop-like tension member to said nodes on said outer compression member.

45. The triangulated roof of claim 44 wherein said first and second circular arcs define
- 35 first and second end sectors, and wherein said first

This Sheet Has Been Replaced



and second intermediate circular arcs define first and second intermediate segments.

46. The triangulated roof structure of claim
5 45 wherein compression members in said first end sector
are located at the intersections of alternating ones of
said tension hoops with alternating ones of a plurality
of radial lines drawn through the center of said first
circular arc; and

10 wherein compression members in said second
end sector are located at the intersections of
alternating ones of said tension hoops with alternating
ones of a plurality of radial lines drawn through the
center of said second circular arc.

15 47. The triangulated roof structure of claim
46 wherein compression member in said first
intermediate segment are located at the intersections
of alternating one of said tension hoops with
20 alternating ones of a plurality of radial lines drawn
through the center of said first intermediate arc; and

wherein compression members in said second
intermediate segment are located at the intersections
of alternating one of said tension hoops with
25 alternating ones of a plurality of radial lines drawn
through the center of said second intermediate arc.

48. The triangulated roof structure of claim
44 further comprising a substantially planar cable
30 truss positioned along the major axis of the non-
circular perimeter of the building space, which extends
from the center of said first circular arc to the
center of said second circular arc.

35

This Sheet Has Been Replaced



* C L N S *

49. A triangulated structure for supporting a roof that projects in plan a closed non-circular curve, defining an enclosed area for an underlying building space having a non-circular perimeter having
5 major and minor axes, comprising:

an outer compression member having a plan substantially matching the perimeter of the underlying building space;

a substantially closed non-circular curve,
10 constructed on said compression member, closely approximating the non-circular perimeter of the underlying building space, including:

a first pair of circular arcs having their centers on the major axis, equidistant from the minor axis and on opposite sides
15 thereof, forming end sectors; and

a second pair of circular arcs having their centers on the minor axis, equidistant from the major axis and on opposite sides
20 thereof, forming intermediate segments, wherein said first and second pairs of circular arcs intersect to form said non-circular curve;

a plurality of hoop-like tension members
25 concentrically arranged within said non-circular curve at different heights relative to a common reference plane;

a plurality of substantially vertical compression members located on each of said hoop-like
30 tension members, wherein compression members located on a first hoop-like tension member and a proximal pair of compression members on an adjacent tension member form, in plan, the vertices of substantially isosceles triangles;

35



This Sheet Has Been Replaced



a plurality of nodes located on said outer compression member wherein said nodes located on said outer compression member and a proximal pair of compression members on an outermost hoop-like tension member form, in plan, the vertices of substantially isosceles triangles;

a plurality of tension elements interconnecting each compression member on said first hoop-like tension member to said proximal pair of compression members on said adjacent hoop-like member; and

means for interconnecting compression members on said outermost hoop-like tension member to said proximal pair of nodes on said compression member.

15

50. The triangulated structure of claim 49 wherein said non-circular curve is discontinuous.

51. The triangulated structure of claim 50 wherein the radius of said first and second pair of circular arcs is the same.

52. The triangulated structure of claim 49 wherein said non-circular curve is continuous.

25

53. A triangulated cable arrangement for supporting a roof comprising:

an inner tension member;

a plurality of substantially horizontal tension hoops concentrically arranged about said inner tension member at different heights relative to a common reference plane;

a plurality of substantially vertical compression members having upper and lower ends, defining upper and lower nodes, affixed at their lower

30
35

This Sheet Has Been Replaced



* C L M S *

ends to one of said tension hoops, wherein each
compression member located on a first tension hoop and
a proximal pair of compression members on an adjacent
tension hoop form, in plan, the vertices of a
5 substantially isosceles triangle;

a plurality of tension elements
interconnecting a first compression member affixed to
said first tension hoop to said proximal pair of
compression members affixed to said adjacent tension
10 hoop, said tension elements including:

a pair of upper tension
members extending from the upper
node of said compression member
affixed to said first tension hoop
15 to the upper nodes of each of said
proximal pair of compression
members affixed to said adjacent
tension hoop; and

a pair of diagonal tension
20 members extending from said upper
node of said compression member
affixed to said first tension hoop
to the lower nodes of each of said
proximal pair of compression
25 members affixed to said adjacent
tension hoop;

means for securing an innermost tension hoop
and the compression members attached thereto to said
inner tension member;

30 an outer compression member;
a plurality of nodes located on said outer
compression member; and

a plurality of tension elements
interconnecting an outermost tension hoop and the
35



This Sheet Has Been Replaced



compression members attached thereto to said nodes on said outer compression member.

54. The triangulated cable arrangement of
5 claim 53 wherein the roof projects in plan a substantially closed triangle.

55. The triangulated cable arrangement of
claim 54 wherein said nodes on said outer compression
10 member are located on a substantially closed, discontinuous triangular curve comprising three circular arcs.

56. The triangulated cable arrangement of
15 claim 55 wherein the centers of said circular arcs are located on meridians joining each vertex of said triangular curve with a middle point of the opposite side of said triangle.

20 57. The triangulated cable arrangement of claim 56 wherein nodes are located at each vertex of said triangle.

58. The triangulated cable arrangement of
25 claim 57 wherein nodes on said outer compression member are evenly spaced.

30

35

This Sheet Has Been Replaced

* C L M S *

1/14

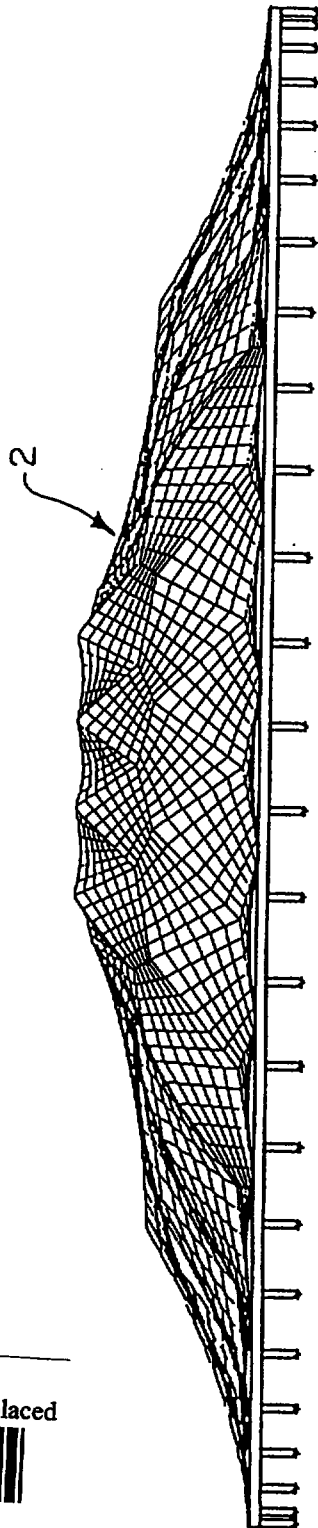


FIG. 1

This Sheet Has Been Replaced



SUBSTITUTE SHEET

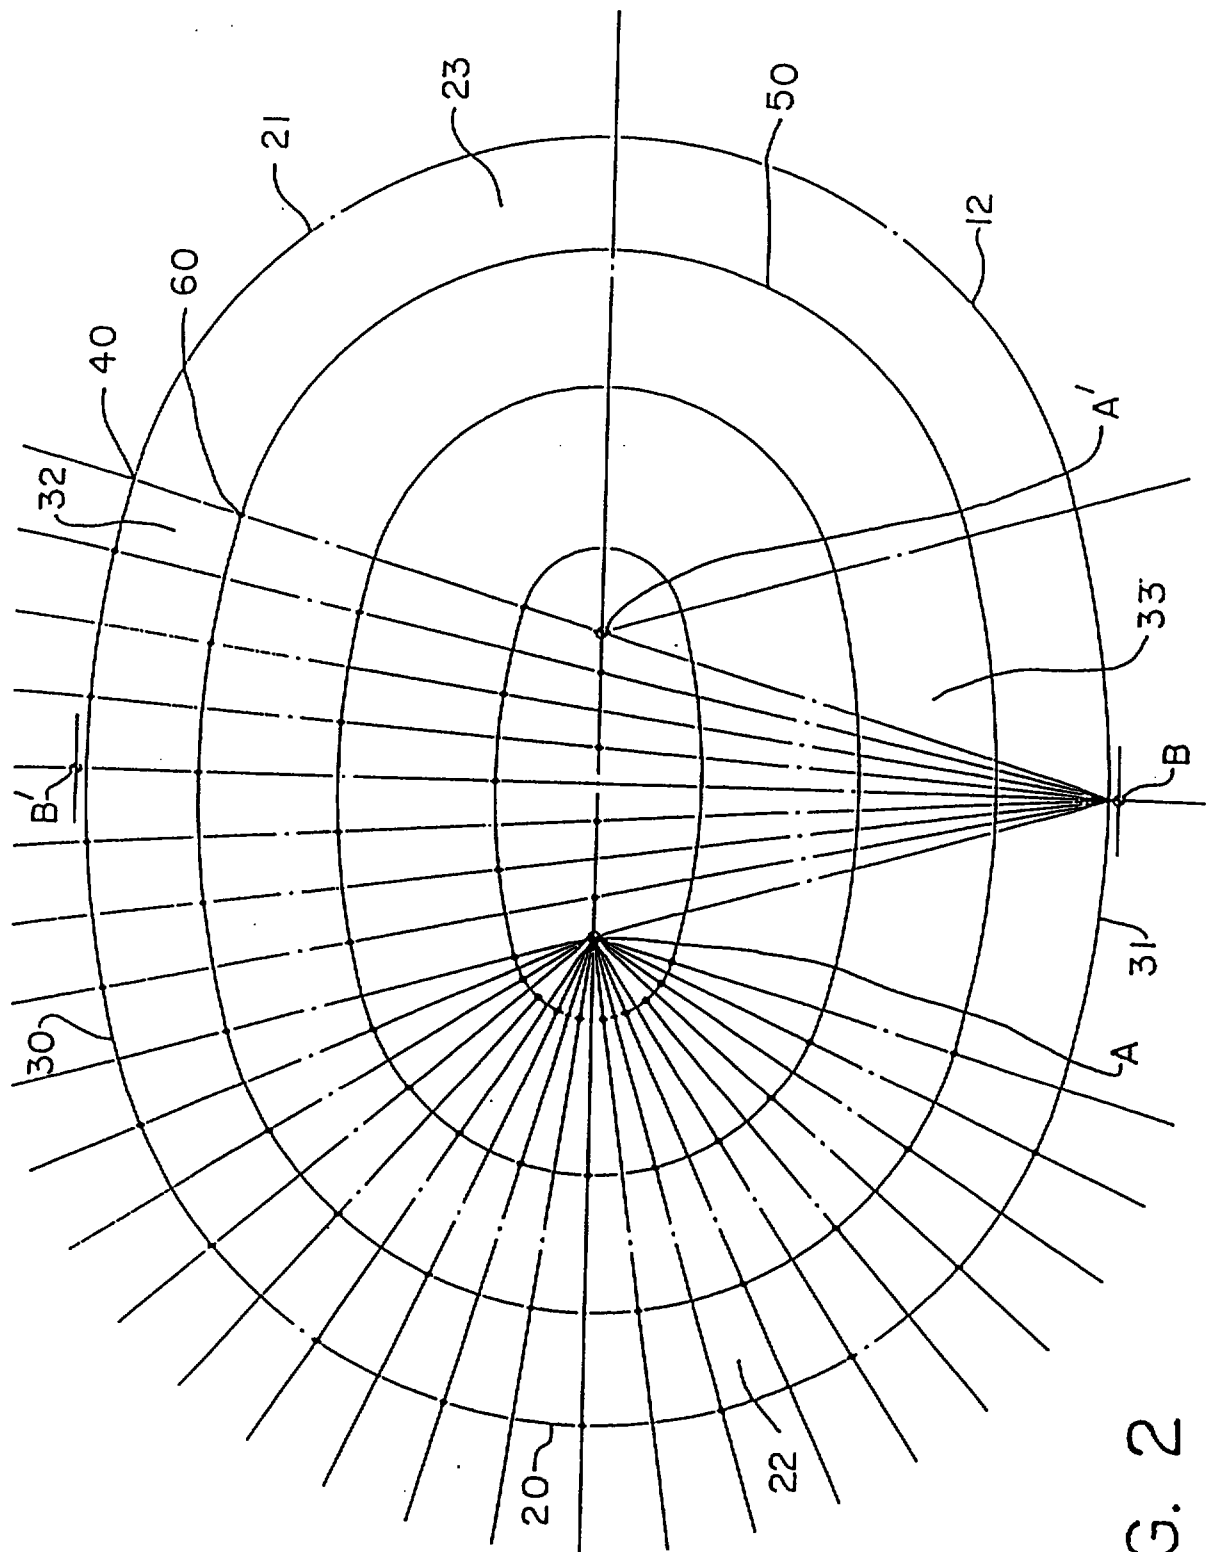


FIG. 2

This Sheet Has Been Replaced



SUBSTITUTE SHEET

3/14


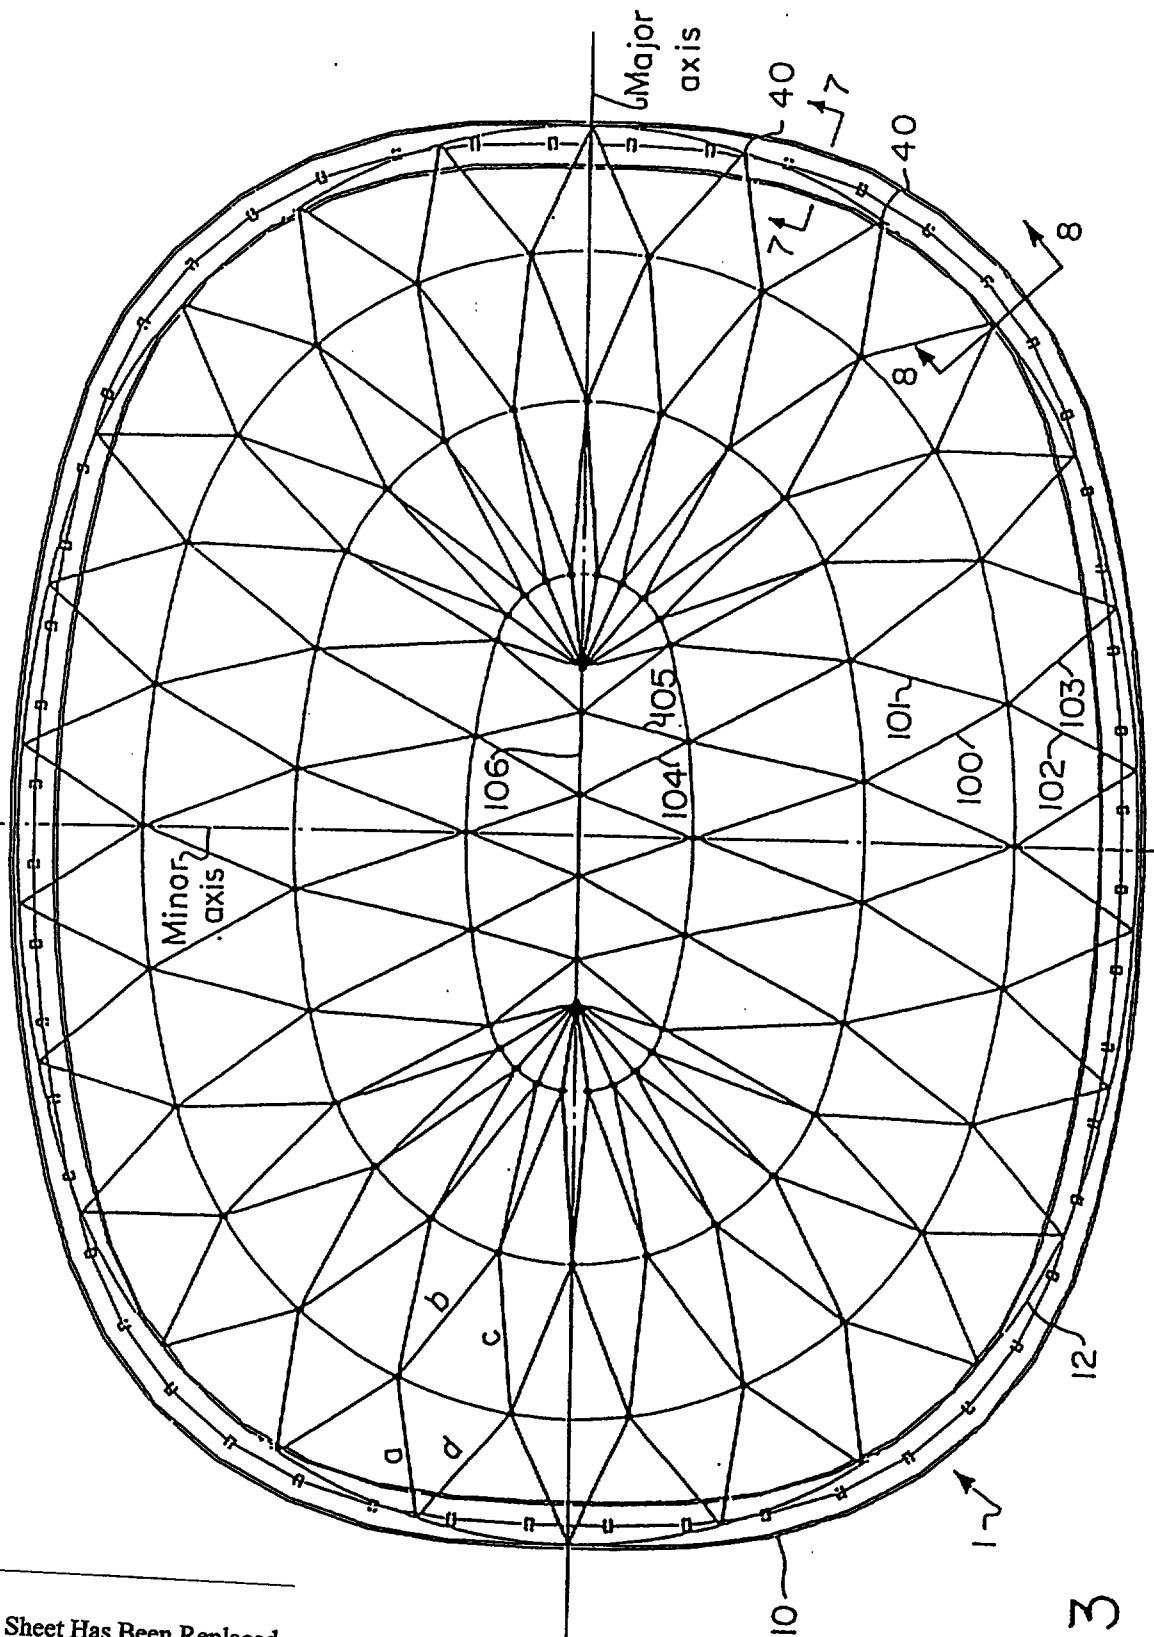


FIG. 3


This Sheet Has Been Replaced



SUBSTITUTE SHEET

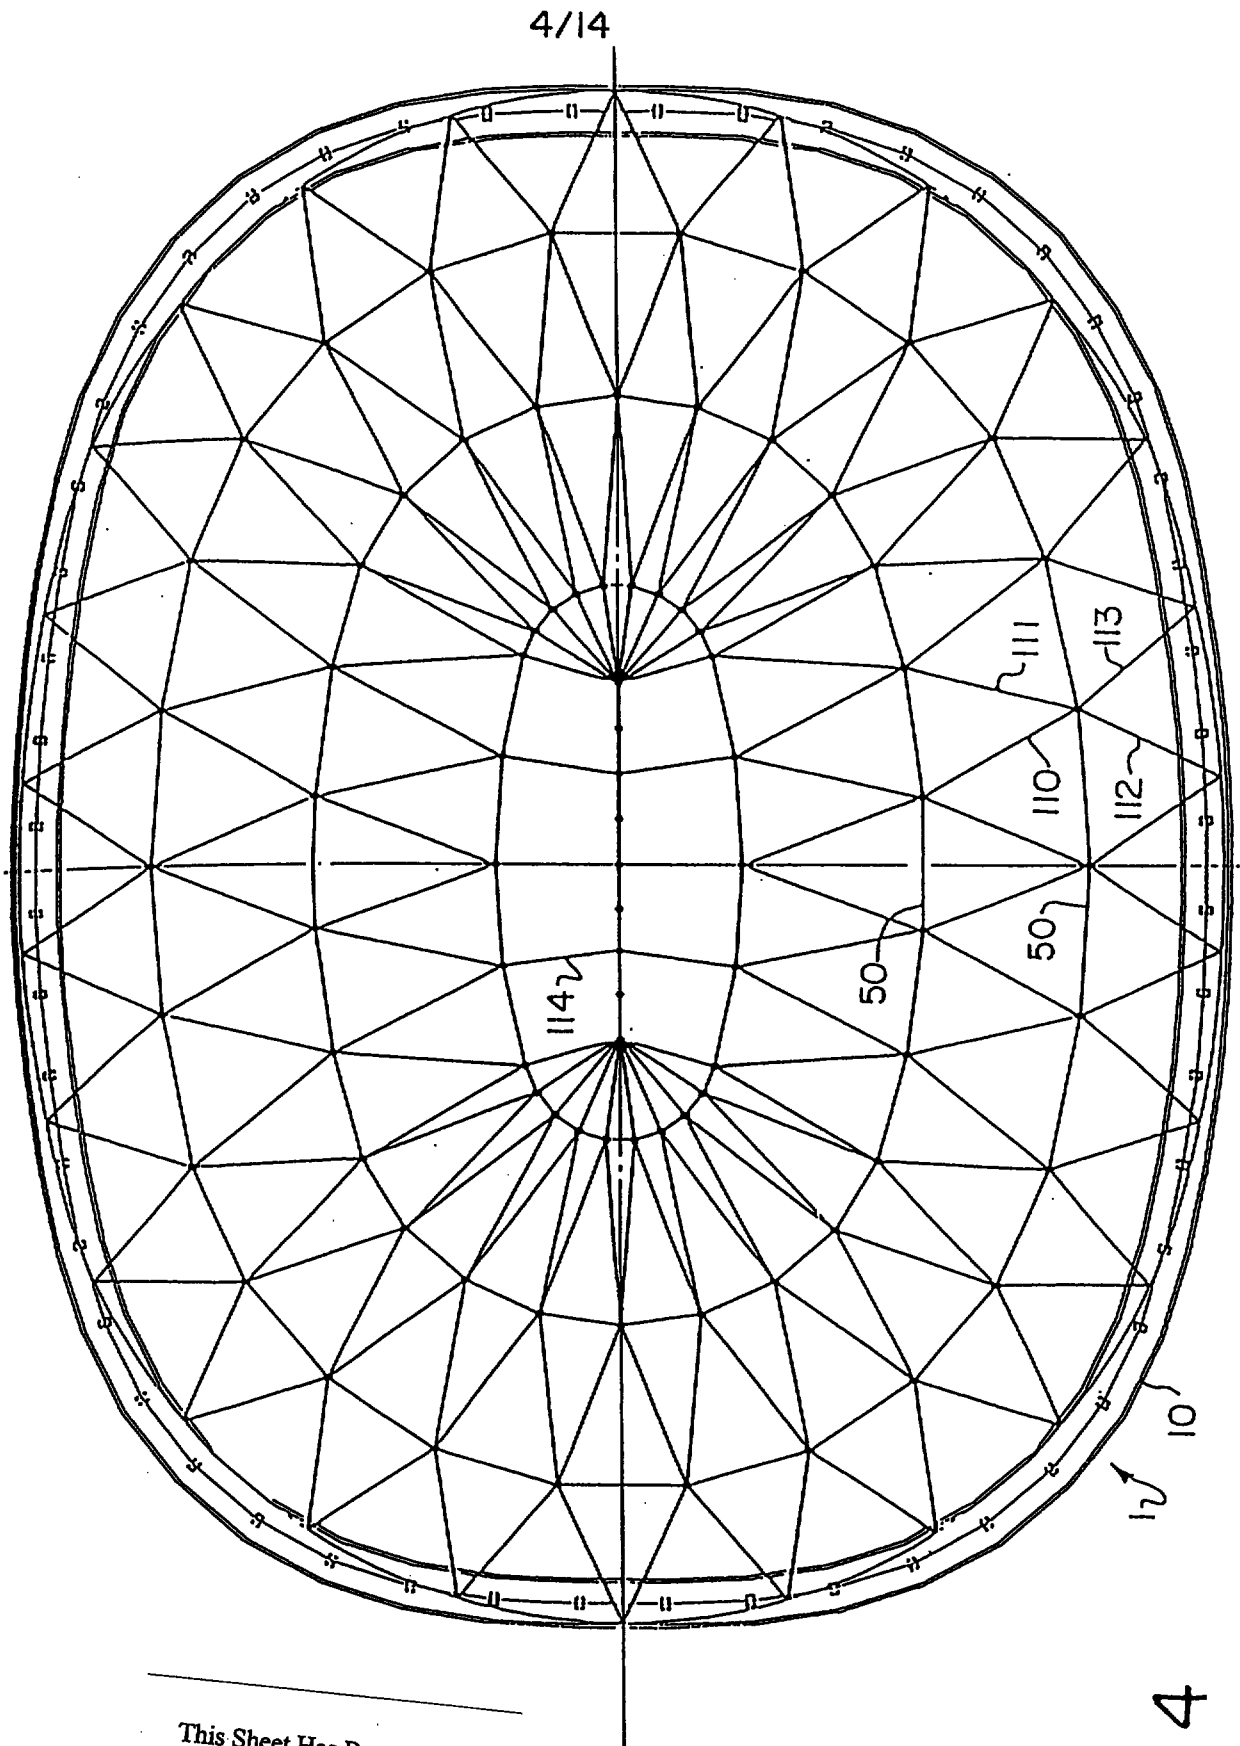

This Sheet Has Been Replaced



SUBSTITUTE SHEET

FIG. 4

6/14

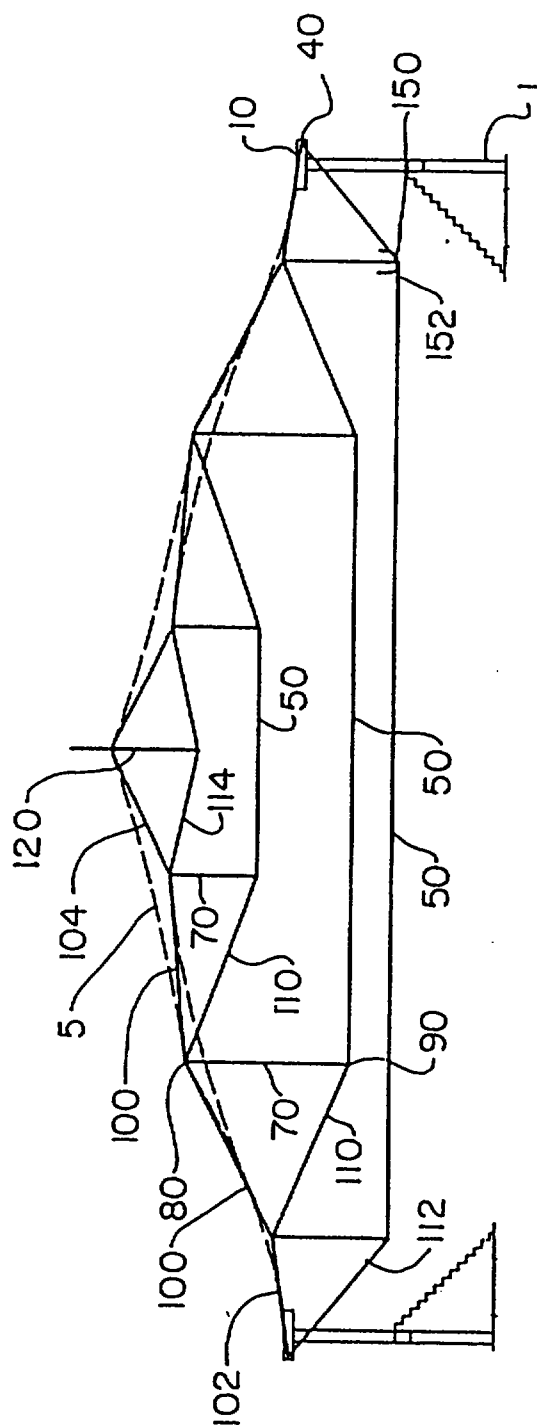


FIG. 6

This Sheet Has Been Replaced



SUBSTITUTE SHEET

7/14

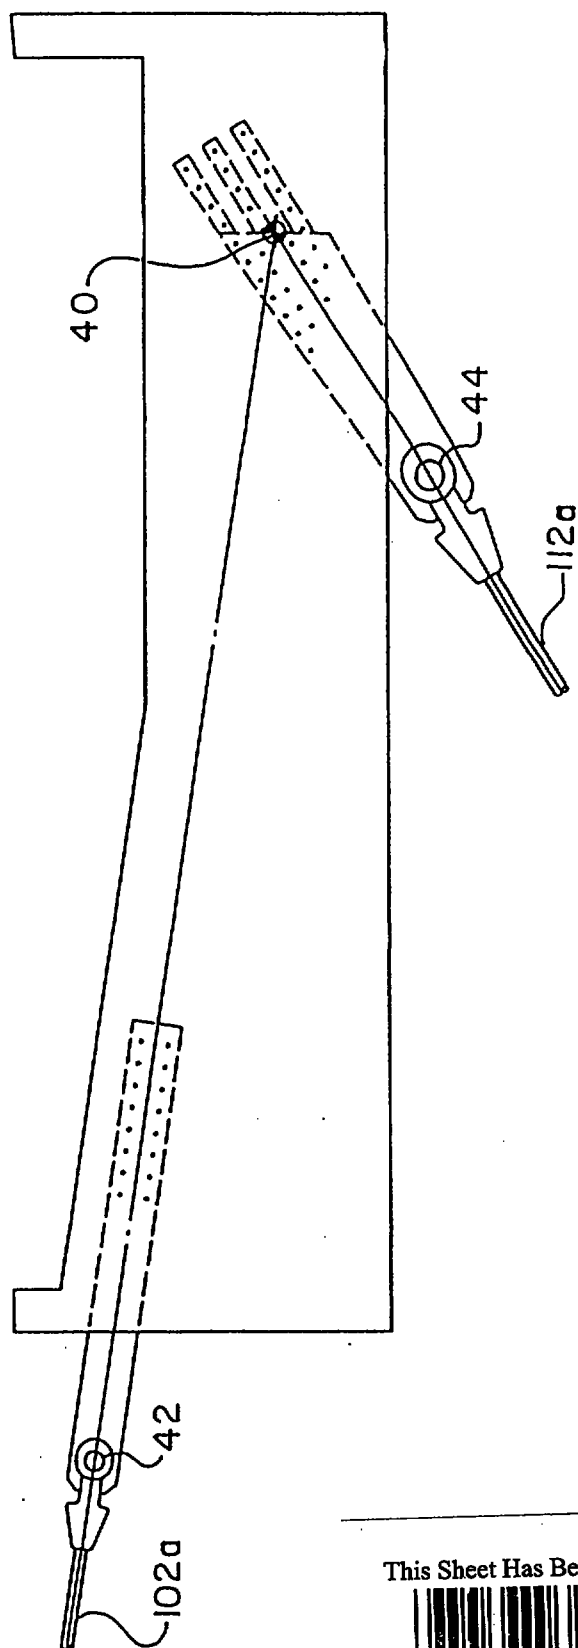


FIG. 7

This Sheet Has Been Replaced



SUBSTITUTE SHEET

8/14

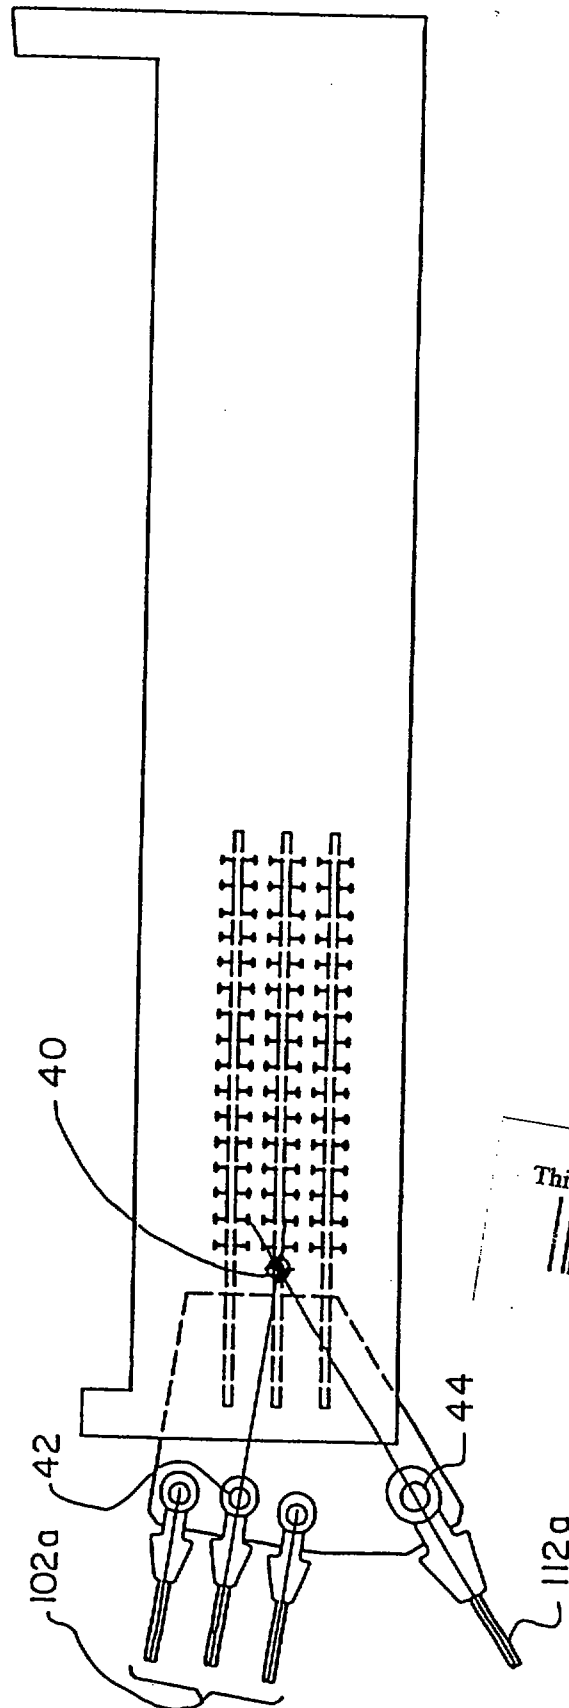


FIG. 8

This Sheet Has Been Replaced



SUBSTITUTE SHEET

9/14

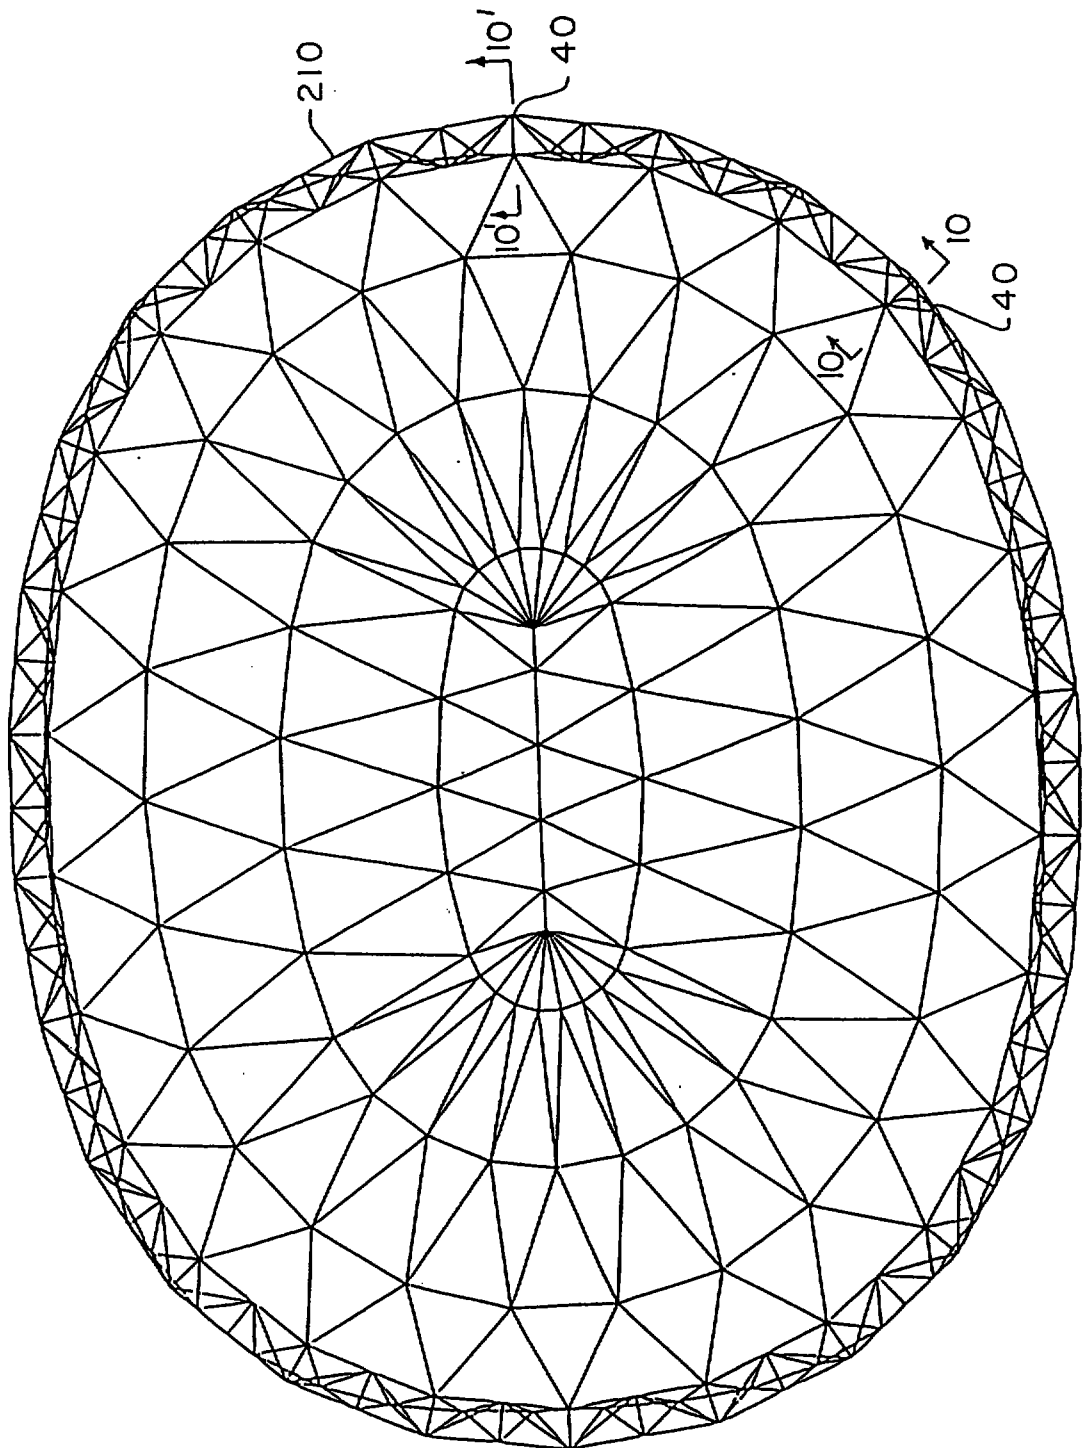


FIG. 9

This Sheet Has Been Replaced



SUBSTITUTE SHEET

10/14

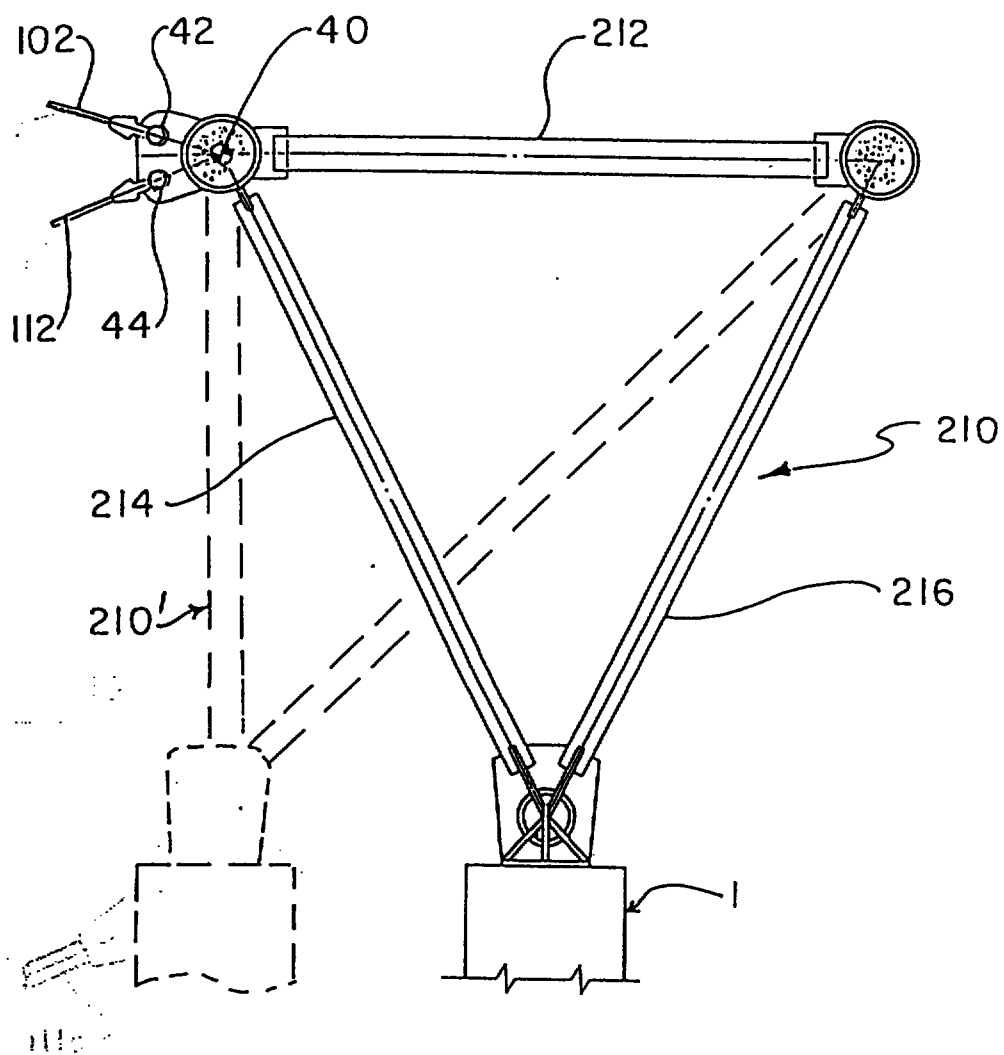


FIG. 10

This Sheet Has Been Replaced



SUBSTITUTE SHEET

11/14

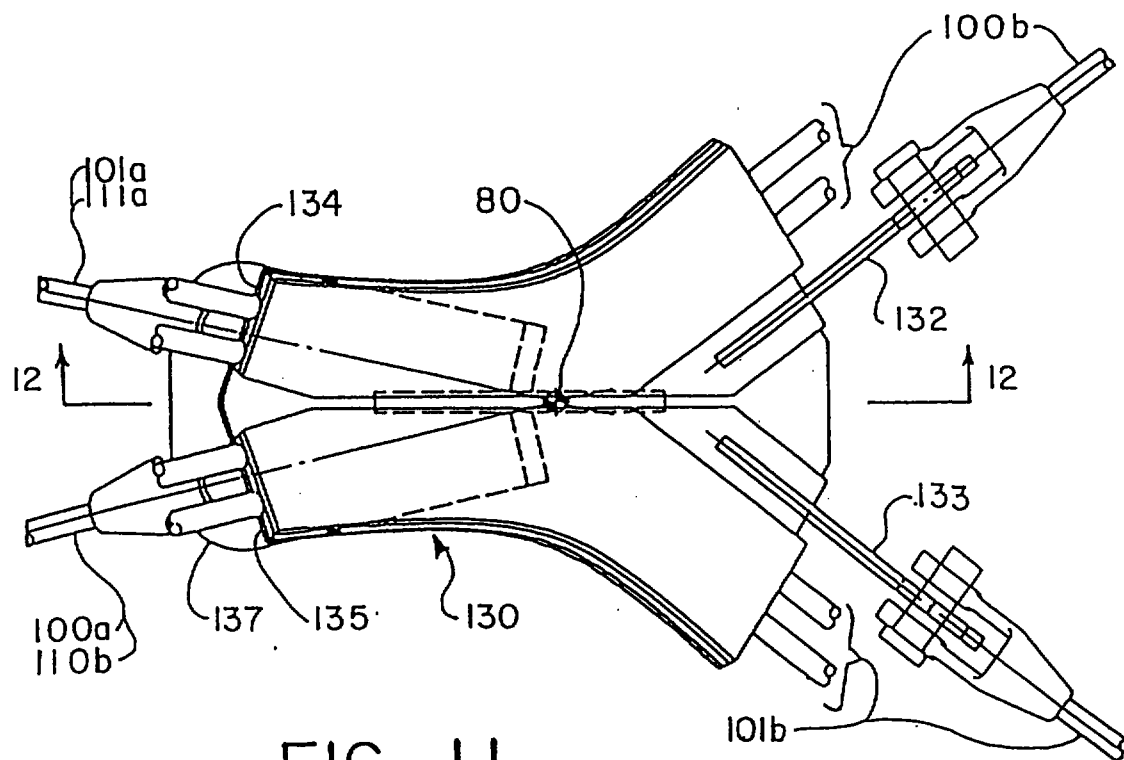


FIG. 11

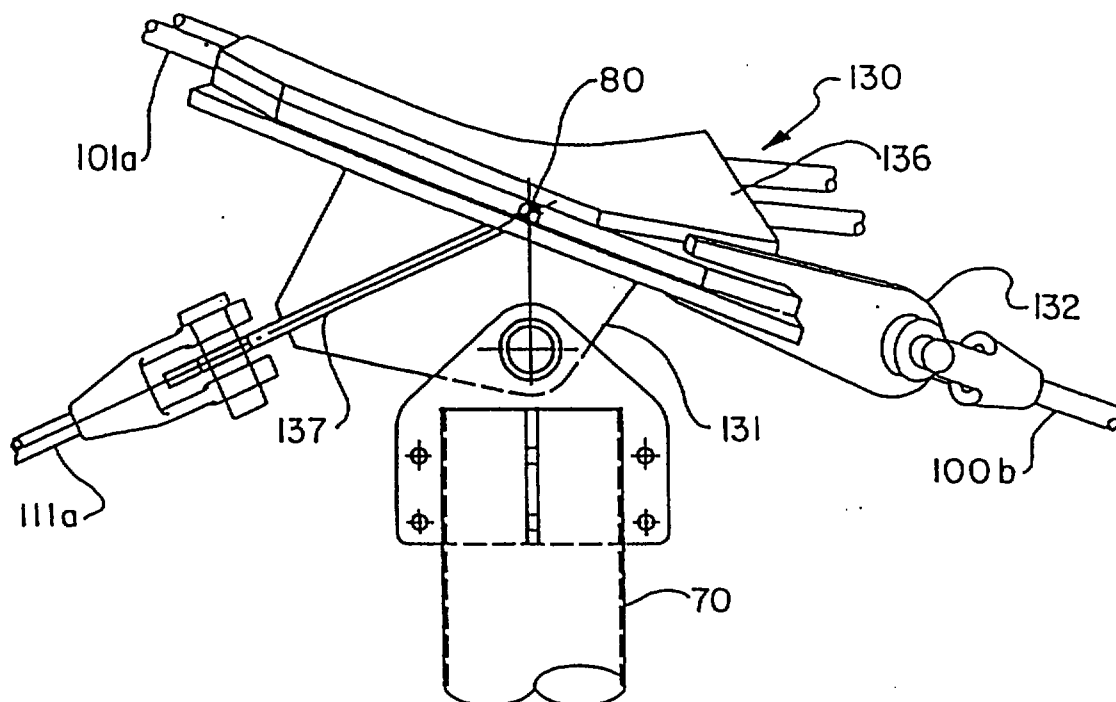


FIG. 12

This Sheet Has Been Replaced

SUBSTITUTE SHEET

12 / 14

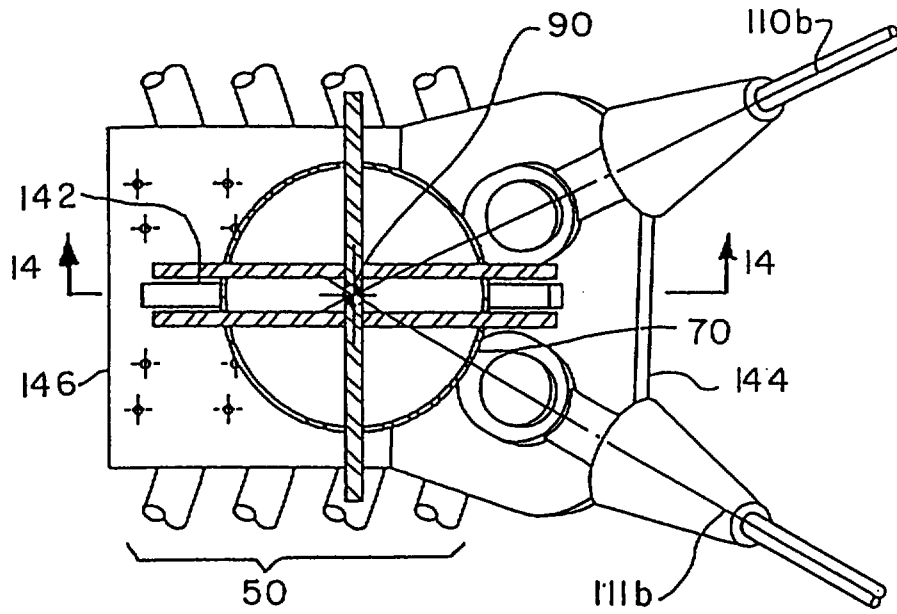


FIG. 13

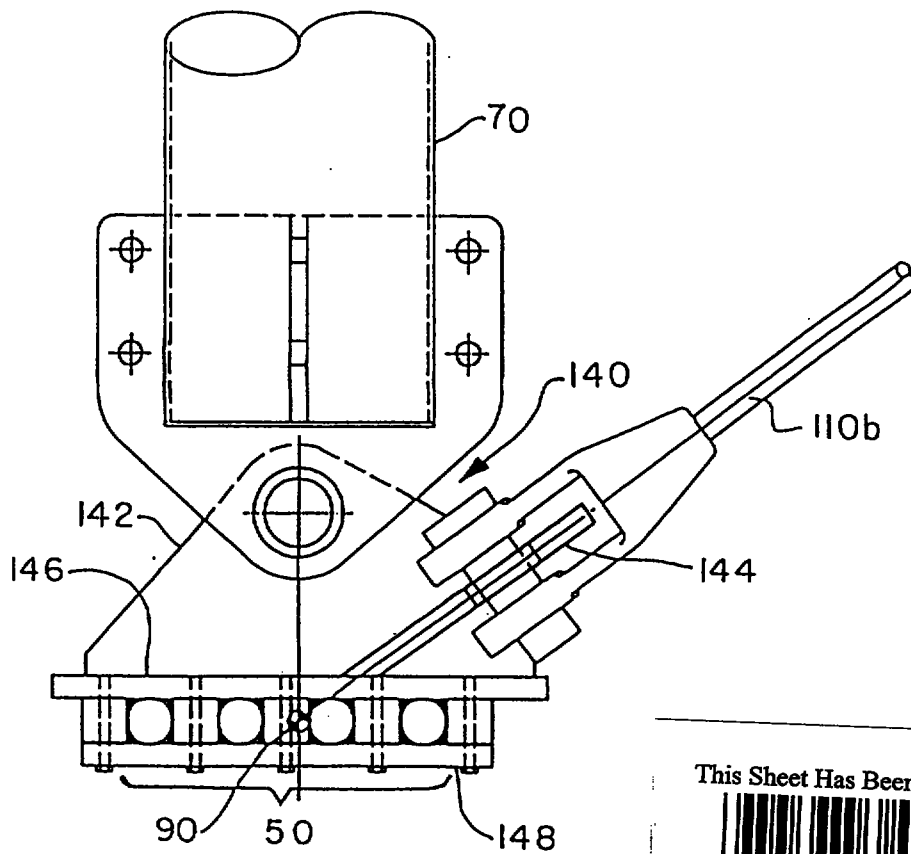



FIG. 14

SUBSTITUTE SHEET

This Sheet Has Been Replaced



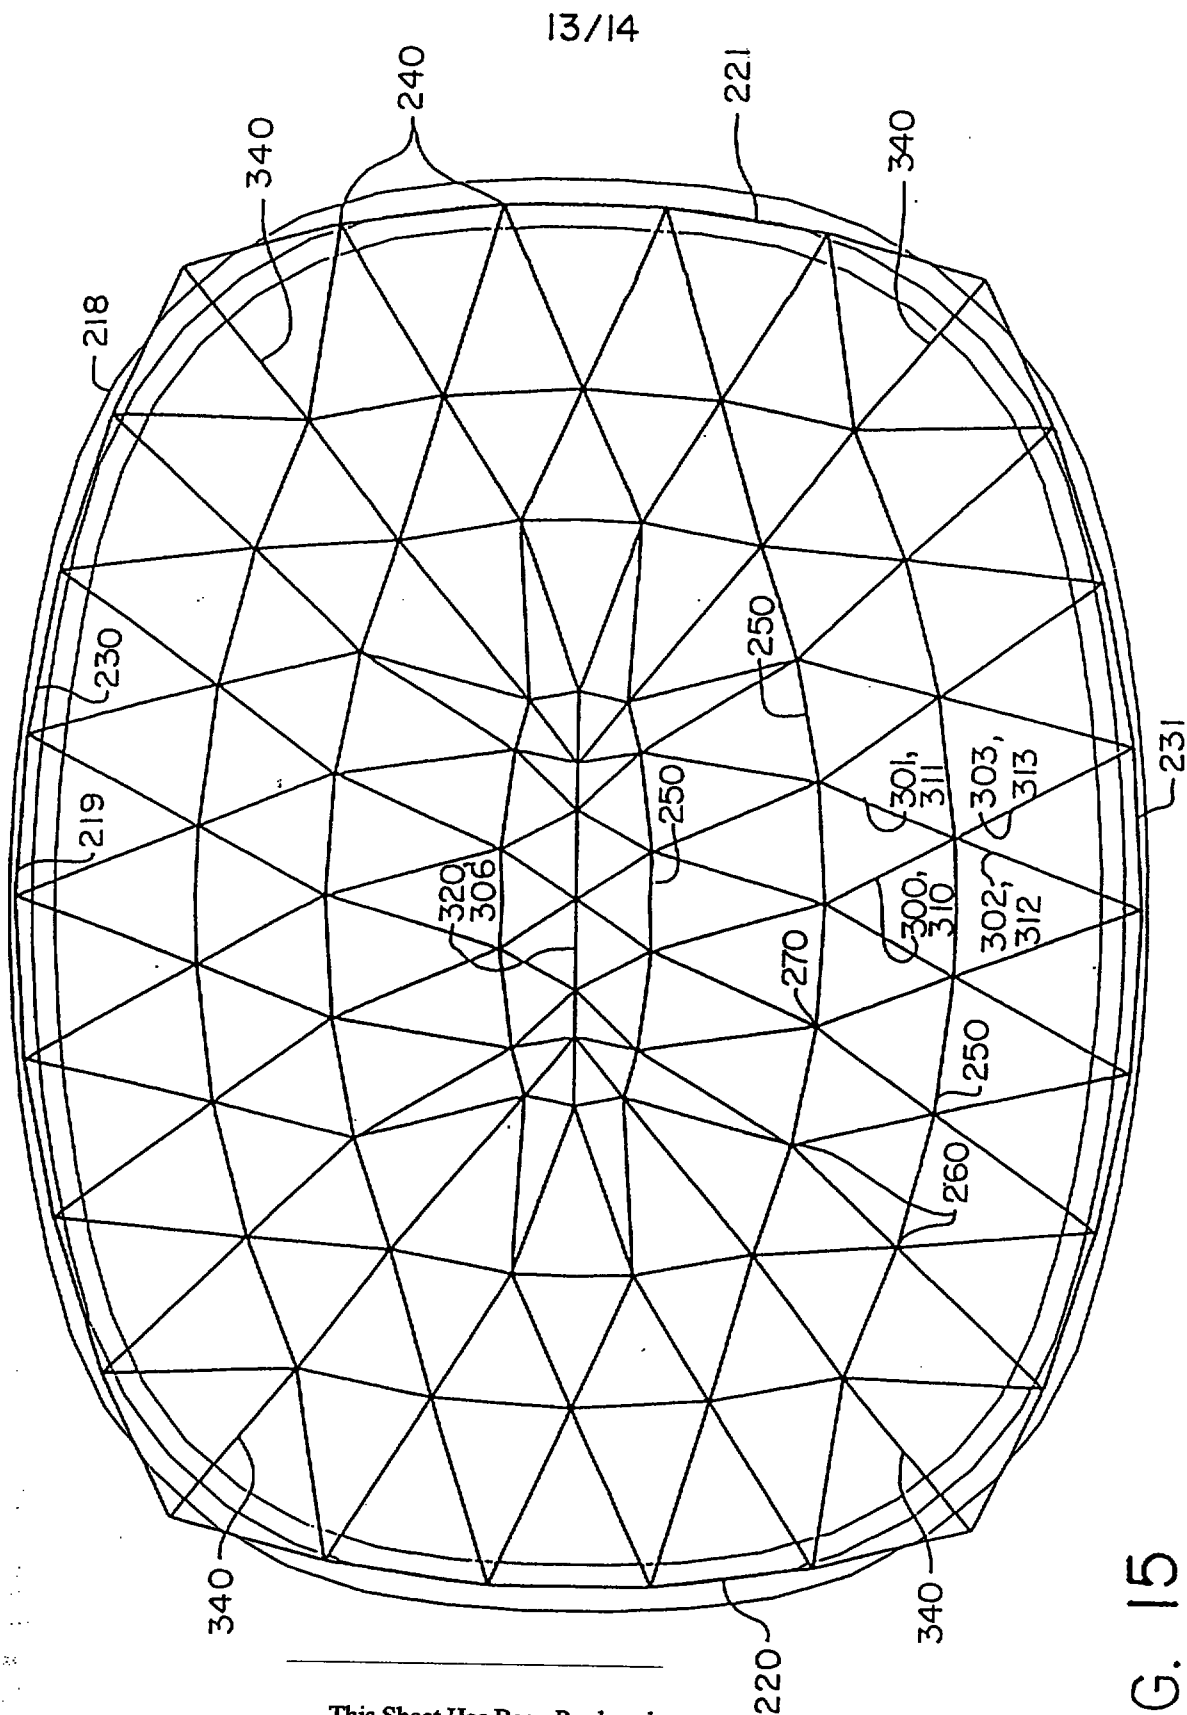


FIG. 15

This Sheet Has Been Replaced



SUBSTITUTE SHEET


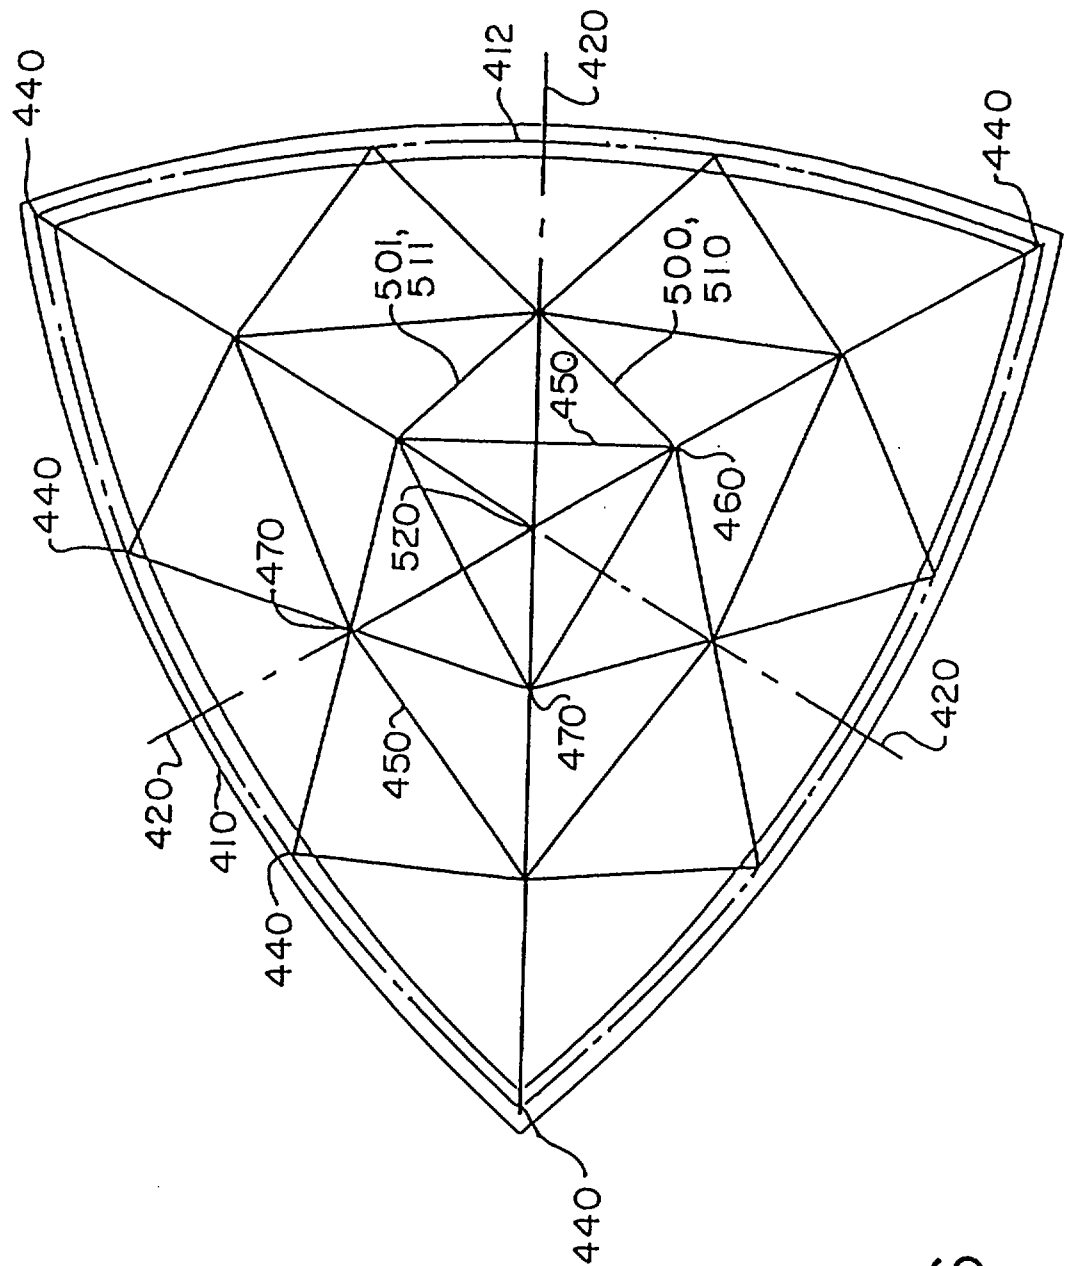


FIG. 16

This Sheet Has Been Replaced






INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : E04B 7/14	A1	(11) International Publication Number: WO 92/08015 (43) International Publication Date: 14 May 1992 (14.05.92)
(21) International Application Number: PCT/US91/08096 (22) International Filing Date: 1 November 1991 (01.11.91) (30) Priority data: 608,497 2 November 1990 (02.11.90) US (71) Applicant: WEIDLINGER ASSOCIATES [US/US]; 333 Seventh Avenue, New York, NY 10001 (US). (72) Inventor: LEVY, Matthys, P. ; 334 West 89th Street, New York, NY 10024 (US). (74) Agent: MORRIS, Francis, E.; Pennie & Edmonds, 1155 Avenue of the Americas, New York, NY 10036 (US).	(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), LU (European patent), NL (European patent), SE (European patent). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: TRIANGULATED ROOF STRUCTURE

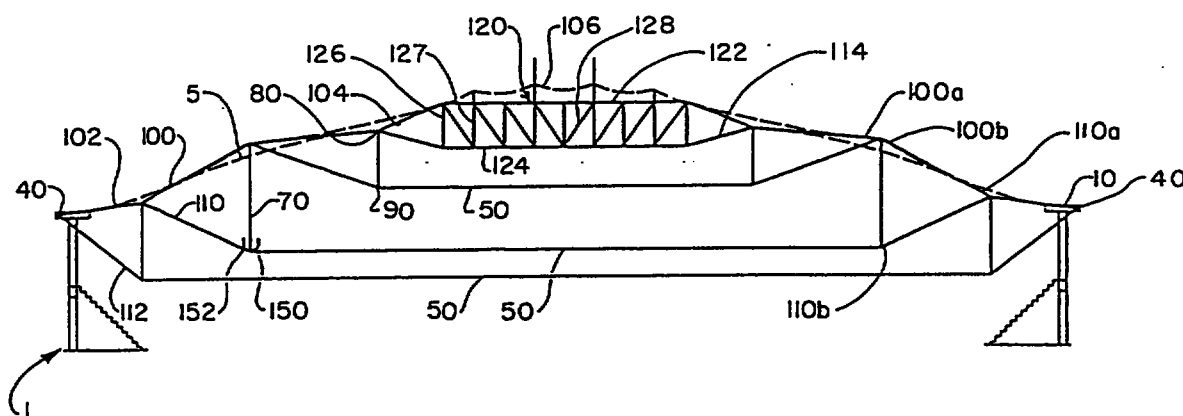

(57) Abstract

A triangulated roof structure for supporting a roof that projects in plan a substantially closed oval curve having major and minor axes, includes a substantially horizontal outer compression ring (10), a substantially planar cable truss (120) positioned along the major axis of the oval, a plurality of oval tension hoop (50) concentrically arranged within the compression ring at different heights relative to a common reference plane, and a plurality of substantially vertical compression members (70) having upper and lower ends (80, 90) affixed at their lower ends (90) to each of the oval tension hoops (50). The compression members (70) are located so that compression members affixed to a first tension hoop (50) are not radially aligned with compression members affixed to an adjacent tension hoop (50). The structure also includes a plurality of tension elements (100, 101, 110, 111) interconnecting a compression member affixed to the first tension hoop to a proximal pair of compression members affixed to an adjacent tension hoop.

- 1 -

TRIANGULATED ROOF STRUCTURE

REPLACEMENT SHEET

11 MAR 1997

Background of the Invention

This invention relates to a triangulated roof structure which supports a roof for an underlying building, arena or stadium. More particularly, it relates to a roof structure formed of a plurality of tension members and compression members arranged in a triangulated manner for supporting a roof that projects in plan a closed non-circular curve.

In recent years, dome roofs have been constructed in a variety of manners. For example, some dome roofs are constructed wherein the roof is supported only by rigid structural members forming the dome without the use of interior columns or beams. Such structures, however, exhibit high aspect ratios, that is, the ratio of surface area to delineated plan area, in order to provide sufficiently low membrane stress. Other roof structures have been constructed wherein a lightweight membrane is supported by air pressure. These structures, while exhibiting low aspect ratios, suffer from numerous disadvantages. The primary disadvantage involves the reliance on a mechanical device, such as a blower, for structural stability. A breakdown in such a mechanical device results in deflations, a common problem for air-supported roofs. In addition, these air-supported roofs require an airtight underlying structure.

Other structures have been built using the principles of catenary suspension typically associated with the construction of suspension bridges. These structures often achieve the low aspect ratio of air-supported roof structures without the detrimental reliance on mechanical devices for structural stability. For example, U.S. Patent No. 3,139,957 to Fuller illustrates structures in which a series of box frames of polygonal, cylindrical or other forms, of progressively varying sizes are arranged in a

11 MAR 1997

-2-

concentric array at sequentially different heights above a common plane of reference. These frames are also arranged in vertical overlapping spaced relation to one another to achieve incremental increases or decreases in altitude. Tension elements in the form of flexible cables or wires extend between and are secured to adjacent pairs of box frames in the series, which suspend and anchor the box frames to one another.

Specifically, each frame includes upper chord members and lower chord members which form polygons defining the upper and lower peripheries of the respective frames. Each frame also includes vertical compression columns which extend between the vertices of the polygon formed by the upper chord members and the corresponding vertices of the polygon formed by the lower chord members. A first pair of tension members are supplied which extend downwardly, in a criss-crossing manner, from their point of securement at two adjacent upper vertices of a lower frame to two corresponding adjacent lower vertices of an upper frame whereby successive frames in the series are suspended from one another. These tension members criss-cross when viewed in plan. A second pair of tension members are supplied which extend upwardly, in a criss-crossing manner, from their points of securement at two adjacent lower vertices of the lower frame of the pair to two corresponding adjacent upper vertices of the upper frame in the pair, whereby successive frames in the series are anchored down to one another. These tension elements also criss-cross when viewed in plan. Also, these two pairs of tension members, when viewed in elevation, also criss-cross.

In addition, two other pairs of tension members are supplied which are disposed in radial planes containing the central axis of the structure. The

11 MAR 1997

-3-

first pair of tension members extend downwardly from their point of securement at two adjacent upper vertices of the lower frame to two radially aligned lower vertices of an upper frame. The second pair of tension members extend upwardly from their points of securement at two adjacent lower vertices of the lower frame to two radially aligned upper vertices of the upper frame. These two sets of tension members criss-cross when viewed in elevation.

The Fuller structures while applicable to a wide range of building shapes, are unnecessarily complicated. Fuller requires a plurality of criss-crossing cables, and consequently, requires complicated attachment structures to accommodate the number of cables arriving at any particular attachment point. Also, due to the number of criss-crossing cables, which serve to suspend, anchor, buttress, resist torque, and resist counter-torquing of the frame, the Fuller structures are unduly redundant.

Further, although the roof structures described in the Fuller patent recognize the tremendous savings of constructing a building using the tensile strength of materials, the use of polygonal frames described in this reference and the number of tension members used to interconnect the series of frames to one another, provide serious drawbacks. The most serious drawback involves the problems encountered when the disclosure of Fuller is applied to structures having a non-circular perimeter. In particular, due to the concentric relation of the frames to one another, the angular relationship of anchoring cables and suspension cables to one another varies at successive frames and may also vary around the perimeter.

Therefore, different attachment configurations must be designed for all of the vertices of each of the frames.

11 MAR 1997

This significantly increases fabrication costs and construction time.

Another example of a structure using catenary principles is the circular cable truss dome illustrated in U.S. Patent No. 4,736,553 to Geiger. This truss dome, which is not triangulated, is constructed from a plurality of radially oriented support members. The support members include, in a vertical plane, at least one upper tensioned member forming a top chord, at least one diagonal tensioned member which extends inwardly and downwardly from the upper tensioned member and at least one vertical rigid strut in compression, which is attached at its upper end to the upper tensioned member and attached at its lower end to the diagonal tensioned member. In this arrangement, the tensioned members form two adjacent sides of a triangle while the compression member forms the third side. At least one horizontal tensioned hoop concentric with the outer compression ring is also provided. The tensioned hoop is affixed to the lower end of the compression member.

The radially oriented support members are attached at an outer edge to a continuous compression ring which delineates the area to be covered by the dome. At an inner end, the support members are attached to a horizontal inner tension ring. A flexible membrane is placed on top of the support members to form a roof for the delineated area. In addition, a plurality of valley cables are positioned on top of the flexible membrane, between adjacent support members, which extend between the compression ring and the inner tension ring to maintain the flexible membrane in tension.

This structure, however, does not use triangulated construction. As a result, the structure

11 MAR 1997

lacks a degree of lateral stability at the top radial chord of the dome and therefore relies on the flexible membrane for stiffness. Furthermore, due to the radial arrangement of the support members, this structure is only appropriate for use in circular stadiums. Most stadiums or arenas are, however, non-circular.

Roof structures have been developed to support a roof for such non-circular buildings. For example, U.S. Patent No. 3,841,038 to Geiger relates to a non-circular roof structure which defines an enclosed building space, including a ring which projects in plan substantially to a closed curve having major and minor axes and a plurality of skewed axes of symmetry. In this roof structure, a plurality of sets of rigid arches are connected to the ring to form the roof, with the arches of at least two sets respectively extending in plan substantially parallel to a separate one of the skewed axes of symmetry of the closed curve, and the arches of another set extending in plan substantially parallel to the major or minor axis of the closed curve. These arches impose a funicular load on the ring and support a roof deck structure to form a domed surface.

This structure, while applicable to non-circular structures is unnecessarily complicated, requiring at some points the intersection of up to six arches. This causes extremely complicated attachments at these intersections. Also, this structure is constructed with rigid arches and, therefore, does not efficiently use the tensile strength of building materials and may also result in a roof structure having a high aspect ratio.

Because of the drawbacks highlighted above, none of these prior art roof structures efficiently utilize a triangulated arrangement of tension members

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-6-

REPLACEMENT SHEET

11 MAR 1997

and compression members to construct a roof adaptable to a variety of non-circular underlying arenas.

Summary Of The Invention

I have devised a roof structure for a non-circular underlying building structure, such as a stadium, arena or the like, which overcomes the disadvantages and shortcomings of the above-mentioned prior art structures when such structures are applied to non-circular stadiums. Specifically, I have devised a triangulated roof structure for a non-circular underlying structure which reduces the degree of complication of the joint details by approximating the shape of the underlying structure with a series of circular arcs. This triangulated arrangement provides greater redundancy and is better able to handle the nonsymmetric loading conditions which such structures typically encounter.

In accordance with the present invention, a triangulated cable arrangement is disclosed for supporting a roof that projects in plan a closed non-circular curve. The roof defines an enclosed area for an underlying building space having a non-circular perimeter including major and minor axes. The roof structure includes an outer compression ring having a plan which substantially matches the perimeter of the underlying building. A non-circular curve is constructed on the compression ring, using a plurality of circular arcs, which closely approximates the non-circular perimeter of the underlying building space.

The triangulated structure of the present invention also includes a plurality of hoop-like tension members which are concentrically arranged within the non-circular curve at different heights relative to a common reference plane. A plurality of

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-7-

REPLACEMENT SHEET

11 MAR 1997

vertical compression members or posts, having upper and lower ends, are affixed at their lower ends at spaced-apart locations on each of the hoop-like tension members. The upper and lower ends of the compression members define upper and lower attachment points or nodes, respectively. The compression members are located on each of these hoop-like tension members, such that each compression member located on a first hoop-like tension member and a proximal pair of compression members on an adjacent hoop-like tension member form, in projection on the plan, the vertices of a substantially isosceles triangle. Similarly, attachment points or nodes are located on the non-circular curve constructed on the outer compression ring such that each node located on the compression ring and a proximal pair of compression members located on an outermost hoop-like tension member also form, in plan, the vertices of a substantially isosceles triangle.

The structure further includes a plurality of tension elements interconnecting each compression member on a first hoop-like tension member to a proximal pair of compression members on an adjacent hoop-like tension member. Tension elements are also provided for interconnecting each compression member on the outermost hoop-like tension member to a proximal pair of nodes on the outer compression ring.

In this manner, the structure, when viewed in plan, appears as a plurality of substantially isosceles triangles arranged within the non-circular curve constructed on the compression ring. Accordingly, the structure is triangulated.

In accordance with another important aspect of the present invention, a tension member, such as a cable truss, is provided along the major axis of the

THIS SHEET HAS BEEN
REPLACED

11 MAR 1987

FIG. 3 is a top plan view depicting an upper set of tension elements used in a preferred embodiment of the invention;

FIG. 4 is a plan view similar to FIG. 3 depicting a set of diagonal tension elements and three hoop-like tension elements used in a preferred embodiment of the invention;

FIG. 5 is a view along the major axis of the non-circular curve in FIG. 3;

FIG. 6 is a view along the minor axis of the non-circular curve of FIG. 3;

FIG. 7 is a section taken through one node on the compression ring, at line 7-7 of FIG. 3;

FIG. 8 is a section taken through another node on the compression ring, at line 8-8 of FIG. 3;

FIG. 9 is a top plan view similar to FIG. 3 depicting an alternate compression ring comprising a triangular truss;

FIG. 10 is a section through lines 10-10 and 10'-10' of FIG. 9;

FIG. 11 is a top plan view of an upper node of a compression member;

FIG. 12 is a section through line 12-12 of FIG. 11;

FIG. 13 is a top plan view of a lower node of a compression member;

FIG. 14 is a section through line 14-14 of FIG. 13;

FIG. 15 is a top plan view depicting an alternate embodiment of the roof structure shown in FIGS. 3 and 4; and

FIG. 16 is a top plan view of another embodiment of the present invention.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

11 MAR 1997

-10-

Detailed Description Of The Preferred Embodiment

FIG. 1 illustrates, in side elevation view, a preferred embodiment of a triangulated roof structure, generally designated by the numeral 2, designed in accordance with my invention. Roof structure 2 defines an enclosed area for an underlying building space having a non-circular perimeter. Roof structure 2 includes a flexible membrane constructed from a plurality of diamond shaped panels, which provides a roof for the enclosed space. Cross-sections and plan views of this triangulated roof are shown in FIGS. 2-6.

FIG. 2 illustrates one non-circular configuration for which the present invention may be used, including a compression ring 10 having a non-circular plan which substantially matches the perimeter of an underlying building space 1 having major and minor axes. Constructed on compression ring 10 is a non-circular curve 12 which comprises a plurality of circular arcs. Non-circular curve 12 includes a first pair of circular arcs 20, 21 having their centers A, A' on the major axis of the non-circular curve formed by the perimeter of underlying building structure 1. Centers A, A' of circular arcs 20, 21 are equidistant from the minor axis and on opposite sides. Circular arcs 20, 21 form end sectors 22, 23 for the area enclosed by non-circular curve 12. Non-circular curve 12 further includes a second pair of circular arcs 30, 31 having centers B, B' located on the minor axis of the non-circular curve formed by the perimeter of underlying building structure 1. Centers B, B' of circular arcs 30, 31 are equidistant from the major axis and on opposite sides. Circular arcs 30, 31 form intermediate segments 32, 33. As shown in FIG. 2, first pair of circular arcs 20, 21 and second pair of circular arcs 30, 31 intersect to form non-circular

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

-11-

curve 12. Similarly, end sectors 22, 23 combine with intermediate segments 32, 33 to form the area enclosed by non-circular curve 12.

A plurality of hoop-like tension members 50 are concentrically arranged within non-circular curve 12 at different heights relative to a common plane. Vertical compression members 70, having upper and lower ends, are attached at their lower ends to each tension member 50 at spaced-apart locations 60 on the tension member. The upper ends of compression members 70 define upper attachment points or nodes 80 and the lower ends define lower attachment points or nodes 90. Compression members 70 are located on each hoop-like tension member 50 such that a compression member 70 on a first hoop-like tension member 50 and a proximal pair of compression members 70 on an adjacent hoop-like tension member 50 form, in plan, the vertices of a substantially isosceles triangle. Similarly, attachment points (or nodes) 40 are located on outer compression ring 10 such that a node 40 located on outer compression ring 10 and a proximal pair of compression members 70 on an outermost hoop-like tension member 50 form, in plan, the vertices of a substantially isosceles triangle.

Nodes 40 on compression ring 10, lying within end sectors 22, 23 are located at the intersections of non-circular curve 12 with alternating ones of a plurality of radial lines drawn in end sectors 22, 23 through centers A, A' of circular arcs 20, 21, respectively. Similarly, compression members 70 on hoop-like tension members 50, lying within end sectors 22, 23 are located at the intersections of alternating ones of hoop-like tension members 50, with alternating ones of the above-mentioned plurality of radial lines

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

drawn through centers A, A' of circular arcs 20, 21, respectively.

In similar fashion, nodes 40 on compression ring 10, lying within intermediate segments 32, 33 are located at the intersections of non-circular curve 12 with alternating ones of a plurality of radial lines drawn in intermediate segments 32, 33 through centers B, B' of circular arcs 30, 31, respectively. Compression members 70 on hoop-like tension members 50, lying within intermediate segments 32, 33 are located at the intersections of alternating ones of hoop-like tension members 50 with alternating ones of the above plurality of radial lines drawn through centers B, B' of circular arcs 30, 31. In this manner, the triangulated geometry of the present invention is adapted to a wide range of non-circular perimeters to accommodate an underlying structure.

One roof construction according to the present invention is shown in FIGS. 3 and 4, wherein compression ring 10, having an oval shape to match the perimeter of underlying building structure 1 rests upon a number of concrete support columns or other suitable foundation which may extend upward from underlying structure 1. Non-circular curve 12 is constructed on compression ring 10 as described above. A plurality of hoop-like tension members 50 are concentrically arranged within non-circular curve 12 on compression ring 10. As best seen in FIGS. 5 and 6, hoop-like tension members 50 are arranged within compression ring 10 at different heights relative to a common reference plane. A plurality of vertical compression members 70 are affixed at their lower ends to each of hoop-like tension members 50.

A plurality of tension elements are provided for interconnecting each compression member 70 affixed

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1987

to a first hoop-like tension member 50 to a proximal pair of compression members 70 affixed to an adjacent hoop-like tension member 50. Fig. 3 depicts, in plan, the triangulated arrangement of the tension elements that run between the upper ends of the compression elements. Fig. 4 depicts, in plan, the hoop-like tension members 50 as well as the triangulated arrangement of diagonal tension elements that run between the upper end of one compression element and the lower end of an adjacent compression element.


As best shown in FIGS. 3-6, these tension elements include: a first upper tension member 100 (Fig. 3) extending from upper node 80 of compression member 70 affixed to the first hoop-like tension member 50 to upper node 80 of one of the proximal pair of compression members 70 affixed to the adjacent hoop-like tension member 50; a second upper tension member 101 (Fig. 3) extending from upper node 80 of compression member 70 affixed to the first hoop-like tension member 50 to upper node 80 of the other one of the proximal pair of compression members 70 affixed to the adjacent hoop-like tension member 50; a first diagonal tension member 110 (Fig. 4) extending from upper node 80 of compression member 70 affixed to the first hoop-like tension member 50 to lower node 90 of one of the proximal pair of compression members 70 affixed to adjacent hoop-like tension member 50; and a second diagonal tension member 111 (Fig. 4) extending from upper node 80 of compression member 70 affixed to the first hoop-like tension member 50 to lower node 90 of the other one of the proximal pair of compression members 70 affixed to adjacent hoop-like tension member 50.

The triangulated structure of the present invention also includes means for securing the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

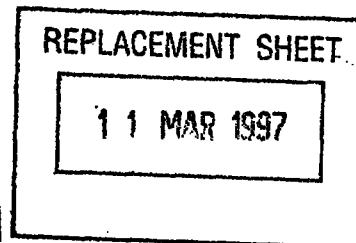

outermost hoop-like tension member 50 and compression members 70 attached thereto to compression ring 10. In the preferred embodiment, a plurality of tension elements interconnect each compression member 70 affixed to outermost hoop-like tension member 50 to a proximal pair of nodes 40 on compression ring 10.

Preferably, the plurality of tension elements include: a first upper tension member 102 (Fig. 3) extending outwardly from upper node 80 of compression member 70 affixed to outermost hoop-like tension member 50 to one of the proximal pair of nodes 40 on compression ring 10; and second upper tension member 103 (Fig. 3) extending outwardly from upper node 80 of compression member 70 affixed to outermost hoop-like tension member 50 to the other one of the proximal pair of nodes 40 on compression ring 10; a first diagonal tension member 112 (Fig. 4) extending outwardly from lower node 90 of compression member 70 affixed to outermost hoop-like tension member 50 to one of the proximal pair of nodes 40 on compression ring 10; and a second diagonal member 113 (Fig. 4) extending outwardly from lower node 90 of compression member 70 affixed to outermost hoop-like tension member 50 to the other one of the proximal pair of nodes 40 on compression ring 10.

As shown in FIGS. 7 and 8, nodes 40 further include attachment members 42 for attaching upper tension members 102, 103 to compression ring 10 and attachment members 44 for attaching diagonal tension members 112, 113 to compression ring 10. Attachment members 42, 44 are designed such that the intersection of the axial centerlines of all tension members attached to compression ring 10 coincide with nodes 40. In the preferred embodiment, compression ring 10 comprises a concrete box girder. Since nodes 40 lie on

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

11 MAR 1997

non-circular curve 12 constructed on compression ring 10, the location of nodes 40 on compression ring 10 varies around non-circular curve 12. Accordingly, the location of attachment members 42, 44 also varies around compression ring 10.

In an alternate embodiment, illustrated in FIGS. 9 and 10, compression ring 10 comprises triangular truss 210. Triangular truss 210 further includes horizontal top truss 212 and a pair of inclined side trusses 214, 216 which are secured to top truss 212 and which extend downward from top truss 212 to a common point. The shape of triangular truss 210 varies around the perimeter of the underlying structure to accommodate the change in the location of nodes 40 relative to the underlying structure, due to the approximation of the perimeter by non-circular curve 12. Truss 210 in FIG. 10 illustrates the shape of the truss when node 40 lies inside a support column of underlying structure 1, such as at line 10-10 of FIG. 9. Truss 210' illustrates the shape of the truss when node 40 lies directly above a support column of underlying structure 1, such as at line 10'-10' of FIG. 9.

In the preferred embodiment, a cable truss 120, shown in FIG. 5, is positioned along the major axis between centers A, A' of circular arcs 20, 21 to incorporate a triangulated geometry into a non-circular configuration. Cable truss 120 preferably includes an upper tension member forming a top chord 122, a lower tension member parallel to top chord 122 forming a bottom chord 124, a plurality of compression members 126 and 127, of varying heights, having upper and lower ends. The lower ends of compression members 126, 127 are affixed to bottom chord 124. The upper ends of compression members 126 are affixed to top chord 122,



This Sheet Has Been Replaced



-16-

REPLACEMENT SHEET

11 MAR 1997

while compression members 127 are affixed to top chord 122 at some point below their upper ends. Cable truss 120 also includes a plurality of diagonal tension members extending from the point at which a first compression member 126, 127 is affixed to top chord 122 to the lower end of an adjacent compression member 126, 127, forming diagonal chords 128.

Also, a plurality of tension elements are provided for interconnecting an innermost hoop-like tension member 50 to cable truss 120. In the preferred embodiment, these tension elements interconnect each compression member 70 affixed to innermost hoop-like tension member 50 to at least one compression member 126, 127 of cable truss 120. Preferably, as shown in FIGS. 3 and 4, these tension elements include: at least one upper tension member 104 (Fig. 3) extending inwardly from upper node 80 of compression member 70 affixed to innermost hoop-like tension member 50 to the upper end of at least one compression member 126, 127 of cable truss 120 and at least one diagonal tension member 114 (Fig. 4) extending inwardly from upper node 80 of compression member 70 affixed to innermost hoop-like tension member 50 to the lower end of at least one compression member 126, 127 on cable truss 120.

In order to provide a roof which has an overall downward slope, an uppermost tension member 106 (Fig. 3) is positioned along the major axis between A, A', above cable truss 120 and is connected to the upper ends of compression members 127.

One particular advantage of the present invention is that the number of structural members in tension is maximized to more efficiently utilize the tensile property of the building materials. Therefore, the structural members that are in tension are preferably formed of flexible materials such as cables.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-17-

REPLACEMENT SHEET

11 MAR 1997

for example, hoop-like tension members 50, upper tension members 100-106, diagonal tension members 110-114, top chord 122, bottom chord 124, and diagonal chord 128 of cable truss 120, preferably comprise cable such as wire strand, or wire rope. In the preferred embodiment, upper tension members 100-106 comprise a plurality of cables which may drop off toward the center of the structure. Compression members 70 as well as compression members 126, 127 of cable truss 120 are preferably rigid posts such as steel pipe.

FIGS. 11 and 12 illustrate an upper attachment 130 which may be affixed to the upper end of compression members 70. Upper attachment 130 is designed to attach to a compression member 70 first ends 100a, 101a of a first set of upper tension members 100, 101, second ends 100b, 101b of a second set of upper tension members 100, 101, and first ends 110a, 111a of a set of diagonal tension members 110, 111. Upper attachment 130 includes: a first attachment plate 131 for attaching the upper end of compression member 70; a pair of attachment plates 132, 133 located on an outer side of compression member 70 for attaching second ends 100b, 101b of upper tension members 100, 101, which extend inwardly from upper nodes 80 of a proximal pair of compression members 70 located on an outer adjacent hoop-like tension member 50; a second pair of attachment plates 134, 135 located on an inner side of compression member 70 for attaching first ends 100a, 101a of upper tension members 100, 101, which extend inwardly from upper node 80 of compression member 70 to upper nodes 80 of a proximal pair of compression members 70 located on an inner adjacent hoop-like tension member 50; a saddle-like plate 136 positioned above attachment plates 134, 135 and

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-18-

REPLACEMENT SHEET

11 MAR 1997

conforming to the geometry therebetween for providing additional structural support to the attachment of upper tension members 100, 101; and a second attachment plate 137 for attaching first ends 110a, 111a of diagonal tension members 110, 111, which extend inwardly from upper node 80 of compression member 70 to lower nodes 90 of a proximal pair of compression members 70 located on an inner adjacent hoop-like tension member 50. Significantly, upper attachment 130 is designed such that the intersection of the axial centerlines of all tension members 100, 101, 110, 111 and compression member 70 attached thereto coincide with upper node 80.

FIGS. 13 and 14 illustrate a lower attachment 140 which may be affixed to the lower end of compression member 70 and which in turn affixes the lower end of compression member 70 to hoop-like tension member 50 at nodes 60. Lower attachment 140 includes: a first plate 142 for attaching the lower end of compression member 70; a second attachment plate 144 located on an outer side of compression member 70 for attaching the second ends 110b, 111b of diagonal tension members 110, 111, which extend inwardly from upper nodes 80 of a proximal pair of compression members 70 located on an outer adjacent hoop-like tension member 50; and a third attachment plate 146 for securing the lower end of compression member 70 to hoop-like tension members 50. A plate 148, located beneath plate 146, may also be included to secure the lower end of compression member 70 to hoop-like tension member 50. Lower attachment 140 is designed such that the axial centerlines of diagonal tension members 110, 111 and compression member 70 as well as the radial centerline of hoop-like tension member 50 attached thereto coincide with lower node 90.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-19-

REPLACEMENT SHEET

11 MAR 1997

Overlying upper tension members 100-106 of the triangulated support structure is a flexible membrane 5 serving as a roof for the underlying structure. Membrane 5 may be formed by Teflon™-coated fiberglass, silicone coated polyester, or corrugated steel, although it is contemplated that other materials such as canvas may also be used. Preferably, however, membrane 5 is constructed of Teflon™-coated fiberglass.

In the preferred embodiment, membrane 5 comprises a plurality of diamond-shaped panels, such as panel abcd shown in FIG. 3. The vertices of these roof panels coincide with upper nodes 80 of compression members 70 and are secured to upper attachments 130. As such, these diamond shaped panels form hyperbolic paraboloids. This is best illustrated in FIG. 1. Significantly, the hyperbolic paraboloid shape the roof panels take when secured to upper nodes 80 of compression members 70 contributes to the structural stiffness of these panels, without the use of additional cables on top of membrane 5.

For convenience, a network of catwalks 150 can be constructed on hoop-like tension members 50 to provide for maintenance and installation personnel, as well as to provide mounting for service lighting, speakers and rigging for special events. Catwalks 150 may have handrails 152 on either side to provide safety.

The uniqueness of the cable truss structure designed in accordance with the present invention is best demonstrated by FIG. 1. In particular, the triangulated location of compression members 70 on hoop-like tension members 50 in an offset relation, gives rise to the unique hyperbolic paraboloid shape of the roof panels when attached to upper nodes 80 of compression members 70. The triangulated structure

THIS SHEET HAS BEEN
REPLACED




11 MAR 1997

provides an added degree of stability over prior art structures while minimizing the number of structural members required. Also of particular importance is the tent-like appearance of the overall structure, due primarily to the employment of cable truss 120 along the major axis.

FIG. 15 illustrates another non-circular configuration for which the present invention may be used, in which like elements are numbered in a like manner. This embodiment also includes a compression ring 218 having a non-circular plan which substantially matches the perimeter of the underlying building space. In this embodiment, however, a discontinuous non-circular curve 219 is constructed on compression ring 218 from a plurality of circular arcs, wherein each of the arcs has the same radius. Non-circular curve 219 includes a first pair of circular arcs 220, 221 having their centers on the major axis of the non-circular curve formed by the perimeter of the underlying building structure. The centers of circular arc 220, 221 are equidistant from the minor axis and on opposite sides. Non-circular curve 219 further includes a second pair of circular arcs 230, 231 having their centers located on the minor axis of the non-circular curve formed by the perimeter of the underlying building structure. The centers of circular arc 230, 231 are equidistant from the major axis and on opposite sides. First pair of circular arcs 220, 221 and second pair of circular arcs 230, 231 intersect to form discontinuous non-circular curve 219.

A plurality of hoop-like tension members 250 are concentrically arranged within non-circular curve 219 at different heights relative to a common plane. Nodes 240 are located at the intersections of the above-described circular curves which make up non-

This Sheet Has Been Replaced



-21-

REPLACEMENT SHEET


11 MAR 1997

circular curve 219. Additional nodes 240 are evenly spaced between the nodes located at these intersections. Vertical compression members 270 having upper and lower ends are attached at their lower ends to each hoop-like tension member 250 at spaced-apart locations 260 on the tension members. Compression members 270 are located on each hoop-like tension member 250 such that a compression member 270 on a first hoop-like tension member 250 and a proximal pair of compression members 270 on an adjacent hoop-like tension member 250 form, in plan, the vertices of a substantially isosceles triangle. Compression members 270 on an outermost hoop-like tension member 250 are located such that a node 240 located on outer compression ring 218 and a proximal pair of compression members 270 on the outer most hoop-like tension member 250 form, in plan, the vertices of a substantially isosceles triangle. A cable truss 320 is positioned along the major axis to complete the triangulated structure.

As described with respect to the embodiment shown in FIGS. 3 and 4, the structure includes upper and diagonal tension members 300, 301 and 310, 311, respectively, which interconnect each compression member 270 on a first hoop-like tension member 250 to the proximal pair of compression members 270 on an adjacent hoop-like tension member 250. Also, upper and diagonal tension members 302, 312 interconnect a compression member 270 located on outermost hoop-like tension member 250 to a proximal pair of nodes 240 on outer compression ring 218. Finally, tension elements are provided to interconnect compression members 270 on an inner most hoop-like tension member 250 to cable truss 320.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-22-

REPLACEMENT SHEET

11 MAR 1997

In this embodiment, all of the upper attachments on any one hoop-like tension member 250 are identical since the angular relation of tension members arriving at an upper node are identical for each compression member on the hoop. Similarly, all of the lower attachments are identical. Only the upper and lower attachments for compression members lying along lines 340 are different for each hoop.

FIG. 16 illustrates another non-circular configuration for which the present invention may be used, where like elements are designated by like numerals. This embodiment is drawn specifically to an underlying structure having a substantially triangular perimeter. A compression ring 410 is provided having a plan which substantially matches the triangular perimeter of the underlying building space. In this embodiment, a discontinuous non-circular curve 412 is constructed from three circular arcs having the same radius. The centers of these arcs are located on meridians 420 which are drawn from each vertex of the triangle to a middle point of the opposite side of the triangle. In this manner, non-circular curve 412 is constructed which substantially matches the perimeter of the underlying building space.

Nodes 440 are located at each vertex of the triangle and additional nodes 440 are evenly spaced along non-circular curve 412 between each vertex. A plurality of hoop-like tension members 450 are concentrically arranged within non-circular curve 412 at different heights relative to a common plane. Vertical compression members 470 are attached at their lower ends to each hoop-like tension member at spaced-apart locations 460 on the tension members such that a compression member 470 on a first hoop-like tension member 450 and a proximal pair of compression members

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-23-

REPLACEMENT SHEET

11 MAR 1997

470 on an adjacent hoop-like tension member 450 form, in plan, the vertices of a substantially isosceles triangle.

Upper and diagonal tension members 500, 501 and 510, 511, respectively, are provided which interconnect compression member 470 on the first hoop-like tension member 450 to the proximal pair of compression members 470 located on the adjacent hoop-like tension member 450. Also, upper and diagonal tension members are provided which interconnect each compression member 470 on an outermost hoop-like tension member 450 to at least one node 440 on outer compression member 410.

In addition, a tension element 520, such as a post, is provided at a center point of the triangle. Tension elements are also provided which interconnect each compression member 470 on an innermost hoop-like tension member 450 to inner tension element 520. In this manner, a triangulated structure is achieved wherein the upper and lower attachments along each hoop-like tension member are the same.

While the drawings illustrate a roof structure for a non-circular underlying structure, it is apparent that the triangulated cable arrangement disclosed in the present invention is also applicable to circular stadiums or arenas. In the case of a circular stadium or arena, a single tension member, such as an inner hoop-like tension member or single post, is employed at the center of the circle. As previously described with respect to a non-circular configuration, compression members on circular tension hoops and nodes on a circular compression ring are located at the intersections of alternating ones of a plurality of radial lines drawn through the center of the circle with alternating ones of the tension hoops

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-24-

REPLACEMENT SHEET

11 MAR 1997

and a circular curve constructed on the compression ring. Compression members define upper and lower nodes as described before, and upper tension members as well as diagonal tension members interconnect each compression member on a first tension hoop to a proximal pair of compression members on an adjacent tension hoop. In this manner, a triangulated circular roof structure is constructed.

In a similar manner, an eye-shaped roof structure may also be constructed. In this case, a pair of circular arcs, each having a center located on the minor axis, equidistant from the major axis and on opposite sides, intersect to form a discontinuous eye-shaped curve which approximates the perimeter of the underlying structure. A tension member, such as a cable truss, is positioned along the major axis and a plurality of tension hoops are concentrically arranged within the eye-shaped curve.

Nodes are located on a compression ring at the intersections of the two circular arcs. Additional nodes are evenly spaced along the eye-shaped curve between the nodes located at these intersections. Compression members are located on the tension hoops such that a compression member on a first tension hoop and a proximal pair of compression members on an adjacent hoop form, in plan, the vertices of a substantially isosceles triangle. Also, compression members on an outermost tension hoop are located such that a compression member on the outermost tension hoop and a proximal pair of nodes on the compression ring form, in plan, the vertices of a substantially isosceles triangle. A plurality of tension elements interconnect each compression member on a first tension hoop to the proximal pair of compression members on an adjacent hoop. Finally, a plurality of tension

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

elements interconnect each compression member on the outermost hoop to the proximal pair of nodes on the compression ring.

As is apparent from the description above, the present invention is well-suited for adapting triangulated structure to a wide variety of non-circular and circular configurations. By using at least one circular arc to approximate the configuration of the underlying structure, an efficient cable arrangement is derived. By approximating an underlying non-circular configuration with a plurality of circular arcs, the triangulated geometry disclosed in the present invention may be used for a wide variety of shapes while reducing the variety of cable attachment geometries and increasing the number of attachments in which the geometry of cables arriving thereat is the same. This allows for the use of one upper attachment to be used at a plurality of upper nodes as well as one lower attachment to be used at a plurality of lower nodes.

While the invention has been described in conjunction with specific embodiments, it is evident that numerous alternatives, modifications, and variations will be apparent to those skilled in the art in light of the foregoing description.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

Claims

What is claimed is:

1. A triangulated structure for supporting a roof that projects in plan a substantially closed oval curve having major and minor axes, comprising:
 - a substantially horizontal outer compression ring;
 - a substantially planar cable truss positioned along the major axis of the oval;
 - a plurality of oval tension hoops concentrically arranged within said compression ring at different heights relative to a common reference plane;
 - a plurality of substantially vertical compression members having upper and lower ends, defining upper and lower nodes, affixed at their lower ends to one of said oval tension hoops, wherein compression members affixed to a first tension hoop are not radially aligned with compression members affixed to an adjacent tension hoop;
 - a plurality of tension elements interconnecting a compression member affixed to the first tension hoop to a proximal pair of compression members affixed to an adjacent tension hoop, said tension elements including:

- a first upper tension member extending from the upper node of said compression member affixed to said first tension hoop to the upper node of one of said proximal compression members affixed to said adjacent tension hoop;

- a second upper tension member extending from said upper node of said compression member affixed to

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

said first tension hoop to the upper node of the other one of said proximal compression members affixed to said adjacent tension hoop;

a first diagonal tension member extending from said upper node of said compression member affixed to said first tension hoop to the lower node of one of said proximal compression members affixed to said adjacent tension hoop; and

a second diagonal tension member extending from said upper node of said compression member affixed to said first tension hoop to the lower node of the other one of said proximal compression members affixed to said adjacent tension hoop;

means for securing an outermost tension hoop and the vertical compression members attached thereto to said compression ring; and

means for securing an innermost tension hoop to said cable truss.

2. The triangulated structure of claim 1 wherein said substantially closed oval curve comprises at least two circular arcs.

3. The triangulated structure of claim 2 wherein said substantially closed oval curve comprises four circular arcs.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED





-28-

REPLACEMENT SHEET

11 MAR 1997

4. The triangulated structure of claim 3 wherein the area enclosed by the substantially closed oval curve comprises:

first and second end sectors formed by first and second circular arcs, the centers of which lie on the major axis of said oval curve, equidistant from the minor axis and on opposite sides thereof; and

first and second intermediate segments formed by first and second intermediate circular arcs, the centers of which are located on the minor axis of said oval curve, at a predetermined distance from said major axis on opposite side thereof.

5. The triangulated structure of claim 4 wherein compression members located in said first end sector are affixed to said tension hoops at positions defined by the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said first circular arc; and

wherein compression members located in said second end sector are affixed to said tension hoops at positions defined by the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said second circular arc.

6. The triangulated structure of claim 5 wherein compression members located in said first intermediate segment are affixed to said tension hoops at positions defined by the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said first intermediate arc; and

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



11 MAR 1997

wherein compression members located in said second intermediate segment are affixed to said tension hoops at positions defined by the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said second intermediate arc.

7. The triangulated structure of claim 1 wherein said compression ring comprises a plurality of nodes forming a substantially closed oval curve concentric to said outermost tension hoop.

8. The triangulated structure of claim 7 wherein said means for securing said outermost tension hoop and the vertical compression members attached thereto to said compression ring comprises a plurality of tension elements interconnecting a compression member affixed to said outermost tension hoop to a proximal pair of nodes on said compression ring.

9. The triangulated structure of claim 8 wherein said plurality of tension elements comprise:
a first upper tension member extending outwardly from the upper node of said compression member affixed to said outermost tension hoop to one of said proximal nodes on said compression ring;

a second upper tension member extending outwardly from said upper node of said compression member affixed to said outermost tension hoop to the other one of said proximal nodes on said compression ring;

a first diagonal tension member extending outwardly from the lower node of said compression member affixed to said outermost tension hoop to one of said proximal nodes on said compression ring; and



* C L M S *

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

a second diagonal tension member extending outwardly from said lower node of said compression member affixed to said outermost tension hoop to the other one of said proximal nodes on said compression ring.

10. The triangulated structure of claim 7 wherein said compression ring comprises a concrete box girder.

11. The triangulated structure of claim 10 wherein the location of said nodes relative to the cross-section of said girder varies around the perimeter of said compression ring.

12. The triangulated structure of claim 7 wherein said compression ring comprises a triangular truss having a horizontal top truss and a pair of inclined side trusses secured to said top truss, which extend downward from said top truss to a common point.

13. The triangulated structure of claim 1 wherein the number of compression members on each tension hoop is the same.

14. The triangulated structure of claim 1 wherein said tension elements comprise a plurality of cables.

15. The triangulated structure of claim 14 wherein each of said upper tension members comprise wire rope.



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

16. The triangulated structure of claim 14 wherein each of said diagonal tension members comprise wire strand.

17. The triangulated structure of claim 4 wherein said cable truss comprises:

an upper tension member forming a top chord;

a lower tension member parallel to said top chord, forming a bottom chord;

a plurality of compression members of varying heights which are affixed to said top and bottom chords; and

a plurality of diagonal tension members extending from said top chord to said bottom chord between adjacent compression members, forming diagonal chords.

18. The triangulated structure of claim 17 wherein each of said upper, lower and diagonal tension members comprise wire strand.

19. The triangulated structure of claim 17 wherein each of said upper, lower and diagonal tension members comprise wire rope.

20. The triangulated structure of claim 17 wherein said top chord, bottom chord, diagonal chord and compression members all lie in a vertical plane.

21. The triangulated structure of claim 20 wherein said cable truss has first and second ends which coincide with the centers of said first and second circular arcs, respectively.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-32-

REPLACEMENT SHEET

11 MAR 1997

22. The triangulated structure of claim 21 wherein said first and second ends of said cable truss comprise compression members.

23. The triangulated structure of claim 22 wherein said means for securing said innermost tension hoop to said cable truss comprises a plurality of tension elements interconnecting a compression member affixed to said innermost tension hoop to at least one compression member of said cable truss.

24. The triangulated structure of claim 1 wherein said oval tension hoops comprise a plurality of cables.

25. The triangulated structure of claim 24 wherein each of said tension hoops comprise a plurality of wire strands.

26. The triangulated structure of claim 24 wherein each of said tension hoops comprise a plurality of wire ropes.

27. The triangulated structure of claim 1 further including a flexible membrane overlying said structure.

28. The triangulated structure of claim 27 wherein said flexible membrane is selected from Teflon™-coated fiberglass, silicon coated polyester and corrugated steel.

29. The triangulated structure of claim 27 wherein said membrane comprises a plurality of diamond shaped panels, the vertexes of which coincide with the



THIS SHEET HAS BEEN
REPLACED



11 MAR 1997

upper nodes of the substantially vertical compression members.

30. The triangulated structure of claim 29 wherein each of said diamond shaped panels forms a hyperbolic paraboloid when secured to said upper nodes of said vertical compression members.

31. A triangulated cable arrangement for supporting a roof comprising:

an inner tension member;

a plurality of substantially horizontal tension hoops concentrically arranged about said inner tension member at different heights relative to a common reference plane;

a plurality of substantially vertical compression members having an upper end and a lower end, defining upper and lower nodes, affixed at their lower ends to one of said tension hoops, wherein compression members affixed to a first hoop are not radially aligned with compression members affixed to an adjacent tension hoop;

a plurality of tension elements interconnecting a first compression member affixed to said first tension hoop to a proximal pair of compression members affixed to said adjacent tension hoop, said tension elements including:

a pair of upper tension members extending from the upper node of said compression member affixed to said first tension hoop to the upper nodes of each of said proximal pair of compression members affixed to said adjacent tension hoop; and



* C L M S *

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

a pair of diagonal tension members extending from said upper node of said compression member affixed to said first tension hoop to the lower nodes of each of said proximal pair of compression members affixed to said adjacent tension hoop;

means for securing an innermost tension hoop and the compression members attached thereto to said inner tension member; and

means for securing an outermost tension hoop to a support structure.

32. The triangulated cable arrangement of claim 31 wherein said means for securing said innermost tension hoop to said inner tension member comprises a plurality of tension elements interconnecting compression members affixed to said innermost tension hoop to said inner tension member.

33. The triangulated cable arrangement of claim 32 wherein the roof projects in a plan a substantially closed circular curve.

34. The triangulated cable arrangement of claim 33 wherein compression members affixed to every other tension hoop are radially aligned.

35. A support structure for anchoring cables of a triangulated structure which supports a roof projecting in plan a substantially closed oval curve, to an underlying structure having a non-circular perimeter comprising:

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

a compression beam having a plan corresponding to the non-circular perimeter of the underlying structure; and

a plurality of nodes forming in plan a substantially closed oval curve concentric to the substantially closed oval curve of the roof.

36. The support structure of claim 35 wherein said nodes lie along a closed oval curve defined by first and second circular arcs, the centers of which lie on a major axis of the noncircular perimeter of the underlying structure, equidistant from a minor axis and on opposite sides thereof; and first and second intermediate circular arcs, the centers of which are located on the minor axis of the noncircular perimeter of the underlying structure, equidistant from the major axis and on opposite sides thereof.

37. The support structure of claim 36 wherein nodes are located at positions defined by the intersections of said oval curve with a plurality of radial lines drawn through the centers of said first and second circular arcs and said first and second intermediate arcs.

38. The support structure of claim 37 wherein the location of said attachment points relative to the cross-section of said compression beam varies around the perimeter of said support structure.

39. The support structure of claim 38 wherein said compression ring comprises a concrete box girder.

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

40. The support structure of claim 38 wherein said compression beam comprises a triangular truss having a horizontal top truss and a pair of inclined side trusses secured to said top truss, which extend downward from said top truss to a common point.

41. In a structure for supporting a roof, of the type having a plurality of tension hoops concentrically arranged at different heights relative to a common reference plane, a plurality of substantially vertical compression members having upper and lower ends, affixed at their lower ends to one of said tension hoops, at least one upper tension member extending from the upper end of each compression member affixed to a first tension hoop to the upper end of at least one compression member affixed to an adjacent tension hoop and at least one diagonal tension member extending from the upper end of each compression member affixed to said first tension hoop to the lower end of at least one compression member affixed to said adjacent tension hoop, tension member attaching means comprising:

upper attachment means coupled to the upper end of said substantially vertical compression members for attaching at least one upper tension member and at least one diagonal tension member to the upper end of said compression members; and

lower attachment means coupled to the lower end of said substantially vertical compression members for attaching at least one diagonal tension member to the lower end of said compression members and for affixing the lower end of said compression members to one of said tension hoops.

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

42. The attaching means of claim 41 wherein said upper attachment means are configured to attach at least one upper tension member and at least one diagonal tension member to the upper end of said compression member such that the axial centerlines of said at least one upper tension member and said at least one diagonal tension member intersect at a predetermined point lying on the axial centerline of said compression member.

43. The attaching means of claim 41 wherein said lower attachment means are configured to attach at least one diagonal tension member to the lower end of said compression member such that the axial centerline of said at least one diagonal tension member and the radial centerline of said tension hoop intersect at a predetermined point lying on the axial centerline of said compression member.

44. A triangulated structure for supporting a roof that projects in plan a closed non-circular curve, defining an enclosed area for an underlying building space having a non-circular perimeter, including major and minor axes, comprising:

a substantially horizontal outer compression member having a plan substantially matching the perimeter of the underlying building space;

a plurality of nodes located about the perimeter of said compression member defining a substantially closed non-circular curve closely approximating the non-circular perimeter of the building space, said curve comprising:

first and second circular arcs, the centers of which are located at predetermined points on

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



11 MAR 1997

the major axis of the non-circular building perimeter, equidistant from the minor axis and on opposite sides thereof; and

first and second intermediate circular arcs, having a larger radius than said first and second circular arcs, the centers of which are located at predetermined points on the minor axis of the non-circular building perimeter, equidistant from the major axis and on opposite sides thereof;

a plurality of hoop-like tension members concentrically arranged within said non-circular curve at different heights relative to a common reference plane;

a plurality of substantially vertical compression members located on each of said hoop-like tension members, wherein compression members located on a first tension member and a proximal pair of compression members on an adjacent tension member form, in plan, the vertices of a substantially isosceles triangle;

a plurality of tension elements interconnecting each compression member on said first tension member to said proximal pair of compression members on said adjacent member; and

means for interconnecting compression members on an outermost hoop-like tension member to said nodes on said outer compression member.

45. The triangulated roof of claim 44 wherein said first and second circular arcs define first and second end sectors, and wherein said first



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-39-

REPLACEMENT SHEET

11 MAR 1997

and second intermediate circular arcs define first and second intermediate segments.

46. The triangulated roof structure of claim 45 wherein compression members in said first end sector are located at the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said first circular arc; and

wherein compression members in said second end sector are located at the intersections of alternating ones of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said second circular arc.

47. The triangulated roof structure of claim 46 wherein compression member in said first intermediate segment are located at the intersections of alternating one of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said first intermediate arc; and

wherein compression members in said second intermediate segment are located at the intersections of alternating one of said tension hoops with alternating ones of a plurality of radial lines drawn through the center of said second intermediate arc.

48. The triangulated roof structure of claim 44 further comprising a substantially planar cable truss positioned along the major axis of the non-circular perimeter of the building space, which extends from the center of said first circular arc to the center of said second circular arc.



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-40-

REPLACEMENT SHEET

11 MAR 1997

49. A triangulated structure for supporting a roof that projects in plan a closed non-circular curve, defining an enclosed area for an underlying building space having a non-circular perimeter having major and minor axes, comprising:

- an outer compression member having a plan substantially matching the perimeter of the underlying building space;

- a substantially closed non-circular curve, constructed on said compression member, closely approximating the non-circular perimeter of the underlying building space, including:

 - a first pair of circular arcs having their centers on the major axis, equidistant from the minor axis and on opposite sides thereof, forming end sectors; and

 - a second pair of circular arcs having their centers on the minor axis, equidistant from the major axis and on opposite sides thereof, forming intermediate segments, wherein said first and second pairs of circular arcs intersect to form said non-circular curve;

- a plurality of hoop-like tension members concentrically arranged within said non-circular curve at different heights relative to a common reference plane;

- a plurality of substantially vertical compression members located on each of said hoop-like tension members, wherein compression members located on a first hoop-like tension member and a proximal pair of compression members on an adjacent tension member form, in plan, the vertices of substantially isosceles triangles;



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-41-

REPLACEMENT SHEET

11 MAR 1997

a plurality of nodes located on said outer compression member wherein said nodes located on said outer compression member and a proximal pair of compression members on an outermost hoop-like tension member form, in plan, the vertices of substantially isosceles triangles;

a plurality of tension elements interconnecting each compression member on said first hoop-like tension member to said proximal pair of compression members on said adjacent hoop-like member; and

means for interconnecting compression members on said outermost hoop-like tension member to said proximal pair of nodes on said compression member.

50. The triangulated structure of claim 49 wherein said non-circular curve is discontinuous.

51. The triangulated structure of claim 50 wherein the radius of said first and second pair of circular arcs is the same.

52. The triangulated structure of claim 49 wherein said non-circular curve is continuous.

53. A triangulated cable arrangement for supporting a roof comprising:

an inner tension member;

a plurality of substantially horizontal tension hoops concentrically arranged about said inner tension member at different heights relative to a common reference plane;

a plurality of substantially vertical compression members having upper and lower ends, defining upper and lower nodes, affixed at their lower



* C L M S *

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

ends to one of said tension hoops, wherein each compression member located on a first tension hoop and a proximal pair of compression members on an adjacent tension hoop form, in plan, the vertices of a substantially isosceles triangle;

a plurality of tension elements interconnecting a first compression member affixed to said first tension hoop to said proximal pair of compression members affixed to said adjacent tension hoop, said tension elements including:

a pair of upper tension members extending from the upper node of said compression member affixed to said first tension hoop to the upper nodes of each of said proximal pair of compression members affixed to said adjacent tension hoop; and

a pair of diagonal tension members extending from said upper node of said compression member affixed to said first tension hoop to the lower nodes of each of said proximal pair of compression members affixed to said adjacent tension hoop;

means for securing an innermost tension hoop and the compression members attached thereto to said inner tension member;

an outer compression member;

a plurality of nodes located on said outer compression member; and


a plurality of tension elements interconnecting an outermost tension hoop and the



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

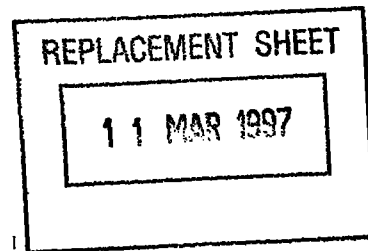

compression members attached thereto to said nodes on said outer compression member.

54. The triangulated cable arrangement of claim 53 wherein the roof projects in plan a substantially closed triangle.

55. The triangulated cable arrangement of claim 54 wherein said nodes on said outer compression member are located on a substantially closed, discontinuous triangular curve comprising three circular arcs.


56. The triangulated cable arrangement of claim 55 wherein the centers of said circular arcs are located on meridians joining each vertex of said triangular curve with a middle point of the opposite side of said triangle.

57. The triangulated cable arrangement of claim 56 wherein nodes are located at each vertex of said triangle.

58. The triangulated cable arrangement of claim 57 wherein nodes on said outer compression member are evenly spaced.



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1997

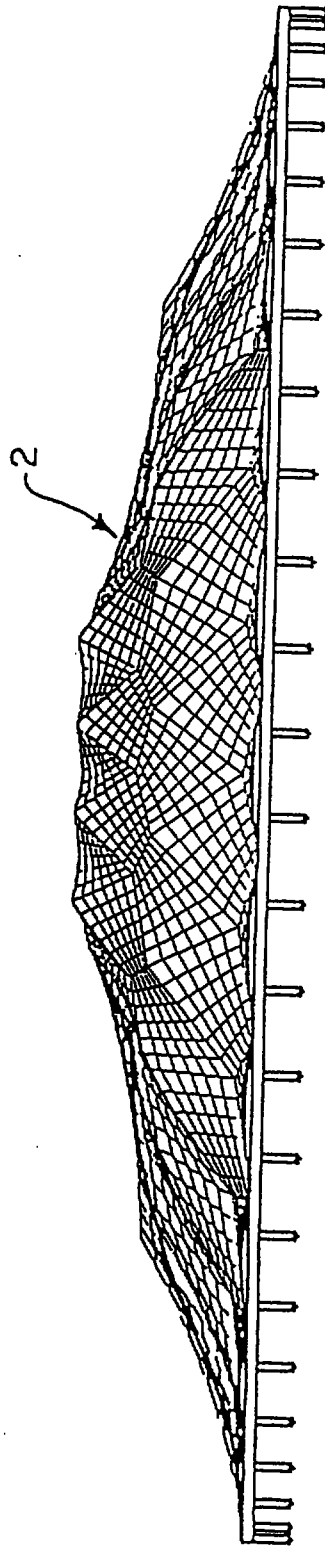


FIG. 1

SUBSTITUTE SHEET

REPLACEMENT SHEET

11 MAR 1997

2

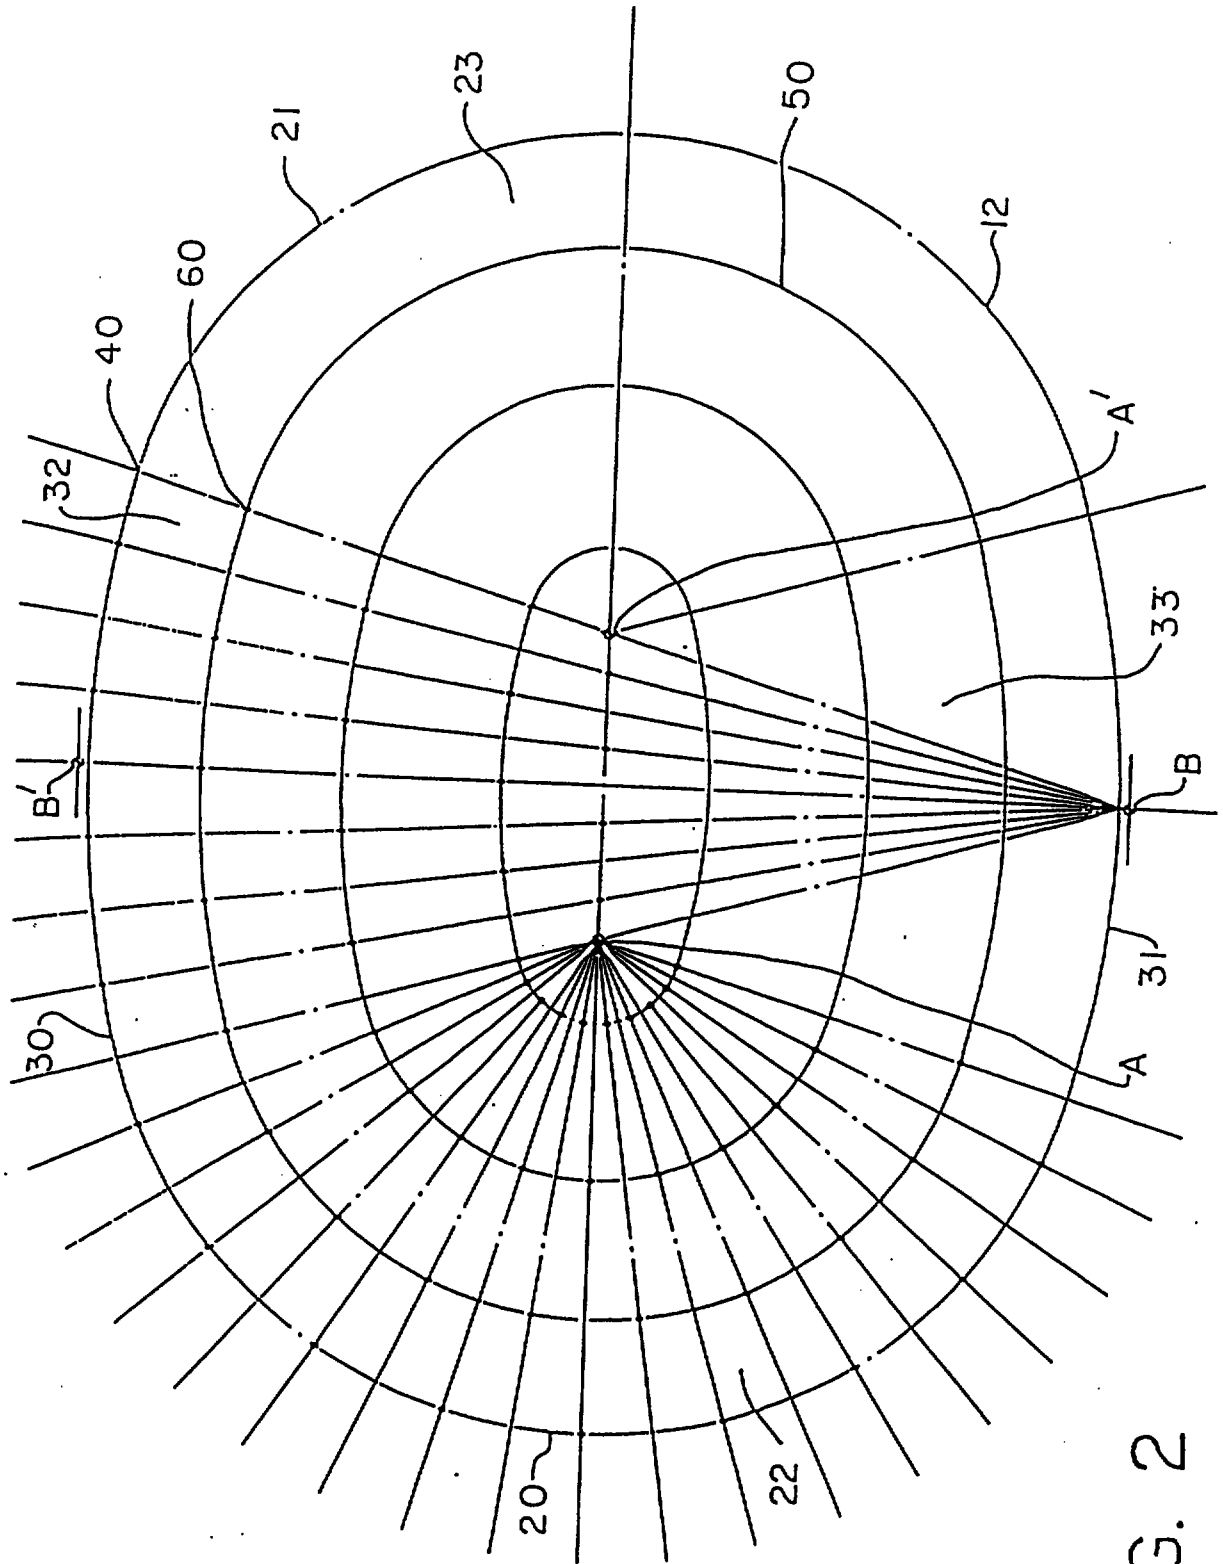


FIG. 2

SUBSTITUTE SHEET

REPLACEMENT SHEET

11 MAR 1997

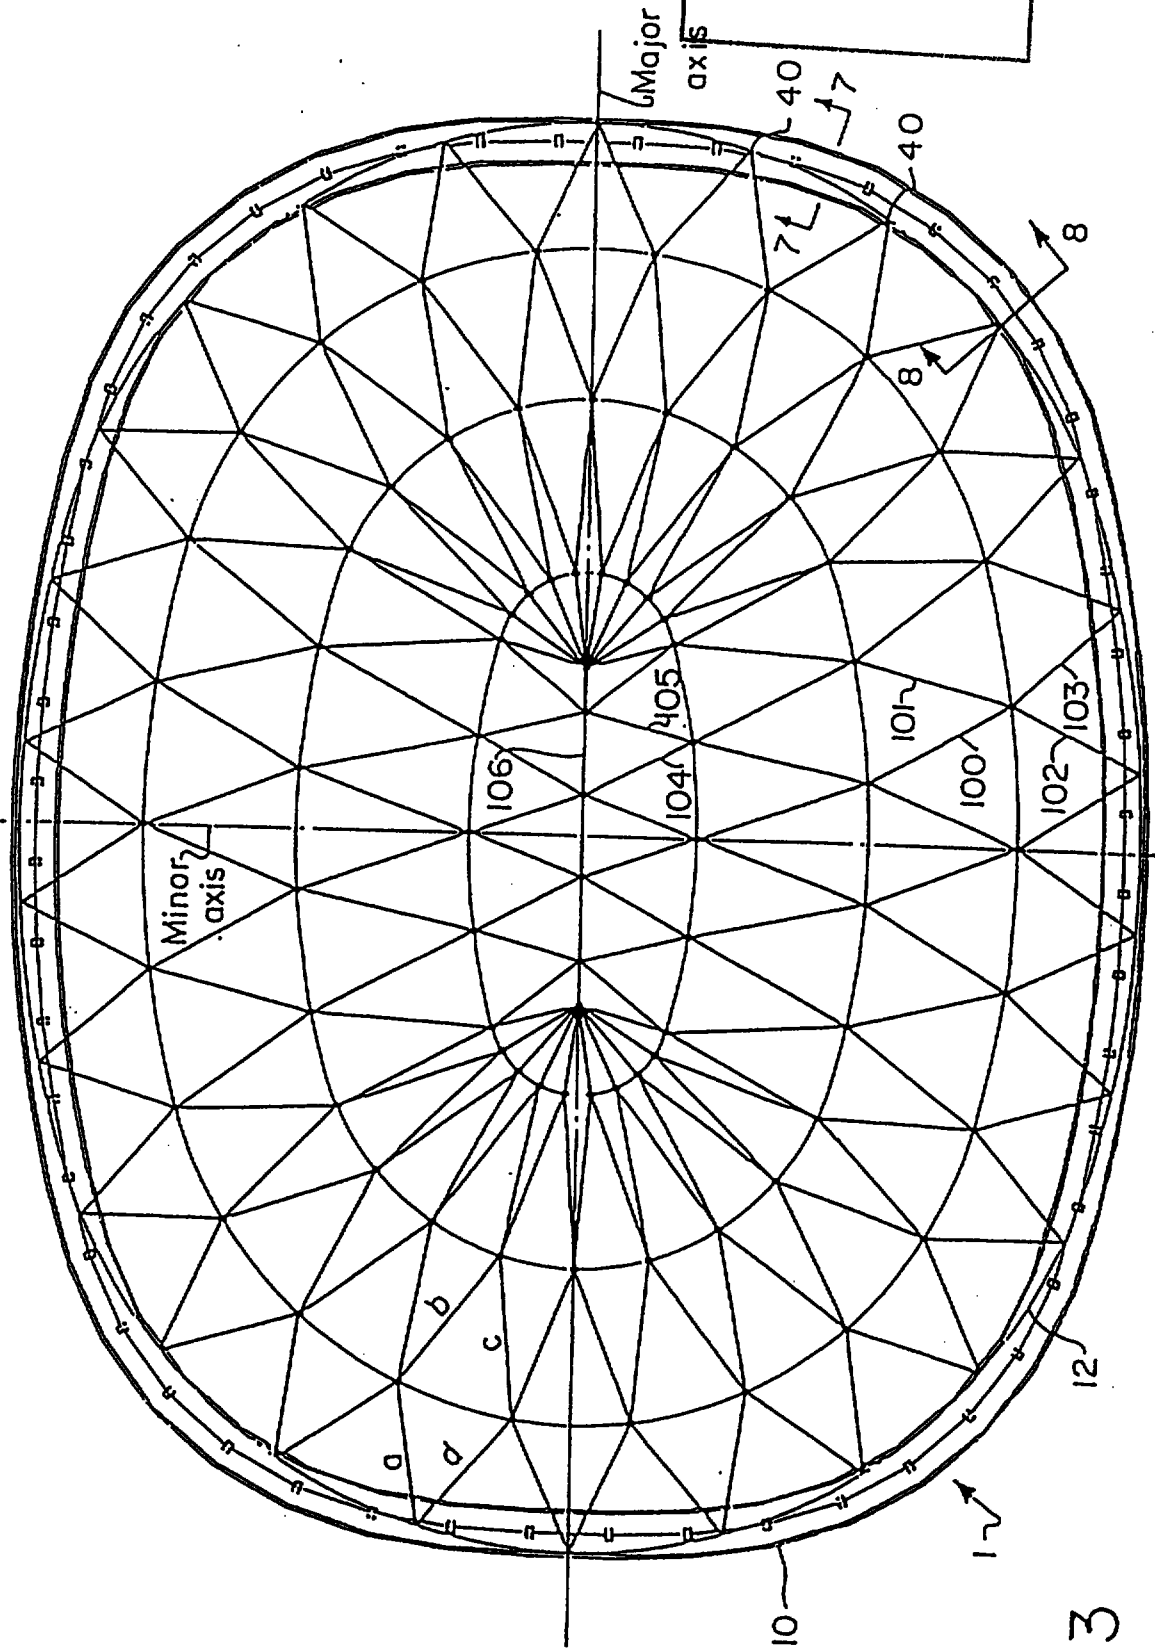


FIG. 3

REPLACEMENT SHEET

11 MAR 1997

4


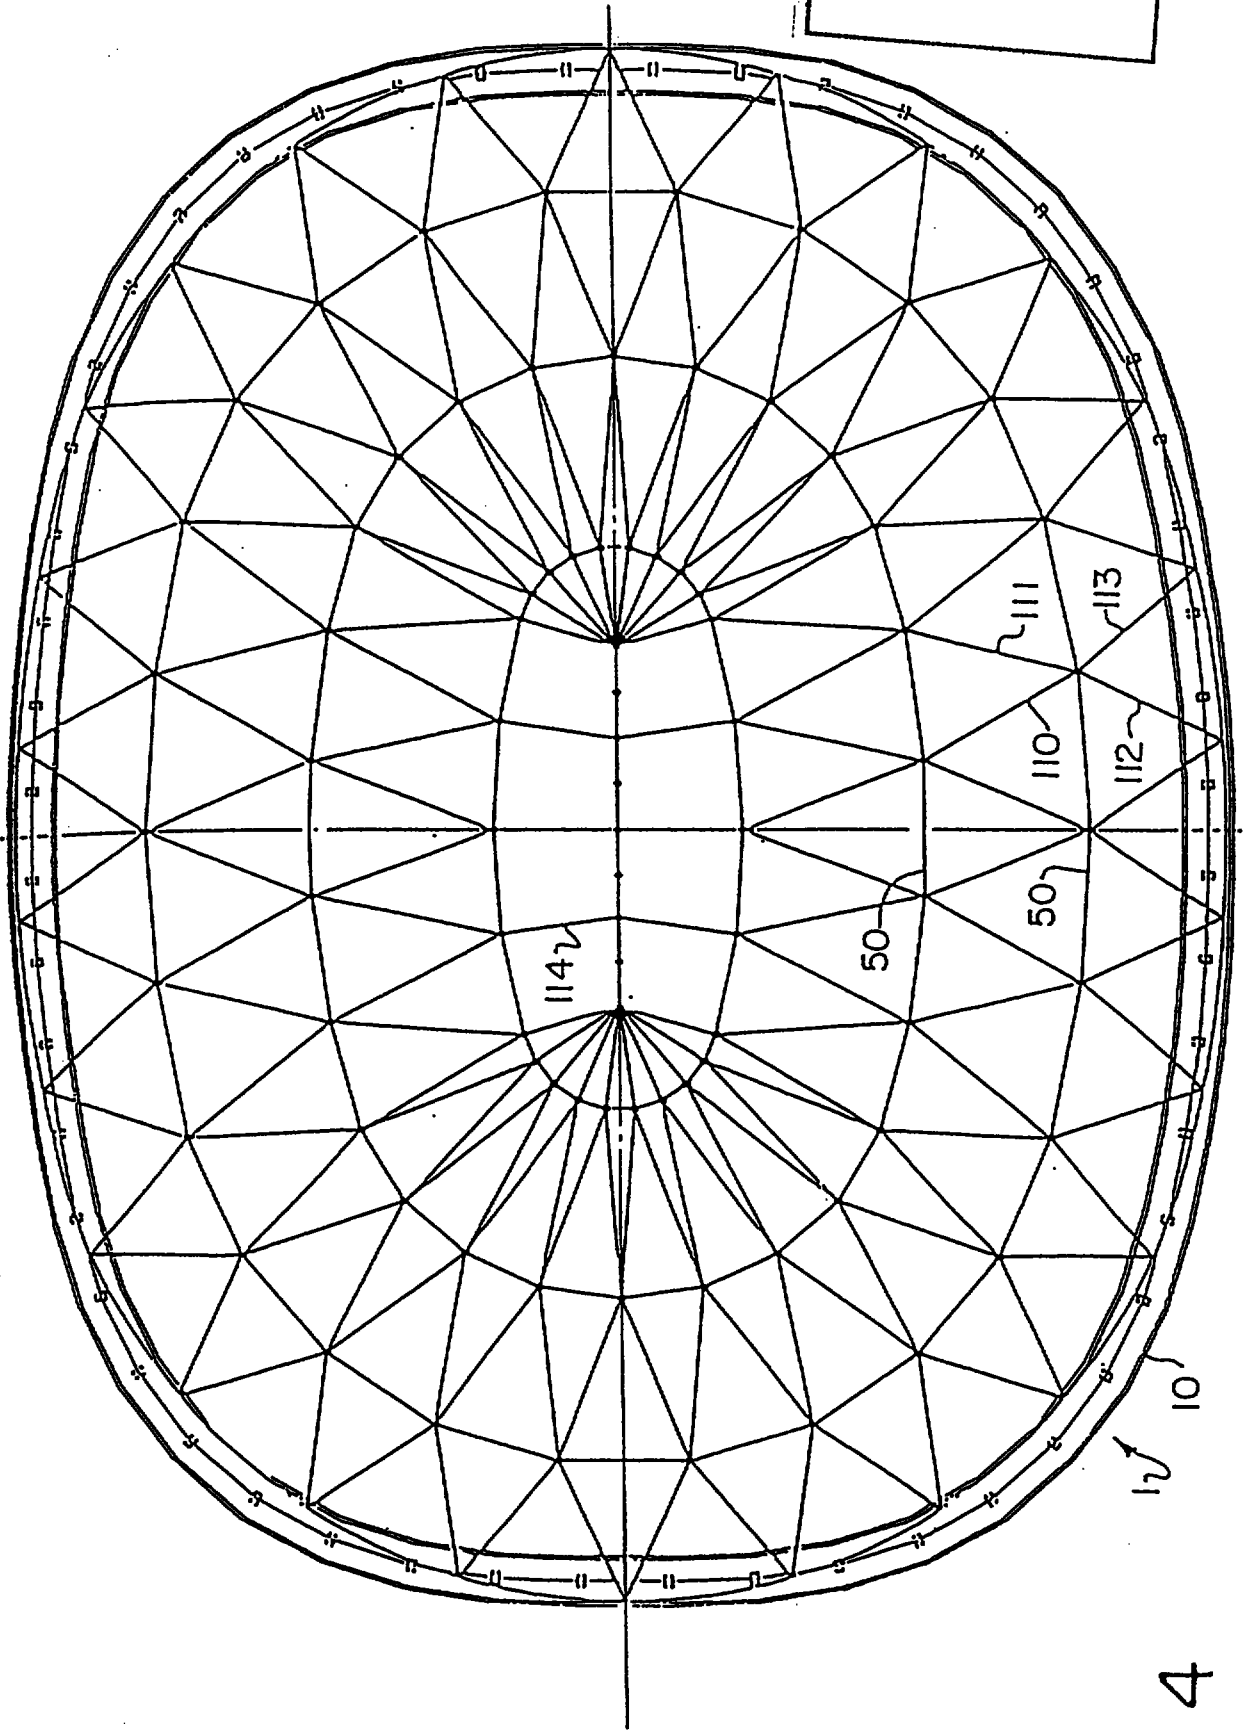


FIG. 4

REPLACEMENT SHEET

11 MAR 1997

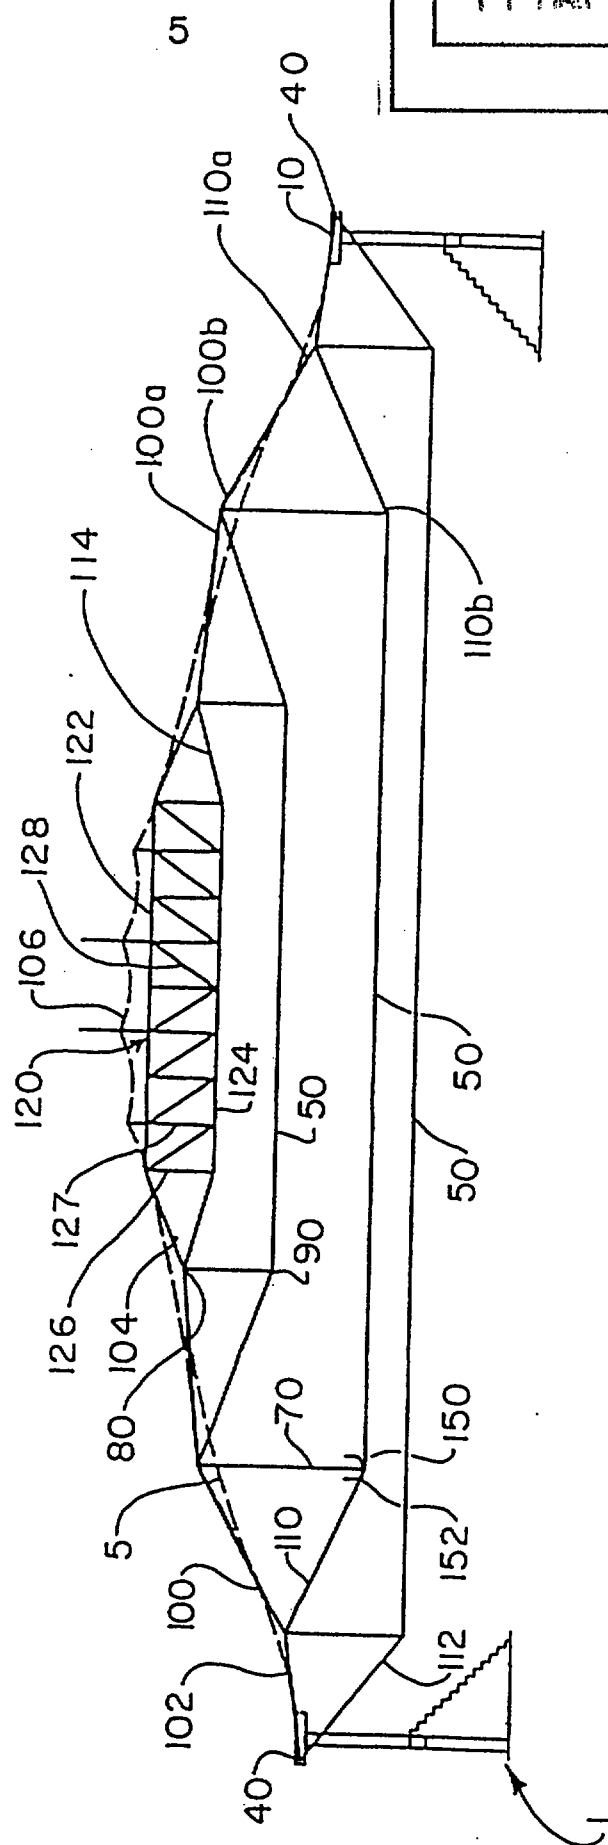

56E

11 MAR 1997

6

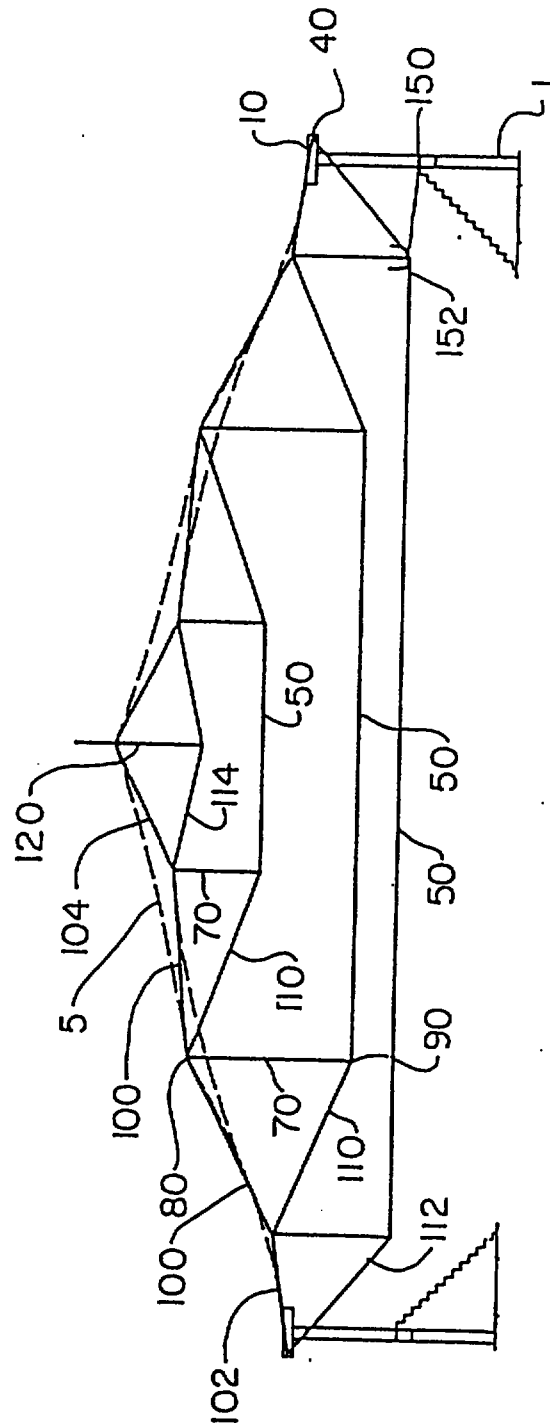


FIG. 6

REPLACEMENT SHEET

11 MAR 1997

7

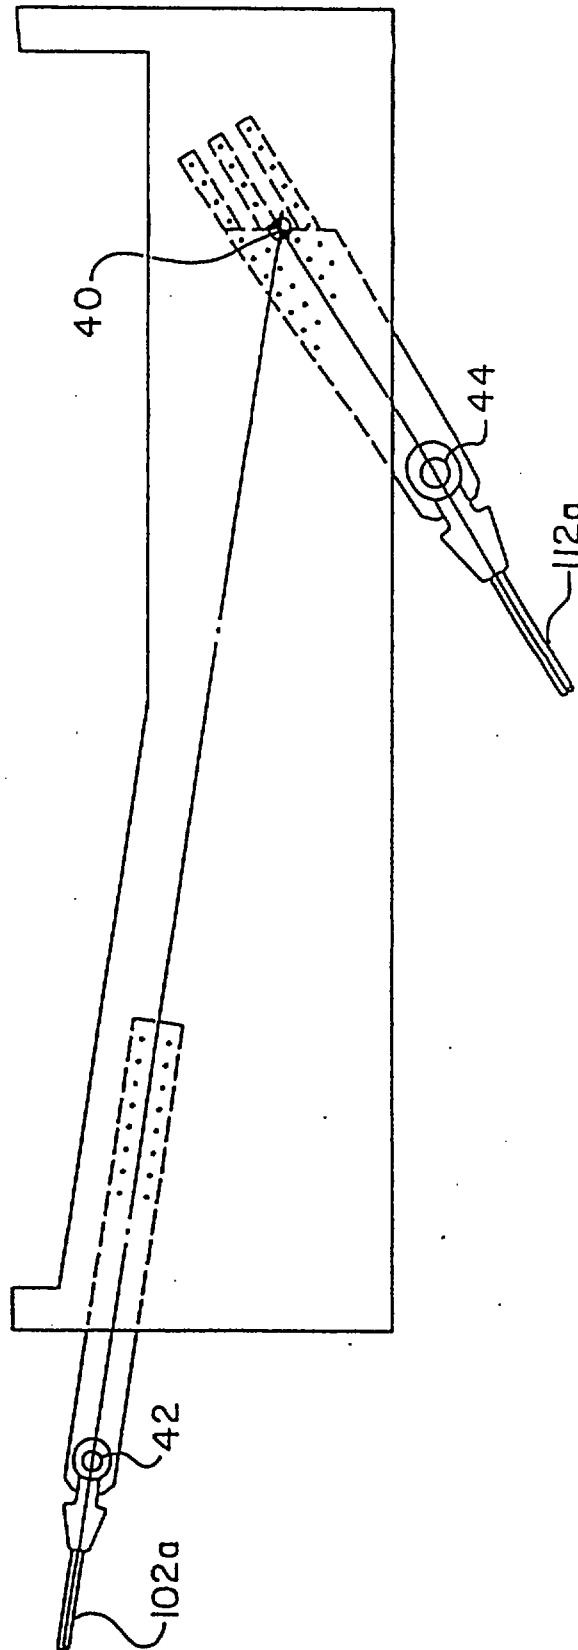


FIG. 7

REPLACEMENT SHEET

11 MAR 1997

8

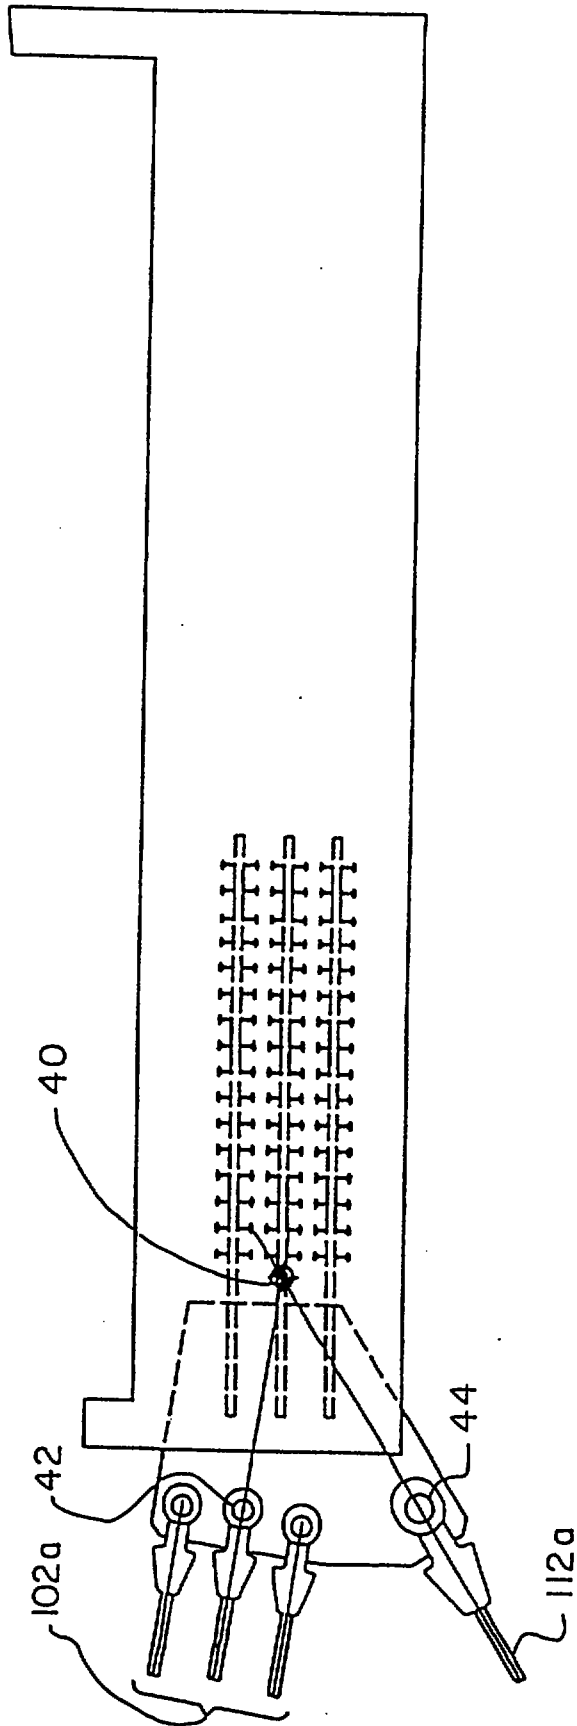


FIG. 8

REPLACEMENT SHEET

11 MAR 1997

9

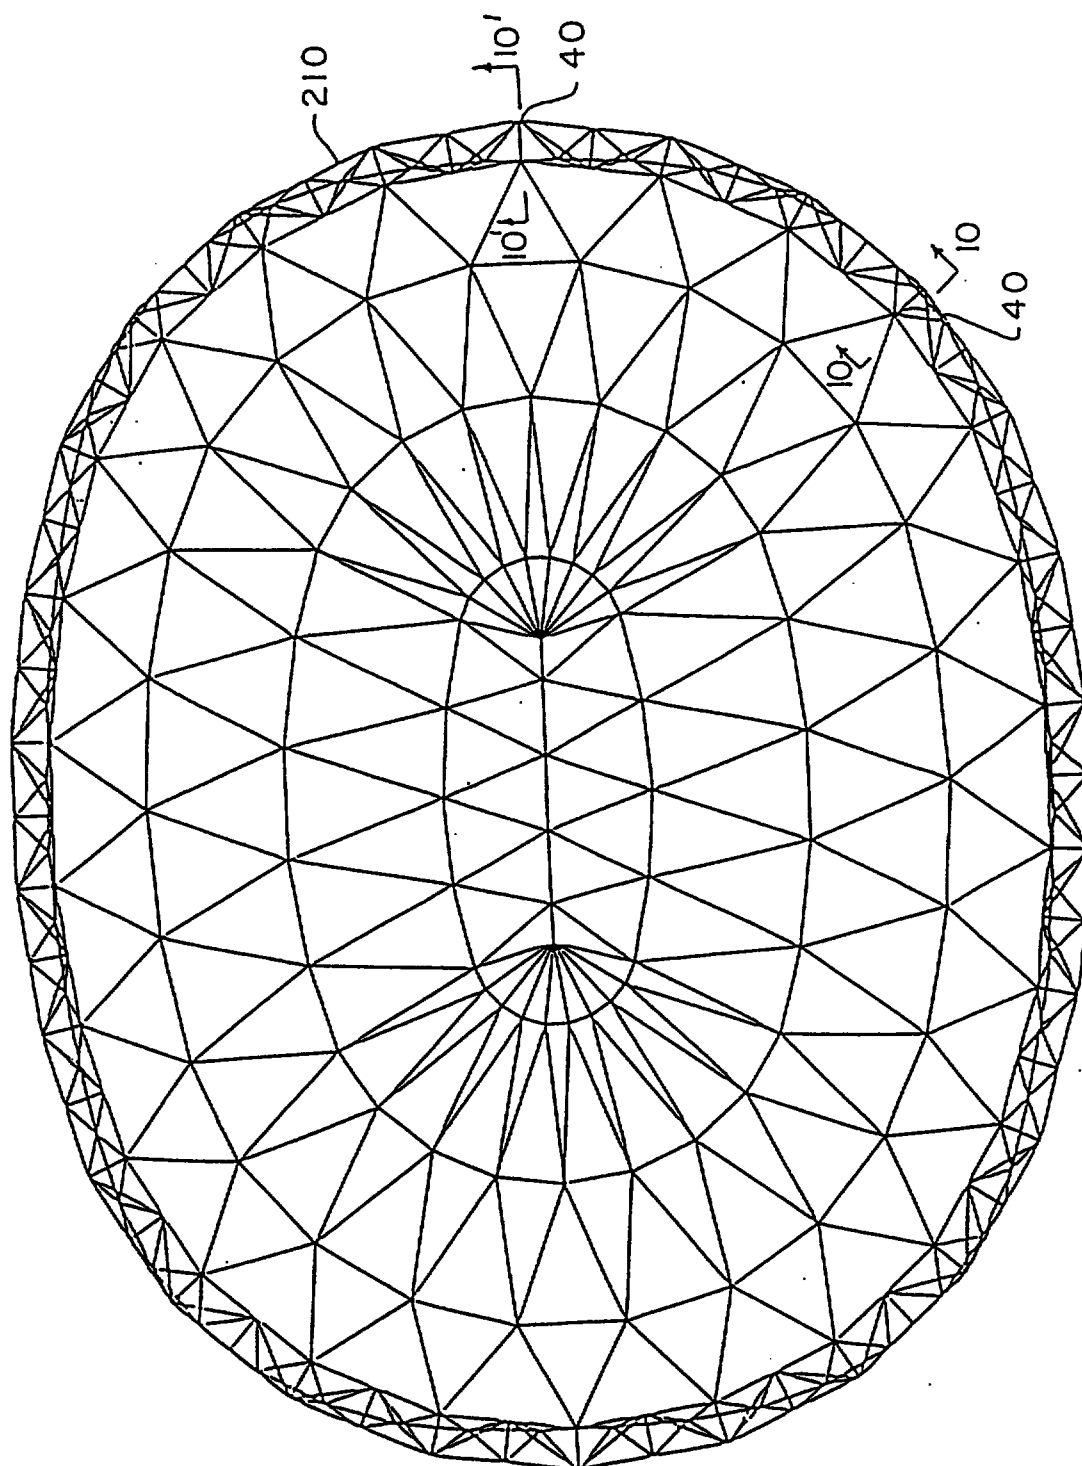


FIG. 9

REPLACEMENT SHEET

11 MAR 1997

10

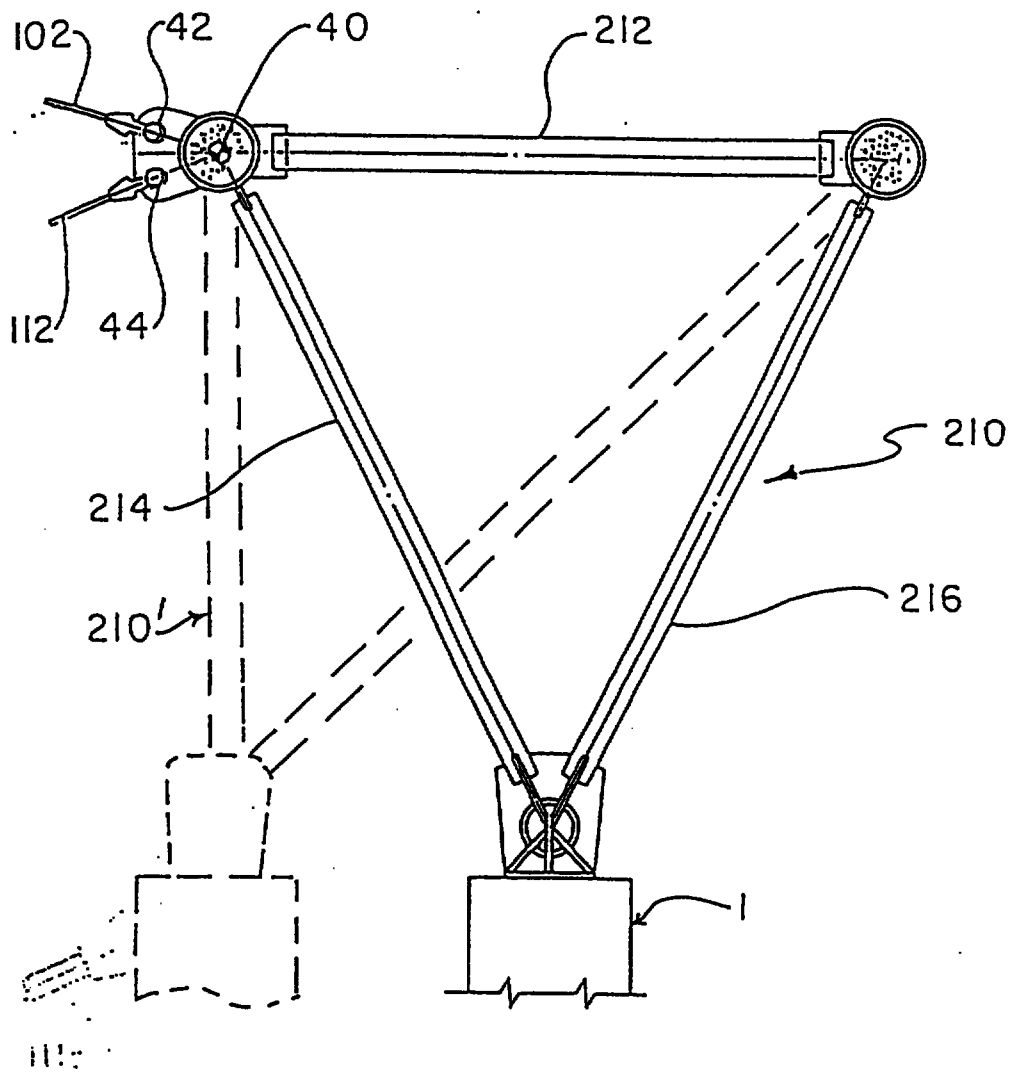


FIG. 10

11 MAR 1997

11

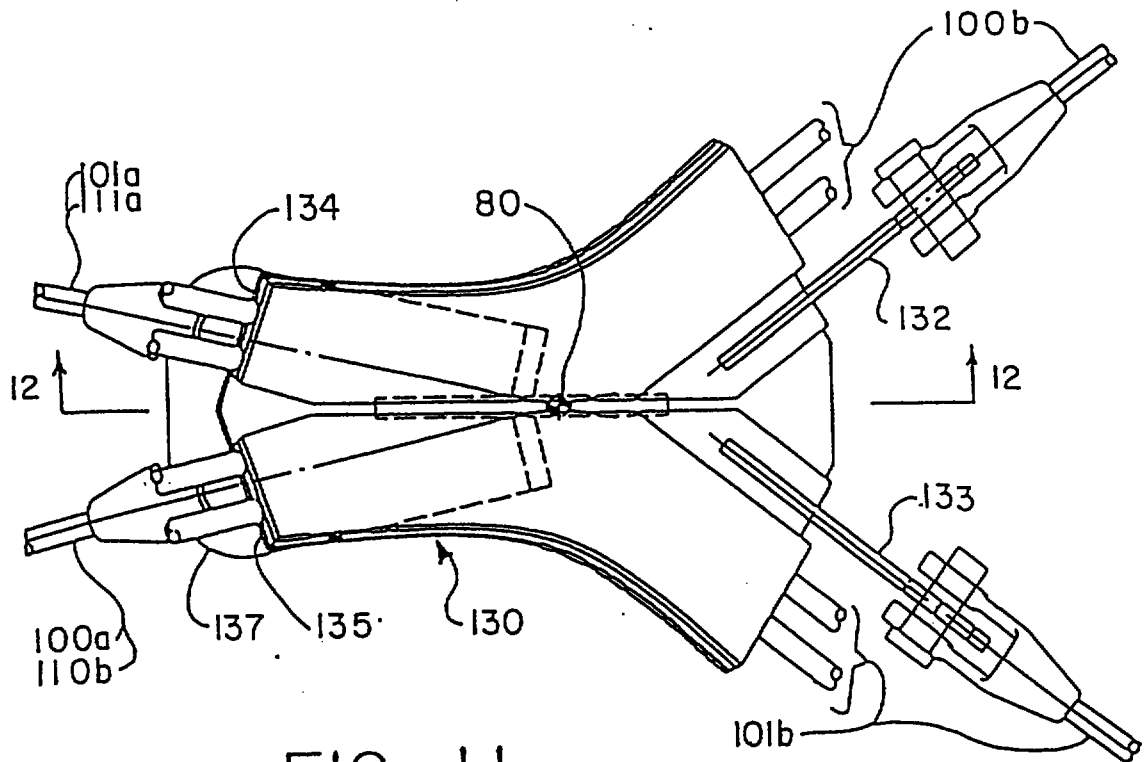


FIG. 11

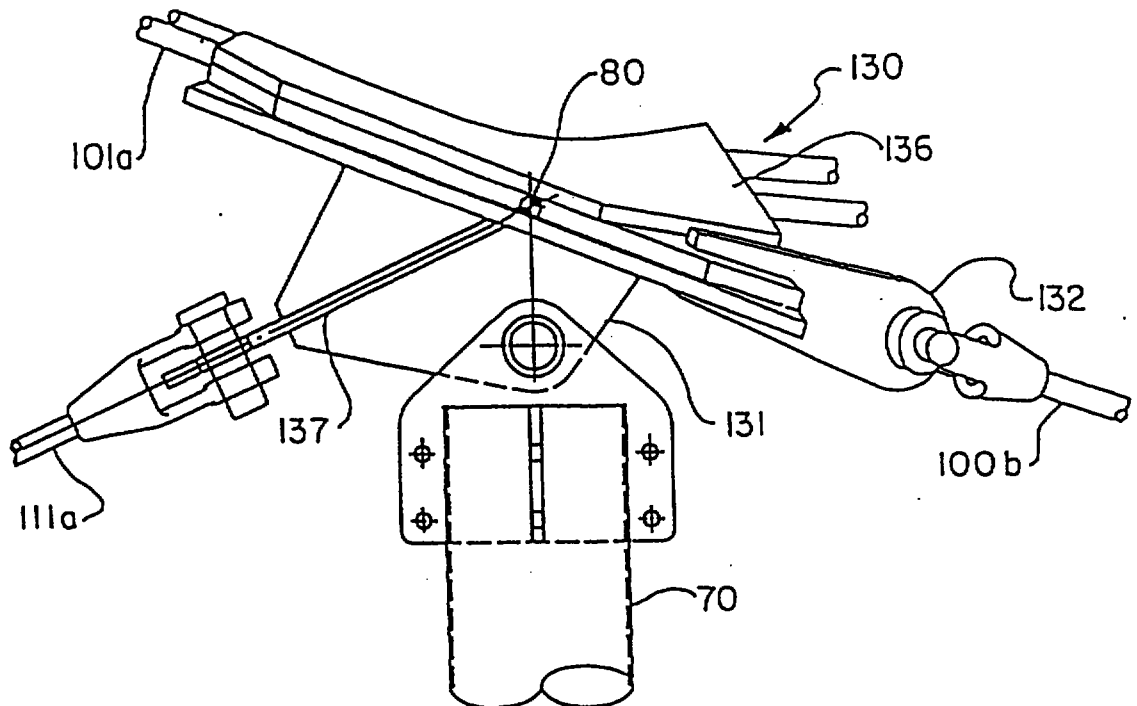


FIG. 12

REPLACEMENT SHEET

11 MAR 1997

12

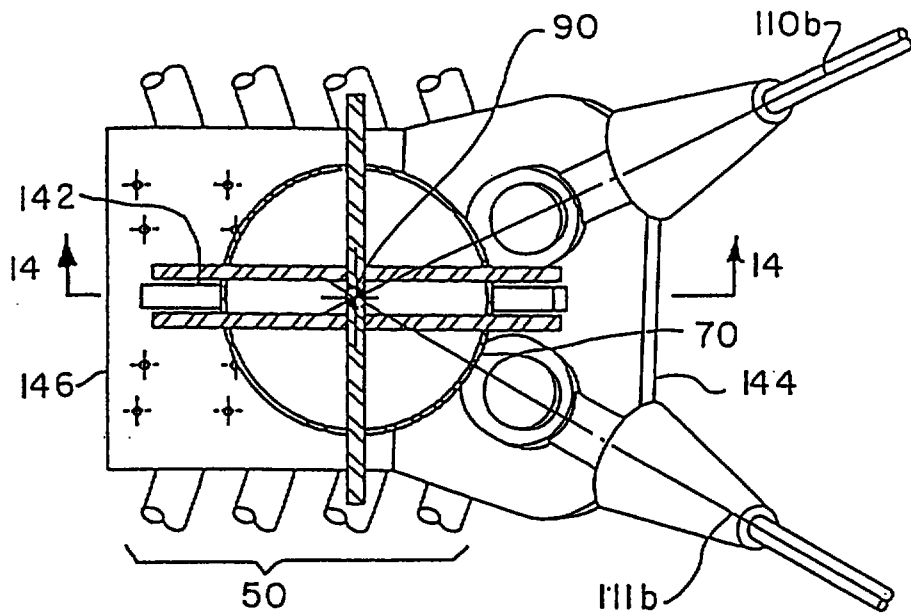


FIG. 13

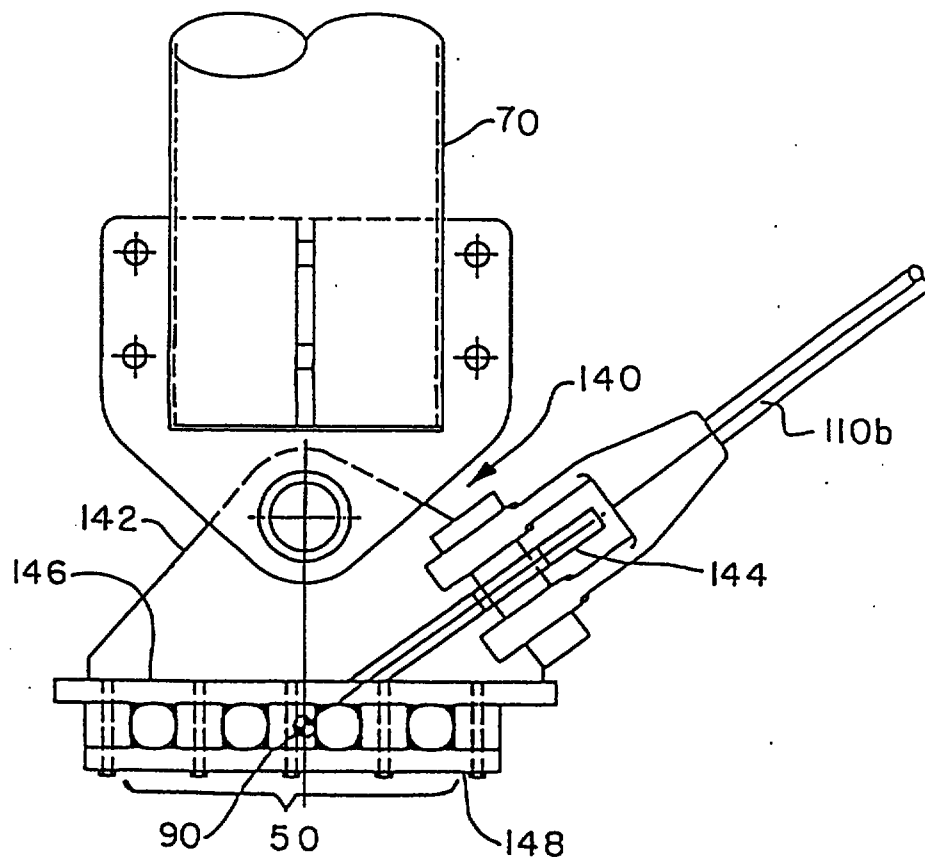


FIG. 14

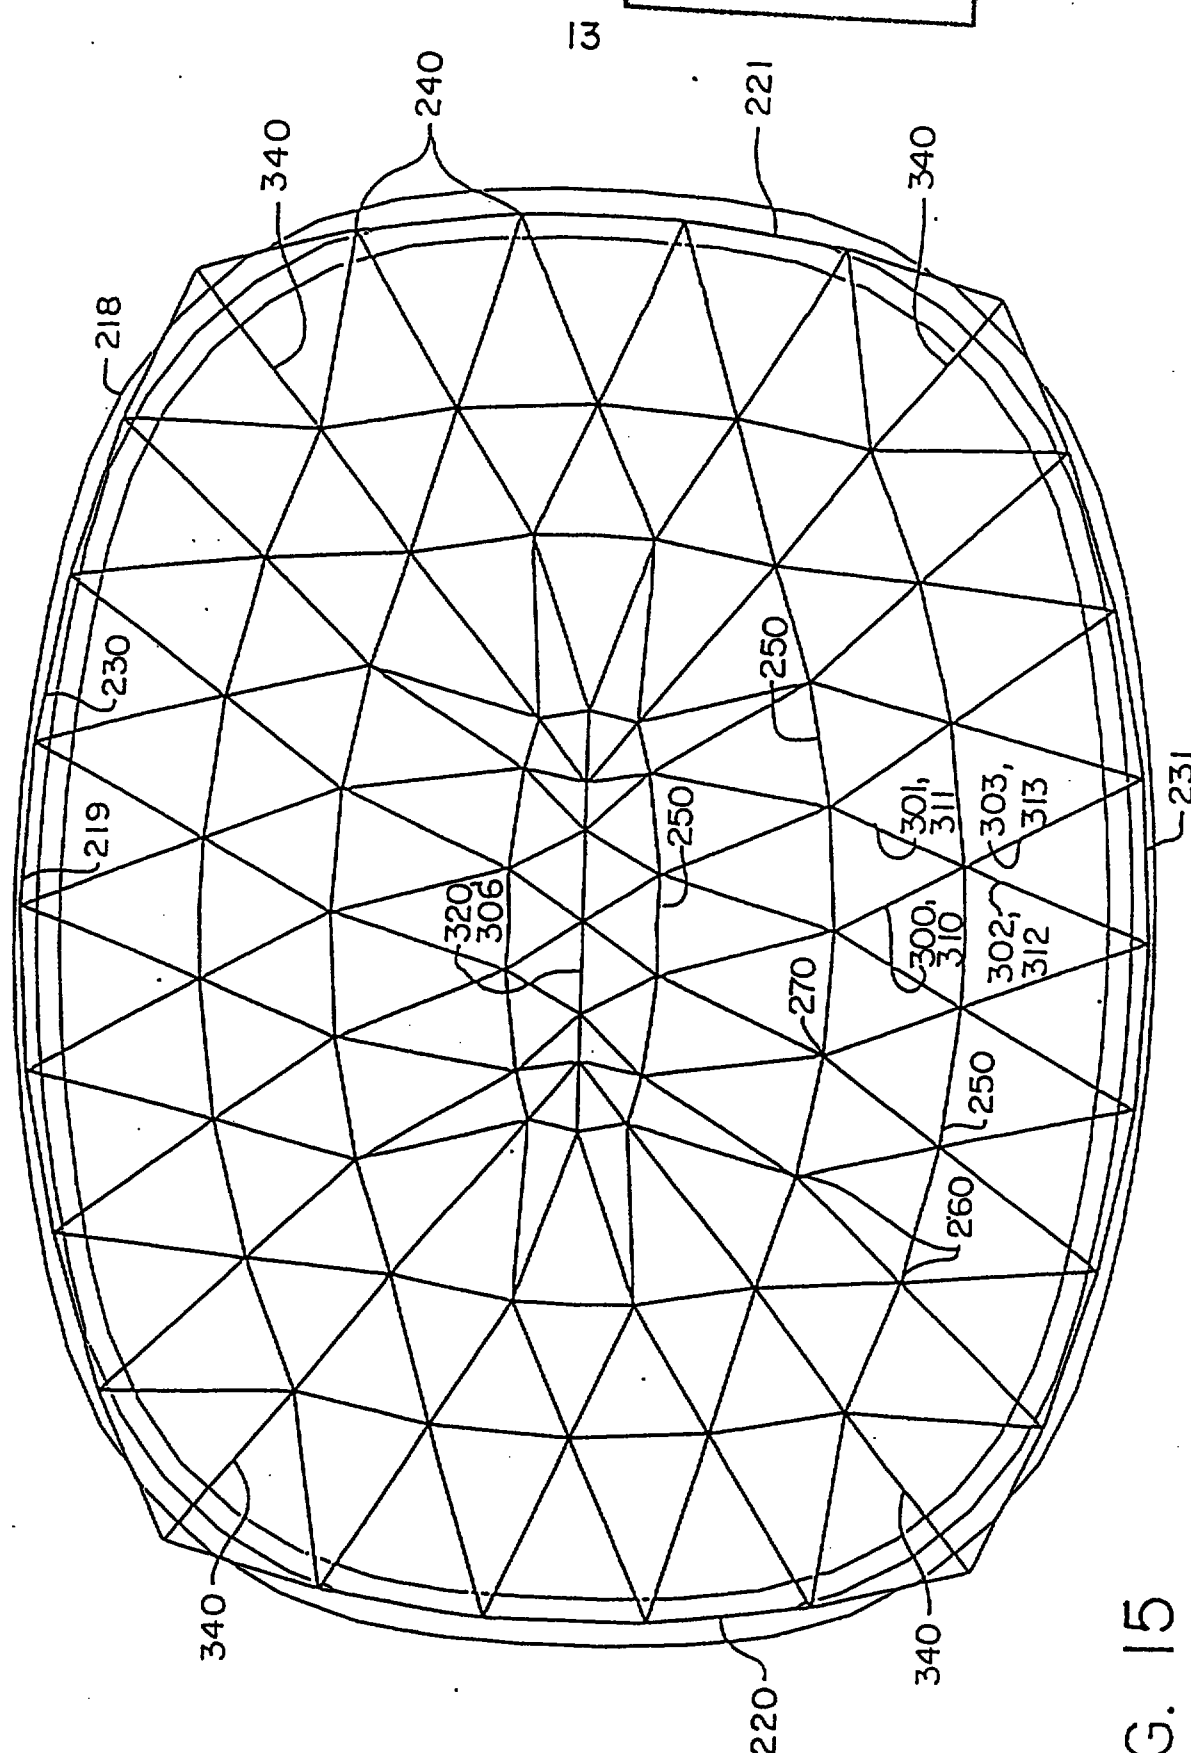


FIG. 15

REPLACEMENT SHEET

11 MAR 1997

14.


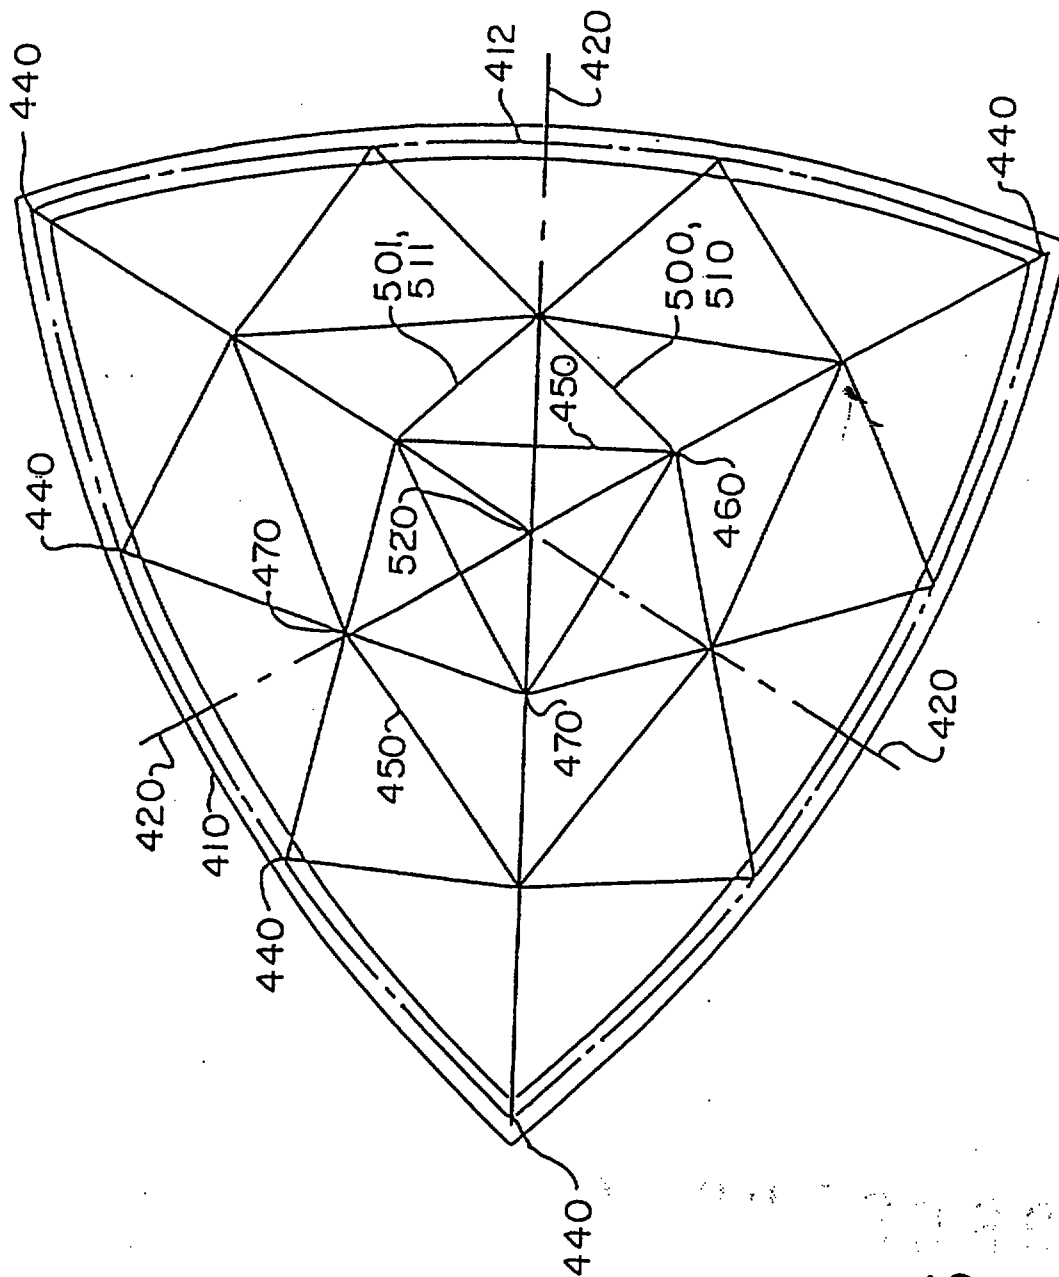


FIG. 16

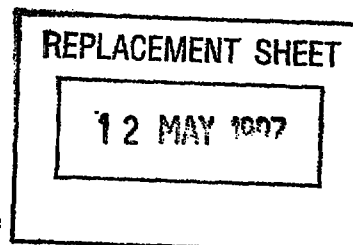

non-circular perimeter of the underlying structure. To complete the triangulated structure, the present invention also includes a plurality of tension elements for interconnecting compression members affixed to an innermost hoop-like tension member to the cable truss. A flexible membrane overlays the tension elements and is attached to the upper nodes of the compression members to form a roof for the underlying structure.

As described above, I have devised a triangulated roof structure for a non-circular underlying building structure in which the plan of the roof structure closely approximates the underlying building structure. In this manner, substantial economy in constructing the triangulated structure is achieved by reducing the variety of unique upper and lower node details that would otherwise occur at the interconnections of each compression member on a first hoop-like tension member to a proximal pair of compression members on an adjacent hoop-like tension member. Since the variety of unique node details is reduced, the same or similar node configurations can be used at a number of upper and lower ends of the compression members throughout the structure.

Brief Description Of The Drawings

These and other objects, features and advantages of my invention will be more readily apparent from the following detailed description of a preferred embodiment of the invention in which:

FIG. 1 is a side elevation view of a roof structure in accordance with one embodiment of the present invention;

FIG. 2 is a top plan view useful in understanding the present invention;



21 APR 1999

REPLACEMENT SHEET

5

lacks a degree of lateral stability at the top radial chord of the dome and therefore relies on the flexible membrane for stiffness. Furthermore, due to the radial arrangement of the support members, this structure is only appropriate for use in circular stadiums. Most stadiums or arenas are, however, non-circular.

Yet another circular cable dome system is illustrated in US Patent No 4,757,650 to Berger. Like the system of Geiger ('553), described above, Berger's dome is not triangulated. Also like Geiger, Berger's dome comprises a plurality of radially oriented support members. In particular, Berger's support members include an edge ring, which forms the shape of the dome in plan. The edge ring is supported on columns and includes several nodes. A series of supporting lower and upper cables are attached at their ends to spaced apart nodes on the edge ring, so that the cables cross each other when viewed in plan. Vertical support struts are attached on their lower and upper ends to the lower and upper cables, respectively. More specifically, the struts are positioned where the cables cross each other, which is radially inward from the edge ring. As a result, the placed struts form the shape, when viewed in plan, of a first inner ring concentric to the edge ring. Each of these struts also includes nodes to which additional lower and upper cables may be attached. Subsequent inner rings may be formed by attaching these cables to spaced apart nodes on the struts of the first inner ring and positioning additional vertical struts between the upper and lower cables radially inward from the first inner ring to form a second inner ring. This placement of cables and struts may continue until the desired number of support rings and corresponding cable supports have been constructed. However, like Geiger's dome, Berger's radial arrangement of the support members is not appropriate for non-circular buildings.

Roof structures have been developed to support a roof for such non-circular buildings. For example, US Patent No. 3,841,038 to Geiger relates to a non-circular roof

21 APR 1999

structure which defines an enclosed building space, including a ring which projects in plan substantially to a closed curve having major and minor axes and a plurality of skewed axes of symmetry. In this roof structure, a plurality of sets of rigid arches are connected to the ring to form the roof, with the arches of at least two sets respectively extending in plan substantially parallel to a separate one of the skewed axes of symmetry of the closed curve, and the arches of another set extending in plan substantially parallel to the major or minor axis of the closed curve. These arches impose a funicular load on the ring and support a roof deck structure to form a domed surface.

This structure, while applicable to non-circular structures is unnecessarily complicated, requiring at some points the intersection of up to six arches. This causes extremely complicated attachments at these intersections. Also, this structure is constructed with rigid arches and, therefore, does not efficiently use the tensile strength of building materials and may also result in a roof structure having a high aspect ratio.

Because of the drawbacks highlighted above none of these prior art roof structures efficiently utilize a triangulated arrangement of tension members

REPLACEMENT SHEET

21 APR 1999

- 7 -

REPLACEMENT SHEET

and compression members to construct a roof adaptable to a variety of non-circular underlying arenas.

Summary Of The Invention

I have devised a roof structure for a non-circular underlying building structure, such as a stadium, arena or the like, which overcomes the disadvantages and shortcomings of the above-mentioned prior art structures when such structures are applied to non-circular stadiums. Specifically, I have devised a triangulated roof structure for a non-circular underlying structure which reduces the degree of complication of the joint details by approximating the shape of the underlying structure with a series of circular arcs. This triangulated arrangement provides greater redundancy and is better able to handle the nonsymmetric loading conditions which such structures typically encounter.

In accordance with the present invention, a triangulated cable arrangement is disclosed for supporting a roof that projects in plan a closed non-circular curve. The roof defines an enclosed area for an underlying building space having a non-circular perimeter including major and minor axes. The roof structure includes an outer compression ring having a plan which substantially matches the perimeter of the underlying building. A non-circular curve is constructed on the compression ring, using a plurality of circular arcs, which closely approximates the non-circular perimeter of the underlying building space.

The triangulated structure of the present invention also includes a plurality of hoop-like tension members which are concentrically arranged within the non-circular curve at different heights relative to a common reference plane. A plurality of

REPLACEMENT SHEET

21 APR 1999

- 8 -

REPLACEMENT SHEET

vertical compression members or posts, having upper and lower ends, are affixed at their lower ends at spaced-apart locations on each of the hoop-like tension members. The upper and lower ends of the compression members define upper and lower attachment points or nodes, respectively. The compression members are located on each of these hoop-like tension members, such that each compression member located on a first hoop-like tension member and a proximal pair of compression members on an adjacent hoop-like tension member form, in projection on the plan, the vertices of a substantially isosceles triangle. Similarly, attachment points or nodes are located on the non-circular curve constructed on the outer compression ring such that each node located on the compression ring and a proximal pair of compression members located on an outermost hoop-like tension member also form, in plan, the vertices of a substantially isosceles triangle.

The structure further includes a plurality of tension elements interconnecting each compression member on a first hoop-like tension member to a proximal pair of compression members on an adjacent hoop-like tension member. Tension elements are also provided for interconnecting each compression member on the outermost hoop-like tension member to a proximal pair of nodes on the outer compression ring.

In this manner, the structure, when viewed in plan, appears as a plurality of substantially isosceles triangles arranged within the non-circular curve constructed on the compression ring. Accordingly, the structure is triangulated.

In accordance with another important aspect of the present invention, a tension member, such as a cable truss, is provided along the major axis of the

21 APR 1999

non-circular perimeter of the underlying structure. To complete the triangulated structure, the present invention also includes a plurality of tension elements for interconnecting compression members affixed to an innermost hoop-like tension member to the cable truss. A flexible membrane overlays the tension elements and is attached to the upper nodes of the compression members to form a roof for the underlying structure.


As described above, I have devised a triangulated roof structure for a non-circular underlying building structure in which the plan of the roof structure closely approximates the underlying building structure. In this manner, substantial economy in constructing the triangulated structure is achieved by reducing the variety of unique upper and lower node details that would otherwise occur at the interconnections of each compression member on a first hoop-like tension member to a proximal pair of compression members on an adjacent hoop-like tension member. Since the variety of unique node details is reduced, the same or similar node configurations can be used at a number of upper and lower ends of the compression members throughout the structure.

Brief Description Of The Drawings

These and other objects, features and advantages of my invention will be more readily apparent from the following detailed description of a preferred embodiment of the invention in which:

FIG. 1 is a side elevation view of a roof structure in accordance with one embodiment of the present invention;

FIG. 2 is a top plan view useful in understanding the present invention;

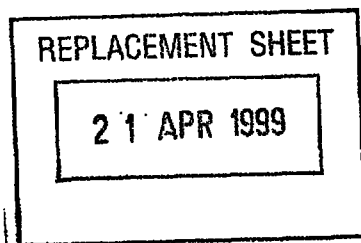

- 10 -

REPLACEMENT SHEET

FIG. 3 is a top plan view depicting an upper set of tension elements used in a preferred embodiment of the invention;

FIG. 4 is a plan view similar to FIG. 3 depicting a set of diagonal tension elements and three hoop-like tension elements used in a preferred embodiment of the invention;

FIG. 5 is a view along the major axis of the non-circular curve in FIG. 3;

FIG. 6 is a view along the minor axis of the non-circular curve of FIG. 3;

FIG. 7 is a section taken through one node on the compression ring, at line 7-7 of FIG. 3;

FIG. 8 is a section taken through another node on the compression ring, at line 8-8 of FIG. 3;

FIG. 9 is a top plan view similar to FIG. 3 depicting an alternate compression ring comprising a triangular truss;

FIG. 10 is a section through lines 10-10 and 10'-10' of FIG. 9;

FIG. 11 is a top plan view of an upper node of a compression member;

FIG. 12 is a section through line 12-12 of FIG. 11;

FIG. 13 is a top plan view of a lower node of a compression member;

FIG. 14 is a section through line 14-14 of FIG. 13;

FIG. 15 is a top plan view depicting an alternate embodiment of the roof structure shown in FIGS. 3 and 4; and

FIG. 16 is a top plan view of another embodiment of the present invention.

21 APR 1999

Detailed Description Of The Preferred Embodiment

FIG. 1 illustrates, in side elevation view, a preferred embodiment of a triangulated roof structure, generally designated by the numeral 2, designed in accordance with my invention. Roof structure 2 defines an enclosed area for an underlying building space having a non-circular perimeter. Roof structure 2 includes a flexible membrane constructed from a plurality of diamond shaped panels, which provides a roof for the enclosed space. Cross-sections and plan views of this triangulated roof are shown in FIGS. 2-6.

FIG. 2 illustrates one non-circular configuration for which the present invention may be used, including a compression ring 10 having a non-circular plan which substantially matches the perimeter of an underlying building space 1 having major and minor axes. Constructed on compression ring 10 is a non-circular curve 12 which comprises a plurality of circular arcs. Non-circular curve 12 includes a first pair of circular arcs 20, 21 having their centers A, A' on the major axis of the non-circular curve formed by the perimeter of underlying building structure 1. Centers A, A' of circular arcs 20, 21 are equidistant from the minor axis and on opposite sides. Circular arcs 20, 21 form end sectors 22, 23 for the area enclosed by non-circular curve 12. Non-circular curve 12 further includes a second pair of circular arcs 30, 31 having centers B, B' located on the minor axis of the non-circular curve formed by the perimeter of underlying building structure 1. Centers B, B' of circular arcs 30, 31 are equidistant from the major axis and on opposite sides. Circular arcs 30, 31 form intermediate segments 32, 33. As shown in FIG. 2, first pair of circular arcs 20, 21 and second pair of circular arcs 30, 31 intersect to form non-circular

REPLACEMENT SHEET

21 APR 1999

- 12 -

REPLACEMENT SHEET

curve 12. Similarly, end sectors 22, 23 combine with intermediate segments 32, 33 to form the area enclosed by non-circular curve 12.

A plurality of hoop-like tension members 50 are concentrically arranged within non-circular curve 12 at different heights relative to a common plane. Vertical compression members 70, having upper and lower ends, are attached at their lower ends to each tension member 50 at spaced-apart locations 60 on the tension member. The upper ends of compression members 70 define upper attachment points or nodes 80 and the lower ends define lower attachment points or nodes 90. Compression members 70 are located on each hoop-like tension member 50 such that a compression member 70 on a first hoop-like tension member 50 and a proximal pair of compression members 70 on an adjacent hoop-like tension member 50 form, in plan, the vertices of a substantially isosceles triangle. Similarly, attachment points (or nodes) 40 are located on outer compression ring 10 such that a node 40 located on outer compression ring 10 and a proximal pair of compression members 70 on an outermost hoop-like tension member 50 form, in plan, the vertices of a substantially isosceles triangle.

Nodes 40 on compression ring 10, lying within end sectors 22, 23 are located at the intersections of non-circular curve 12 with alternating ones of a plurality of radial lines drawn in end sectors 22, 23 through centers Λ , Λ' of circular arcs 20, 21, respectively. Similarly, compression members 70 on hoop-like tension members 50, lying within end sectors 22, 23 are located at the intersections of alternating ones of hoop-like tension members 50, with alternating ones of the above-mentioned plurality of radial lines

21 APR 1999

drawn through centers Λ , Λ' of circular arcs 20, 21, respectively.

In similar fashion, nodes 40 on compression ring 10, lying within intermediate segments 32, 33 are located at the intersections of non-circular curve 12 with alternating ones of a plurality of radial lines drawn in intermediate segments 32, 33 through centers B, B' of circular arcs 30, 31, respectively. Compression members 70 on hoop-like tension members 50, lying within intermediate segments 32, 33 are located at the intersections of alternating ones of hoop-like tension members 50 with alternating ones of the above plurality of radial lines drawn through centers B, B' of circular arcs 30, 31. In this manner, the triangulated geometry of the present invention is adapted to a wide range of non-circular perimeters to accommodate an underlying structure.

One roof construction according to the present invention is shown in FIGS. 3 and 4, wherein compression ring 10, having an oval shape to match the perimeter of underlying building structure 1 rests upon a number of concrete support columns or other suitable foundation which may extend upward from underlying structure 1. Non-circular curve 12 is constructed on compression ring 10 as described above. A plurality of hoop-like tension members 50 are concentrically arranged within non-circular curve 12 on compression ring 10. As best seen in FIGS. 5 and 6, hoop-like tension members 50 are arranged within compression ring 10 at different heights relative to a common reference plane. A plurality of vertical compression members 70 are affixed at their lower ends to each of hoop-like tension members 50.

A plurality of tension elements are provided for interconnecting each compression member 70 affixed

21 APR 1999

to a first hoop-like tension member 50 to a proximal pair of compression members 70 affixed to an adjacent hoop-like tension member 50. Fig. 3 depicts, in plan, the triangulated arrangement of the tension elements that run between the upper ends of the compression elements. Fig. 4 depicts, in plan, the hoop-like tension members 50 as well as the triangulated arrangement of diagonal tension elements that run between the upper end of one compression element and the lower end of an adjacent compression element.

As best shown in FIGS. 3-6, these tension elements include: a first upper tension member 100 (Fig. 3) extending from upper node 80 of compression member 70 affixed to the first hoop-like tension member 50 to upper node 80 of one of the proximal pair of compression members 70 affixed to the adjacent hoop-like tension member 50; a second upper tension member 101 (Fig. 3) extending from upper node 80 of compression member 70 affixed to the first hoop-like tension member 50 to upper node 80 of the other one of the proximal pair of compression members 70 affixed to the adjacent hoop-like tension member 50; a first diagonal tension member 110 (Fig. 4) extending from upper node 80 of compression member 70 affixed to the first hoop-like tension member 50 to lower node 90 of one of the proximal pair of compression members 70 affixed to adjacent hoop-like tension member 50; and a second diagonal tension member 111 (Fig. 4) extending from upper node 80 of compression member 70 affixed to the first hoop-like tension member 50 to lower node 90 of the other one of the proximal pair of compression members 70 affixed to adjacent hoop-like tension member 50.

The triangulated structure of the present invention also includes means for securing the

21 APR 1999

outermost hoop-like tension member 50 and compression members 70 attached thereto to compression ring 10. In the preferred embodiment, a plurality of tension elements interconnect each compression member 70 affixed to outermost hoop-like tension member 50 to a proximal pair of nodes 40 on compression ring 10.

Preferably, the plurality of tension elements include: a first upper tension member 102 (Fig. 3) extending outwardly from upper node 80 of compression member 70 affixed to outermost hoop-like tension member 50 to one of the proximal pair of nodes 40 on compression ring 10; and second upper tension member 103 (Fig. 3) extending outwardly from upper node 80 of compression member 70 affixed to outermost hoop-like tension member 50 to the other one of the proximal pair of nodes 40 on compression ring 10; a first diagonal tension member 112 (Fig. 4) extending outwardly from lower node 90 of compression member 70 affixed to outermost hoop-like tension member 50 to one of the proximal pair of nodes 40 on compression ring 10; and a second diagonal member 113 (Fig. 4) extending outwardly from lower node 90 of compression member 70 affixed to outermost hoop-like tension member 50 to the other one of the proximal pair of nodes 40 on compression ring 10.

As shown in FIGS. 7 and 8, nodes 40 further include attachment members 42 for attaching upper tension members 102, 103 to compression ring 10 and attachment members 44 for attaching diagonal tension members 112, 113 to compression ring 10. Attachment members 42, 44 are designed such that the intersection of the axial centerlines of all tension members attached to compression ring 10 coincide with nodes 40. In the preferred embodiment, compression ring 10 comprises a concrete box girder. Since nodes 40 lie on

21 APR 1999

non-circular curve 12 constructed on compression ring 10, the location of nodes 40 on compression ring 10 varies around non-circular curve 12. Accordingly, the location of attachment members 42, 44 also varies around compression ring 10.

In an alternate embodiment, illustrated in FIGS. 9 and 10, compression ring 10 comprises triangular truss 210. Triangular truss 210 further includes horizontal top truss 212 and a pair of inclined side trusses 214, 216 which are secured to top truss 212 and which extend downward from top truss 212 to a common point. The shape of triangular truss 210 varies around the perimeter of the underlying structure to accommodate the change in the location of nodes 40 relative to the underlying structure, due to the approximation of the perimeter by non-circular curve 12. Truss 210 in FIG. 10 illustrates the shape of the truss when node 40 lies inside a support column of underlying structure 1, such as at line 10-10 of FIG. 9. Truss 210' illustrates the shape of the truss when node 40 lies directly above a support column of underlying structure 1, such as at line 10'-10' of FIG. 9.

In the preferred embodiment, a cable truss 120, shown in FIG. 5, is positioned along the major axis between centers A, A' of circular arcs 20, 21 to incorporate a triangulated geometry into a non-circular configuration. Cable truss 120 preferably includes an upper tension member forming a top chord 122, a lower tension member parallel to top chord 122 forming a bottom chord 124, a plurality of compression members 126 and 127, of varying heights, having upper and lower ends. The lower ends of compression members 126, 127 are affixed to bottom chord 124. The upper ends of compression members 126 are affixed to top chord 122,

21 APR 1999

while compression members 127 are affixed to top chord 122 at some point below their upper ends. Cable truss 120 also includes a plurality of diagonal tension members extending from the point at which a first compression member 126, 127 is affixed to top chord 122 to the lower end of an adjacent compression member 126, 127, forming diagonal chords 128.

Also, a plurality of tension elements are provided for interconnecting an innermost hoop-like tension member 50 to cable truss 120. In the preferred embodiment, these tension elements interconnect each compression member 70 affixed to innermost hoop-like tension member 50 to at least one compression member 126, 127 of cable truss 120. Preferably, as shown in FIGS. 3 and 4, these tension elements include: at least one upper tension member 104 (Fig. 3) extending inwardly from upper node 80 of compression member 70 affixed to innermost hoop-like tension member 50 to the upper end of at least one compression member 126, 127 of cable truss 120 and at least one diagonal tension member 114 (Fig. 4) extending inwardly from upper node 80 of compression member 70 affixed to innermost hoop-like tension member 50 to the lower end of at least one compression member 126, 127 on cable truss 120.

In order to provide a roof which has an overall downward slope, an uppermost tension member 106 (Fig. 3) is positioned along the major axis between A, A', above cable truss 120 and is connected to the upper ends of compression members 127.

One particular advantage of the present invention is that the number of structural members in tension is maximized to more efficiently utilize the tensile property of the building materials. Therefore, the structural members that are in tension are preferably formed of flexible materials such as cables.

21 APR 1999


For example, hoop-like tension members 50, upper tension members 100-106, diagonal tension members 110-114, top chord 122, bottom chord 124, and diagonal chord 128 of cable truss 120, preferably comprise cable such as wire strand, or wire rope. In the preferred embodiment, upper tension members 100-106 comprise a plurality of cables which may drop off toward the center of the structure. Compression members 70 as well as compression members 126, 127 of cable truss 120 are preferably rigid posts such as steel pipe.

FIGS. 11 and 12 illustrate an upper attachment 130 which may be affixed to the upper end of compression members 70. Upper attachment 130 is designed to attach to a compression member 70 first ends 100a, 101a of a first set of upper tension members 100, 101, second ends 100b, 101b of a second set of upper tension members 100, 101, and first ends 110a, 111a of a set of diagonal tension members 110, 111. Upper attachment 130 includes: a first attachment plate 131 for attaching the upper end of compression member 70; a pair of attachment plates 132, 133 located on an outer side of compression member 70 for attaching second ends 100b, 101b of upper tension members 100, 101, which extend inwardly from upper nodes 80 of a proximal pair of compression members 70 located on an outer adjacent hoop-like tension member 50; a second pair of attachment plates 134, 135 located on an inner side of compression member 70 for attaching first ends 100a, 101a of upper tension members 100, 101, which extend inwardly from upper node 80 of compression member 70 to upper nodes 80 of a proximal pair of compression members 70 located on an inner adjacent hoop-like tension member 50; a saddle-like plate 136 positioned above attachment plates 134, 135 and

21 APR 1999

conforming to the geometry therebetween for providing additional structural support to the attachment of upper tension members 100, 101; and a second attachment plate 137 for attaching first ends 110a, 111a of diagonal tension members 110, 111, which extend inwardly from upper node 80 of compression member 70 to lower nodes 90 of a proximal pair of compression members 70 located on an inner adjacent hoop-like tension member 50. Significantly, upper attachment 130 is designed such that the intersection of the axial centerlines of all tension members 100, 101, 110, 111 and compression member 70 attached thereto coincide with upper node 80.

FIGS. 13 and 14 illustrate a lower attachment 140 which may be affixed to the lower end of compression member 70 and which in turn affixes the lower end of compression member 70 to hoop-like tension member 50 at nodes 60. Lower attachment 140 includes: a first plate 142 for attaching the lower end of compression member 70; a second attachment plate 144 located on an outer side of compression member 70 for attaching the second ends 110b, 111b of diagonal tension members 110, 111, which extend inwardly from upper nodes 80 of a proximal pair of compression members 70 located on an outer adjacent hoop-like tension member 50; and a third attachment plate 146 for securing the lower end of compression member 70 to hoop-like tension members 50. A plate 148, located beneath plate 146, may also be included to secure the lower end of compression member 70 to hoop-like tension member 50. Lower attachment 140 is designed such that the axial centerlines of diagonal tension members 110, 111 and compression member 70 as well as the radial centerline of hoop-like tension member 50 attached thereto coincide with lower node 90.

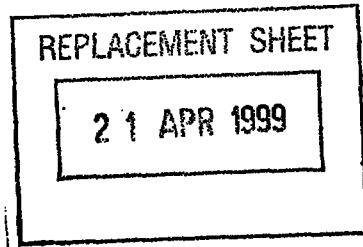

Overlying upper tension members 100-106 of the triangulated support structure is a flexible membrane 5 serving as a roof for the underlying structure. Membrane 5 may be formed by Teflon™-coated fiberglass, silicone coated polyester, or corrugated steel, although it is contemplated that other materials such as canvas may also be used. Preferably, however, membrane 5 is constructed of Teflon™-coated fiberglass.

In the preferred embodiment, membrane 5 comprises a plurality of diamond-shaped panels, such as panel abcd shown in FIG. 3. The vertices of these roof panels coincide with upper nodes 80 of compression members 70 and are secured to upper attachments 130. As such, these diamond shaped panels form hyperbolic paraboloids. This is best illustrated in FIG. 1. Significantly, the hyperbolic paraboloid shape the roof panels take when secured to upper nodes 80 of compression members 70 contributes to the structural stiffness of these panels, without the use of additional cables on top of membrane 5.

For convenience, a network of catwalks 150 can be constructed on hoop-like tension members 50 to provide for maintenance and installation personnel, as well as to provide mounting for service lighting, speakers and rigging for special events. Catwalks 150 may have handrails 152 on either side to provide safety.

The uniqueness of the cable truss structure designed in accordance with the present invention is best demonstrated by FIG. 1. In particular, the triangulated location of compression members 70 on hoop-like tension members 50 in an offset relation, gives rise to the unique hyperbolic paraboloid shape of the roof panels when attached to upper nodes 80 of compression members 70. The triangulated structure

21 APR 1999

provides an added degree of stability over prior art structures while minimizing the number of structural members required. Also of particular importance is the tent-like appearance of the overall structure, due primarily to the employment of cable truss 120 along the major axis.

FIG. 15 illustrates another non-circular configuration for which the present invention may be used, in which like elements are numbered in a like manner. This embodiment also includes a compression ring 218 having a non-circular plan which substantially matches the perimeter of the underlying building space. In this embodiment, however, a discontinuous non-circular curve 219 is constructed on compression ring 218 from a plurality of circular arcs, wherein each of the arcs has the same radius. Non-circular curve 219 includes a first pair of circular arcs 220, 221 having their centers on the major axis of the non-circular curve formed by the perimeter of the underlying building structure. The centers of circular arc 220, 221 are equidistant from the minor axis and on opposite sides. Non-circular curve 219 further includes a second pair of circular arcs 230, 231 having their centers located on the minor axis of the non-circular curve formed by the perimeter of the underlying building structure. The centers of circular arc 230, 231 are equidistant from the major axis and on opposite sides. First pair of circular arcs 220, 221 and second pair of circular arcs 230, 231 intersect to form discontinuous non-circular curve 219.

A plurality of hoop-like tension members 250 are concentrically arranged within non-circular curve 219 at different heights relative to a common plane. Nodes 240 are located at the intersections of the above-described circular curves which make up non-

21 APR 1999

circular curve 219. Additional nodes 240 are evenly spaced between the nodes located at these intersections. Vertical compression members 270 having upper and lower ends are attached at their lower ends to each hoop-like tension member 250 at spaced-apart locations 260 on the tension members. Compression members 270 are located on each hoop-like tension member 250 such that a compression member 270 on a first hoop-like tension member 250 and a proximal pair of compression members 270 on an adjacent hoop-like tension member 250 form, in plan, the vertices of a substantially isosceles triangle. Compression members 270 on an outermost hoop-like tension member 250 are located such that a node 240 located on outer compression ring 218 and a proximal pair of compression members 270 on the outer most hoop-like tension member 250 form, in plan, the vertices of a substantially isosceles triangle. A cable truss 320 is positioned along the major axis to complete the triangulated structure.

As described with respect to the embodiment shown in FIGS. 3 and 4, the structure includes upper and diagonal tension members 300, 301 and 310, 311, respectively, which interconnect each compression member 270 on a first hoop-like tension member 250 to the proximal pair of compression members 270 on an adjacent hoop-like tension member 250. Also, upper and diagonal tension members 302, 312 interconnect a compression member 270 located on outermost hoop-like tension member 250 to a proximal pair of nodes 240 on outer compression ring 218. Finally, tension elements are provided to interconnect compression members 270 on an inner most hoop-like tension member 250 to cable truss 320.

21 APR 1999

In this embodiment, all of the upper attachments on any one hoop-like tension member 250 are identical since the angular relation of tension members arriving at an upper node are identical for each compression member on the hoop. Similarly, all of the lower attachments are identical. Only the upper and lower attachments for compression members lying along lines 340 are different for each hoop.

FIG. 16 illustrates another non-circular configuration for which the present invention may be used, where like elements are designated by like numerals. This embodiment is drawn specifically to an underlying structure having a substantially triangular perimeter. A compression ring 410 is provided having a plan which substantially matches the triangular perimeter of the underlying building space. In this embodiment, a discontinuous non-circular curve 412 is constructed from three circular arcs having the same radius. The centers of these arcs are located on meridians 420 which are drawn from each vertex of the triangle to a middle point of the opposite side of the triangle. In this manner, non-circular curve 412 is constructed which substantially matches the perimeter of the underlying building space.

Nodes 440 are located at each vertex of the triangle and additional nodes 440 are evenly spaced along non-circular curve 412 between each vertex. A plurality of hoop-like tension members 450 are concentrically arranged within non-circular curve 412 at different heights relative to a common plane. Vertical compression members 470 are attached at their lower ends to each hoop-like tension member at spaced-apart locations 460 on the tension members such that a compression member 470 on a first hoop-like tension member 450 and a proximal pair of compression members

21 APR 1999

470 on an adjacent hoop-like tension member 450 form, in plan, the vertices of a substantially isosceles triangle.

Upper and diagonal tension members 500, 501 and 510, 511, respectively, are provided which interconnect compression member 470 on the first hoop-like tension member 450 to the proximal pair of compression members 470 located on the adjacent hoop-like tension member 450. Also, upper and diagonal tension members are provided which interconnect each compression member 470 on an outermost hoop-like tension member 450 to at least one node 440 on outer compression member 410.

In addition, a tension element 520, such as a post, is provided at a center point of the triangle. Tension elements are also provided which interconnect each compression member 470 on an innermost hoop-like tension member 450 to inner tension element 520. In this manner, a triangulated structure is achieved wherein the upper and lower attachments along each hoop-like tension member are the same.

While the drawings illustrate a roof structure for a non-circular underlying structure, it is apparent that the triangulated cable arrangement disclosed in the present invention is also applicable to circular stadiums or arenas. In the case of a circular stadium or arena, a single tension member, such as an inner hoop-like tension member or single post, is employed at the center of the circle. As previously described with respect to a non-circular configuration, compression members on circular tension hoops and nodes on a circular compression ring are located at the intersections of alternating ones of a plurality of radial lines drawn through the center of the circle with alternating ones of the tension hoops

21 APR 1999

and a circular curve constructed on the compression ring. Compression members define upper and lower nodes as described before, and upper tension members as well as diagonal tension members interconnect each compression member on a first tension hoop to a proximal pair of compression members on an adjacent tension hoop. In this manner, a triangulated circular roof structure is constructed.

In a similar manner, an eye-shaped roof structure may also be constructed. In this case, a pair of circular arcs, each having a center located on the minor axis, equidistant from the major axis and on opposite sides, intersect to form a discontinuous eye-shaped curve which approximates the perimeter of the underlying structure. A tension member, such as a cable truss, is positioned along the major axis and a plurality of tension hoops are concentrically arranged within the eye-shaped curve.

Nodes are located on a compression ring at the intersections of the two circular arcs. Additional nodes are evenly spaced along the eye-shaped curve between the nodes located at these intersections. Compression members are located on the tension hoops such that a compression member on a first tension hoop and a proximal pair of compression members on an adjacent hoop form, in plan, the vertices of a substantially isosceles triangle. Also, compression members on an outermost tension hoop are located such that a compression member on the outermost tension hoop and a proximal pair of nodes on the compression ring form, in plan, the vertices of a substantially isosceles triangle. A plurality of tension elements interconnect each compression member on a first tension hoop to the proximal pair of compression members on an adjacent hoop. Finally, a plurality of tension

21 APR 1999

elements interconnect each compression member on the outermost hoop to the proximal pair of nodes on the compression ring.

As is apparent from the description above, the present invention is well-suited for adapting triangulated structure to a wide variety of non-circular and circular configurations. By using at least one circular arc to approximate the configuration of the underlying structure, an efficient cable arrangement is derived. By approximating an underlying non-circular configuration with a plurality of circular arcs, the triangulated geometry disclosed in the present invention may be used for a wide variety of shapes while reducing the variety of cable attachment geometries and increasing the number of attachments in which the geometry of cables arriving thereat is the same. This allows for the use of one upper attachment to be used at a plurality of upper nodes as well as one lower attachment to be used at a plurality of lower nodes.

While the invention has been described in conjunction with specific embodiments, it is evident that numerous alternatives, modifications, and variations will be apparent to those skilled in the art in light of the foregoing description.

REPLACEMENT SHEET

21 APR 1999

- 27 -

REPLACEMENT SHEET

CLAIMS

1. A triangulated structure (2) for supporting a roof that projects in plan a substantially closed oval curve having major and minor axes, comprising:

a substantially horizontal outer compression ring (10);

a substantially planar cable truss (120) positioned along the major axis of the oval;

a plurality of oval tension hoops (50) concentrically arranged within said compression ring at different heights relative to a common reference plane;

a plurality of substantially vertical compression member (70) having upper and lower ends, defining upper and lower nodes (80, 90), affixed at their lower ends to one of said oval tension hoops, wherein compression members affixed (70) to a first tension hoop are not radially aligned with compression members affixed to an adjacent tension hoop;

a plurality of tension elements interconnecting a compression member affixed to the first tension hoop to a proximal pair of compression members affixed to an adjacent tension hoop, said tension elements including:

a first upper tension member (100) extending from the upper node (80) of said compression member (70) affixed to said first tension hoop (50) to the upper node (80) of one of said proximal compression members (70) affixed to said adjacent tension hoop (50);

a second upper tension member (101) extending from said upper node (80) of said compression member (70) affixed to said first tension hoop (50) to the upper node (80) of the other one of said proximal compression members (70) affixed to said adjacent tension hoop (50);

a first diagonal tension member (110) extending from said upper node (80) of said compression member (70) affixed to said first tension hoop (50) to the



* C L M S *

21 APR 1999

lower node (90) of one of said proximal compression members (70) affixed to said adjacent tension hoop (50); and

a second diagonal tension member (111) extending from said upper node (80) of said compression member (70) affixed to said first tension hoop (50) to the lower node (90) of the other one of said proximal compression members (70) affixed to said adjacent tension hoop (50);

means (102, 103, 112, 113) for securing an outermost tension hoop (50) and the vertical compression members (70) attached thereto to said compression ring (10); and

means (104, 105, 114) for securing an innermost tension hoop (50) to said cable truss (120).

2. The triangulated structure of claim 1 wherein said substantially closed oval curve comprises at least two circular arcs (20, 21).

3. The triangulated structure of claim 2 wherein said substantially closed oval curve comprises four circular arcs (20, 21, 30, 31).

4. The triangulated structure of claim 3 wherein the area enclosed by the substantially closed oval curve comprises:

first and second end sectors (22, 23) formed by first and second circular arcs (20, 21), the centers (A, A') of which lie on the major axis of said oval curve, equidistant from the minor axis and on opposite sides thereof; and

first and second intermediate segments (32, 33) formed by first and second intermediate circular arcs (30, 31), the centers (B, B') of which are located on the minor axis of said oval curve, at a predetermined distance from said major axis on opposite side thereof.

5. The triangulated structure of claim 4 wherein compression members (70) located in said first end sector (22) are affixed to said tension hoops (50) at positions



* C L M S *

21 APR 1999

defined by the intersections of alternating ones of said tension hoops (50) with alternating ones of a plurality of radial lines drawn through the center (A) of said first circular arc (20); and

wherein compression members (70) located in said second end sector (23) are affixed to said tension hoops (50) at positions defined by the intersections of alternating ones of said tension hoops (50) with alternating ones of a plurality of radial lines drawn through the center (A') of said second circular arc (21).


6. The triangulated structure of claim 5 wherein compression members (70) located in said first intermediate segment (22) are affixed to said tension hoops (50) at positions defined by the intersections of alternating ones of said tension hoops (50) with alternating ones of a plurality of radial lines drawn through the center (B) of said first intermediate arc (30); and

wherein compression members (70) located in said second intermediate segment (33) are affixed to said tension hoops (50) at positions defined by the intersections of alternating ones of said tension hoops (50) with alternating ones of a plurality of radial lines drawn through the center (B') of said second intermediate arc (33).

7. The triangulated structure of claim 1 wherein said compression ring (10) comprises a plurality of nodes (40) forming a substantially closed oval curve concentric to said outermost tension hoop (50).

8. The triangulated structure of claim 7 wherein said means for securing said outermost tension hoop (50) and the vertical compression members (70) attached thereto to said compression ring (10) comprises a plurality of tension elements (102, 103, 112, 113) interconnecting a compression member (70) affixed to said outermost tension hoop (50) to a proximal pair of nodes (40) on said compression ring



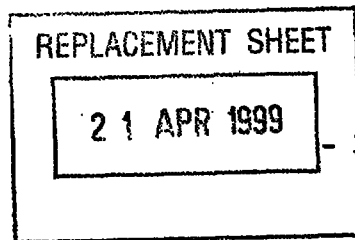

REPLACEMENT SHEET

(10).

9. The triangulated structure of claim 8 wherein said plurality of tension elements comprise:

a first upper tension member (102) extending outwardly from the upper node (80) of said compression member (70) affixed to said outermost tension hoop (50) to one of said proximal nodes (40) on said compression ring (10);

a second upper tension member (103) extending outwardly from said upper node (80) of said compression member (70) affixed to said outermost tension hoop (50) to the other one of said proximal nodes (40) on said compression ring (10);

a first diagonal tension member (112) extending outwardly from the lower node (90) of said compression member (70) affixed to said outermost tension hoop (50) to one of said proximal nodes (40) on said compression ring (10); and

a second diagonal tension member (113) extending outwardly from said lower node (90) of said compression member (70) affixed to said outermost tension hoop (50) to the other one of said proximal nodes (40) on said compression ring (10).

10. The triangulated structure of claim 7 wherein said compression ring (10) comprises a concrete box girder.

11. The triangulated structure of claim 10 wherein the location of said nodes (40) relative to the cross-section of said girder varies around the perimeter of said compression ring (10).

12. The triangulated structure of claim 7 wherein said compression ring (10) comprises a triangular truss (210) having a horizontal top truss (212) and a pair of inclined side trusses (214, 216) secured to said top truss (212), which extend downward from said top truss (212) to a common point.



21 APR 1999

- 31 -

13. The triangulated structure of claim 1 wherein the number of compression members (70) on each tension hoop (50) is the same.

14. The triangulated structure of claim 1 wherein said tension elements (100, 101, 110, 111) comprise a plurality of cables.

15. The triangulated structure of claim 14 wherein each of said upper tension members (100, 101) comprise wire rope.

16. The triangulated structure of claim 14 wherein each of said diagonal tension members (110, 111) comprise wire strand.

17. The triangulated structure of claim 4 wherein said cable truss (120) comprises:

an upper tension member forming a top chord (122);

a lower tension member parallel to said top chord (122), forming a bottom chord (124);

a plurality of compression members (126, 127) of varying heights which are affixed to said top and bottom chords (122, 124); and

a plurality of diagonal tension members extending from said top chord (122) to said bottom chord (124) between adjacent compression members (126, 127), forming diagonal chords (128).

18. The triangulated structure of claim 17 wherein each of said upper, lower and diagonal tension members (122, 124, 128) comprise wire strand.

19. The triangulated structure of claim 17 wherein each of said upper, lower and diagonal tension members (122, 124, 128) comprise wire rope.

20. The triangulated structure of claim 17 wherein said top chord, bottom chord, diagonal chord (122, 124, 128) and



* C L M S *

21 APR 1999

compression members (126, 127) all lie in a vertical plane.

21. The triangulated structure of claim 20 wherein said cable truss (120) has first and second ends which coincide with the centers (A, A') of said first and second circular arcs (20, 21), respectively.

22. The triangulated structure of claim 21 wherein said first and second ends of said cable truss (120) comprise compression members (126).

23. The triangulated structure of claim 22 wherein said means for securing said innermost tension hoop (50) to said cable truss (120) comprises a plurality of tension elements (104, 105, 114) interconnecting a compression member (70) affixed to said innermost tension hoop (50) to at least one compression member (126, 127) of said cable truss.

24. The triangulated structure of claim 1 wherein said oval tension hoops (50) comprise a plurality of cables.

25. The triangulated structure of claim 24 wherein each of said tension hoops (50) comprise a plurality of wire strands.

26. The triangulated structure of claim 24 wherein each of said tension hoops (50) comprise a plurality of wire ropes.

27. The triangulated structure of claim 1 further including a flexible membrane (5) overlying said structure (2).

28. The triangulated structure of claim 27 wherein said flexible membrane (5) is selected from Teflon™-coated fiberglass, silicon coated polyester and corrugated steel.

29. The triangulated structure of claim 27 wherein said membrane (5) comprises a plurality of diamond shaped



* C L M S *

REPLACEMENT SHEET

21 APR 1999

- 33 -

REPLACEMENT SHEET

panels, the vertexes of which coincide with the upper nodes (80) of the substantially vertical compression members (70).

30. The triangulated structure of claim 29 wherein each of said diamond shaped panels forms a hyperbolic paraboloid when secured to said upper nodes (80) of said vertical compression members (70).

31. A triangulated cable arrangement for supporting a roof comprising:

an inner tension member (520);

a plurality of substantially horizontal tension hoops (450) concentrically arranged about said inner tension member (520) at different heights relative to a common reference plane;

a plurality of substantially vertical compression members (470) having an upper end and a lower end, defining upper and lower nodes, affixed at their lower ends to one of said tension hoops (450), wherein compression members (470) affixed to a first hoop (450) are not radially aligned with compression members (470) affixed to an adjacent tension hoop (450);

a plurality of tension elements interconnecting a first compression member (470) affixed to said first tension hoop (450) to a proximal pair of compression members (470) affixed to said adjacent tension hoop (450), said tension elements including:

a pair of upper tension members (500, 501) extending from the upper node of said compression member (470) affixed to said first tension hoop (450) to the upper nodes of each of said proximal pair of compression members (470) affixed to said adjacent tension hoop (450); and

a pair of diagonal tension members (510, 511) extending from said upper node of said compression member (470) affixed to said first tension hoop (450) to the lower nodes of each of said proximal pair of



21 APR 1999

- 34 -

compression members (470) affixed to said adjacent tension hoop (450);

means for securing an innermost tension hoop (450) and the compression members (470) attached thereto to said inner tension member (520); and

means for securing an outermost tension hoop (450) to a support structure.

32. The triangulated cable arrangement of claim 31 wherein said means for securing said innermost tension hoop (450) to said inner tension member (520) comprises a plurality of tension elements interconnecting compression members (470) affixed to said innermost tension hoop (450) to said inner tension member (520).

33. The triangulated cable arrangement of claim 32 wherein the roof projects in plan a substantially closed circular curve.

34. The triangulated cable arrangement of claim 33 wherein compression members affixed to every other tension hoop are radially aligned.

35. A support structure for anchoring cables of a triangulated structure which supports a roof projecting in plan a substantially closed oval curve, to an underlying structure having a non-circular perimeter comprising:

a compression beam (10) having a plan corresponding to the non-circular perimeter of the underlying structure; and

a plurality of attachment points (40, 42, 44) located on the compression beam (10) forming in plan a substantially closed oval curve concentric to the substantially closed oval curve of the roof, said plan formed by the attachment points (40, 42, 44) being different from the plan of the compression beam (10).

36. The support structure of claim 35 wherein said attachment points (40, 42, 44) lie along a closed oval



* C L M S *

21 APR 1999

curve defined by first and second circular arcs (20, 21), the centers (A, A') of which lie on a major axis of the non-circular perimeter of the underlying structure, equidistant from a minor axis and on opposite sides thereof; and first and second intermediate circular arcs (30, 31), the centers (B, B') of which are located on the minor axis of the non-circular perimeter of the underlying structure, equidistant from the major axis and on opposite sides thereof.

37. The support structure of claim 36 wherein attachment points (40, 42, 44) are located at positions defined by the intersections of said oval curve with a plurality of radial lines drawn through the centers (A, A', B, B') of said first and second circular arcs (20, 21) and the first and second intermediate arcs (30, 31).

38. The support structure of claim 37 wherein the location of said attachment points (40, 42, 44) relative to the cross-section of said compression beam (10) varies around the perimeter of said support structure.

39. The support structure of claim 38 wherein said compression ring (10) comprises a concrete box girder.

40. The support structure of claim 38 wherein said compression beam comprises a triangular truss (210) having a horizontal top truss (212) and a pair of inclined side trusses (214, 216) secured to said top truss (212), which extend downward from said top truss (212) to a common point.

41. In a structure for supporting a roof, of the type having a plurality of tension hoops (50) concentrically arranged at different heights relative to a common reference plane, a plurality of substantially vertical compression members (70) having upper and lower ends (80, 90), affixed at their lower ends to one of said tension



21 APR 1999

hoops (50), at least one upper tension member (100, 101) extending from the upper end (80) of each compression member (70) affixed to a first tension hoop (50) to the upper end (80) of at least one compression member (70) affixed to an adjacent tension hoop (50) and at least one diagonal tension member (110, 111) extending from the upper end (80) of each compression member (70) affixed to said first tension hoop (50) to the lower end (90) of at least one compression member (70) affixed to said adjacent tension hoop (50), tension member attaching means comprising:

upper attachment means (130) coupled to the upper end of said substantially vertical compression members (70) for attaching at least one upper tension member (100, 101) and at least one diagonal tension member (110, 111) to the upper end (80) of said compression members (70); and

lower attachment means (140) coupled to the lower end (90) of said substantially vertical compression members (70) for attaching at least one diagonal tension member (110, 111) to the lower end (90) of said compression members (70) and for affixing the lower end (90) of said compression members (70) to one of said tension hoops (50).

42. The attaching means of claim 41 wherein said upper attachment means (130) are configured to attach at least one upper tension member (100, 101) and at least one diagonal tension member (110, 111) to the upper end (80) of said compression member (70) such that the axial centerlines of said at least one upper tension member (50) and said at least one diagonal tension member (50) intersect at a predetermined point (80) lying on the axial centerline of said compression member (70).

43. The attaching means of claim 41 wherein said lower attachment means (140) are configured to attach at least one diagonal tension member (110, 111) to the lower end (90) of said compression member (70) such that the axial centerline of said at least one diagonal tension member and



* C L N S *

REPLACEMENT SHEET

21 APR 1999

- 37 -

REPLACEMENT SHEET

the radial centerline of said tension hoop (50) intersect at a predetermined point (90) lying on the axial centerline of said compression member (70).

44. A triangulated structure for supporting a roof that projects in plan a closed non-circular curve, defining an enclosed area for an underlying building space having a non-circular perimeter, including major and minor axes, comprising:

- an outer compression member (10) having a plan substantially matching the perimeter of the underlying building space;

- a plurality of nodes (40) located about the perimeter of said compression member (10) defining a substantially closed non-circular curve closely approximating the non-circular perimeter of the building space, said curve comprising:

 - first and second circular arcs (20, 21), the centers (A, A') of which are located at predetermined points on the major axis of the non-circular building perimeter, equidistant from the minor axis and on opposite sides thereof; and

 - first and second intermediate circular arcs (30, 31), the centers (B, B') of which are located at predetermined points on the minor axis of the non-circular building perimeter, equidistant from the major axis and on opposite sides thereof;

- a plurality of hoop-like tension members (50) concentrically arranged within said non-circular curve at different heights relative to a common reference plane;

- a plurality of substantially vertical compression members (70) located on each of said hoop-like tension members (50), wherein compression members (70) located on a first tension member (50) and proximal pair of compression members (70) on an adjacent tension member (50) form, in plan, the vertices of a substantially isosceles triangle;

- a plurality of tension elements (100, 101, 110, 111)



* C L M S *

2-1 APR 1999

interconnecting each compression member (70) on said first tension member (50) to said proximal pair of compression members (70) on said adjacent member (50); and

means (102, 103, 112, 113) for interconnecting compression members (70) on an outermost hoop-like tension member (50) to said nodes (40) on said outer compression member (10).

45. The triangulated roof of claim 44 wherein said first and second circular arcs (20, 21) define first and second end sectors (22, 23), and wherein said first and second intermediate circular arcs (30, 31) define first and second intermediate segments (32, 33).

46. The triangulated roof structure of claim 45 wherein compression members (70) in said first end sector (22) are located at the intersections of alternating ones of said tension hoops (50) with alternating ones of a plurality of radial lines drawn through the center (A) of said first circular arc (20); and

wherein compression members (70) in said second end sector (23) are located at the intersections of alternating ones of said tension hoops (50) with alternating ones of a plurality of radial lines drawn through the center (A') of said second circular arc (21).

47. The triangulated roof structure of claim 46 wherein compression members (70) in said first intermediate segment (32) are located at the intersections of alternating one of said tension hoops (50) with alternating ones of a plurality of radial lines drawn through the center (B) of said first intermediate arc (30); and

wherein compression members (70) in said second intermediate segment (33) are located at the intersections of alternating one of said tension hoops (50) with alternating ones of a plurality of radial lines drawn through the center (B') of said second intermediate arc (31).



21 APR 1999

48. The triangulated roof structure of claim 44 further comprising a substantially planar cable truss (120) positioned along the major axis of the non-circular perimeter of the building space, which extends from the center (A) of said first circular arc (20) to the center (A') of said second circular arc (21).

49. The triangulated structure of claim 44 wherein said non-circular curve is discontinuous.

50. The triangulated structure of claim 49 wherein the radius of said first and second pair of circular arcs is the same.

51. The triangulated structure of claim 44 wherein said non-circular curve is continuous.

52. The triangulated cable arrangement of claim 31 wherein the roof projects in plan a substantially closed triangle.

53. The triangulated cable arrangement of claim 31 wherein said means for securing an outermost tension hoop to a support structure comprises:

an outer compression member (410);

a plurality of nodes (440) located on said outer compression member (410); and

a plurality of tension elements interconnecting an outermost tension hoop (450) and the compression members (470) attached thereto to said nodes (440) on said outer compression member (410).

54. The triangulated cable arrangement of claim 53 wherein said nodes (440) on said outer compression member (470) are located on a substantially closed, discontinuous triangular curve (412) comprising three circular arcs.

55. The triangulated cable arrangement of claim 54 wherein the centers of said circular arcs are located on meridians



* C L H S *

21 APR 1999

40 -

(420) joining each vertex of said triangular curve with a middle point of the opposite side of said triangle (412).

56. The triangulated cable arrangement of claim 55 wherein nodes (440) are located at each vertex of said triangle.

57. The triangulated cable arrangement of claim 56 wherein nodes (440) on said outer compression member (410) are evenly spaced.

58. The triangulated structure of claim 44 wherein said outer compression member (10) is substantially horizontal.


59. The triangulated structure of claim 44 wherein said first and second intermediate circular arcs (30, 31) have a larger radius than said first and second circular arcs (20, 21).

60. The triangulated structure of claim 44 wherein said circular arcs (20, 21) and intermediate circular arcs (30, 31) intersect to form said non-circular curve (12).

61. The triangulated structure of claim 44 wherein said plurality of nodes (40) located on said outer compression member (10) and a proximal pair of compression members (70) on an outermost hoop-like tension member (50) form, in plan, the vertices of substantially isosceles triangles.

62. The triangulated cable arrangement of claim 31 wherein each compression member (70) located on a first tension hoop (50) and a proximal pair of compression members (70) on an adjacent tension hoop (50) form, in plan, the vertices of a substantially isosceles triangle.



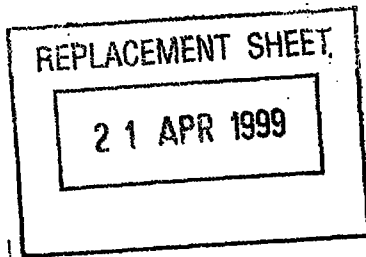

- 41 -

REPLACEMENT SHEET

ABSTRACT

TRIANGULATED ROOF STRUCTURE

A triangulated roof structure for supporting a roof that projects in plan a substantially closed oval curve having major and minor axes, includes a substantially horizontal outer compression ring (10), a substantially planar cable truss (120) positioned along the major axis of the oval, a plurality of oval tension hoop (50) concentrically arranged within the compression ring at different heights relative to a common reference plane, and a plurality of substantially vertical compression members (70) having upper and lower ends (80, 90) affixed at their lower ends (90) to each of the oval tension hoops (50). The compression members (70) are located so that compression members affixed to a first tension hoop (50) are not radially aligned with compression members affixed to an adjacent tension hoop (50). The structure also includes a plurality of tension elements (100, 101, 110, 111) interconnecting a compression member affixed to the first tension hoop to a proximal pair of compression members affixed to an adjacent tension hoop.

Fig. 5