



- (51) International Patent Classification:  
**B60L 5/00** (2006.01)
- (21) International Application Number:  
PCT/EP2012/061024
- (22) International Filing Date:  
11 June 2012 (11.06.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
1109826.6 10 June 2011 (10.06.2011) GB
- (71) Applicant (for all designated States except US): **BOMBARDIER TRANSPORTATION GMBH** [DE/DE];  
Schöneberger Ufer 1, 10785 Berlin (DE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **VOLLENWYDER, Kurt** [CA/CA]; 170 Chelsea Road, Kingston, Ontario K7M 3Y8 (CA).
- (74) Agent: **BRUNOTTE, Joachim**; Patentanwälte Bressel und Partner, Potsdamer Platz 10, 10785 Berlin (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


**Declarations under Rule 4.17:**

— of inventorship (Rule 4.17(iv))

**Published:**

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: SYSTEM AND METHOD FOR TRANSFERRING ELECTRIC ENERGY TO A VEHICLE USING A PLURALITY OF SEGMENTS OF A CONDUCTOR ARRANGEMENT

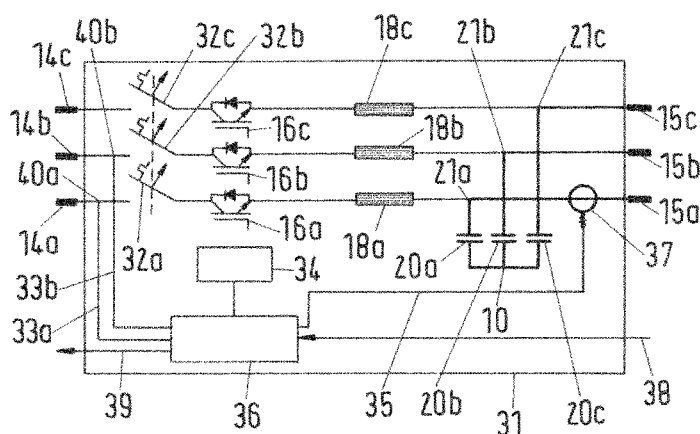

**Fig.3**

(57) Abstract: The invention relates to a system for transferring electric energy to a vehicle (81; 91), in particular to a track bound vehicle (81) such as a light rail vehicle or to a road automobile (91) such as a bus, wherein - the system comprises an electric conductor arrangement (connected to 14) for producing an alternating electromagnetic field and for thereby transferring electromagnetic energy to the vehicle, - the conductor arrangement comprises a plurality of consecutive segments (connected to 15), wherein each segment extends along a different section of the path of travel of the vehicle, - the system comprises an alternating current supply for conducting electric energy to a plurality of the segments, wherein the segments are electrically connected in parallel to each other with the alternating current supply, - each segment is coupled to the supply via an associated switching unit (13) adapted to switch on and off the segment by connecting or disconnecting the segment to/from the supply, - each segment is coupled to the associated switching unit (switches 16) via a constant current source (18, 20) adapted to keep the electric current through the segment constant - while the segment is switched on - independently of the electric power which is transferred to one or more vehicles travelling along the segment.