



(51) International Patent Classification:

F23N 5/08 (2006.01) *F23D 17/00* (2006.01)
F23D 14/38 (2006.01) *A63J 5/02* (2006.01)

(21) International Application Number:

PCT/US2015/024991

(22) International Filing Date:

8 April 2015 (08.04.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/258,981 22 April 2014 (22.04.2014) US

(71) Applicant: **UNIVERSAL CITY STUDIOS LLC**
[US/US]; 100 Universal City Plaza, Universal City, California 91608 (US).

(72) Inventors: **BLUM, Steven C.**; 7718 Bardmoor Hill Circle, Orlando, Florida 32835 (US). **CLARK, Benjamin Robert**; 510 Fair Vista Ct., Wexford, Pennsylvania 15090 (US).

(74) Agents: **POWELL, W. Allen** et al.; P. O. Box 692289, Houston, Texas 77269 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR GENERATING FLAME EFFECT

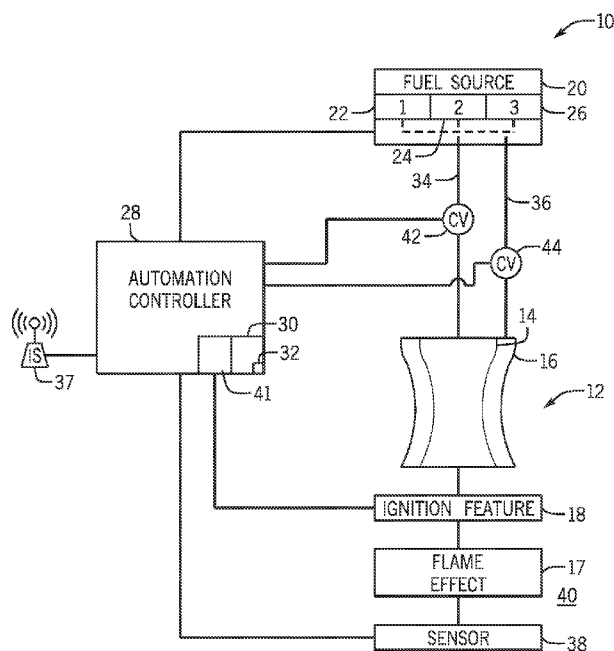


FIG. 1

(57) Abstract: System and method for generating a flame effect. An embodiment includes a nozzle assembly with an outer nozzle and an inner nozzle. At least a portion of the inner nozzle is nested within at least a portion of the outer nozzle. The system also includes a fuel source with two or more separate types of fuel.



-
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- Published:**
- *with international search report (Art. 21(3))*