



(43) International Publication Date
18 April 2013 (18.04.2013)

(51) International Patent Classification:

E01F 3/00 (2006.01) *B64F 1/00* (2006.01)
A62C 3/00 (2006.01) *B64F 1/28* (2006.01)

(21) International Application Number:

PCT/NO2012/050191

(22) International Filing Date:

4 October 2012 (04.10.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20111383 12 October 2011 (12.10.2011) NO

(71) Applicant: **MARINE ALUMINIUM AS** [NO/NO]; Postboks 2044, N-5504 Haugesund (NO).

(72) Inventor: **RØD, Karl Johan**; Smedasundet 56, N-5528 Haugesund (NO).

(74) Agent: **HÅMSØ PATENTBYRÅ ANS**; Postboks 171, N-4302 Sandnes (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEVICE FOR A HELICOPTER DECK

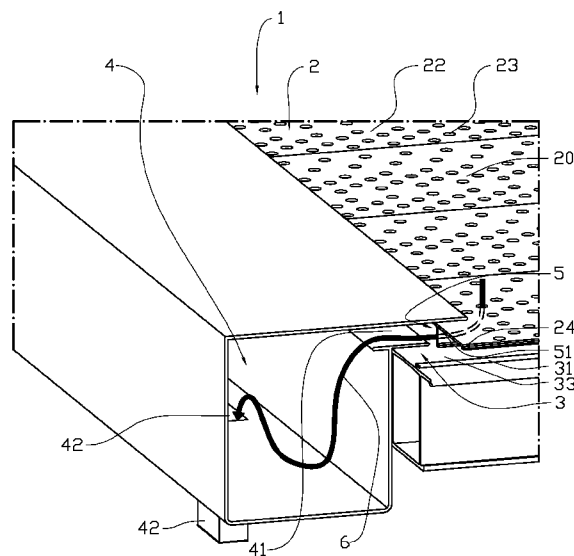


Fig. 2

(57) Abstract: A device for a helicopter deck (1) comprising a supporting, fluid-tight floor (3) is described, the helicopter deck (1) comprising an overlying, draining top cover (2) formed out of at least two top-cover sections (20) arranged side by side, each of the top-cover sections (20) comprising a surface portion (22) provided with several drain openings (23) and at least one channel wall (21, 21') projecting downwards, provided with a foot portion (211, 211') which is arranged to be positioned on the surface (33) of the floor (3); at least one drain channel (5) defined by the top cover (2), the floor (3) and two adjacent channel walls (21, 21'), the drain channel (5) being provided with a mouth portion (51) which is connected to a collecting channel (4); fluid-transport paths (6) being formed through the at least one drain channel (5) between the drain openings (23) and a drain (42) in the collecting channel (4); and the top-cover sections (20) being detachable from the floor (3) and adjacent top-cover sections (20).



Published:

— *with international search report (Art. 21(3))*