



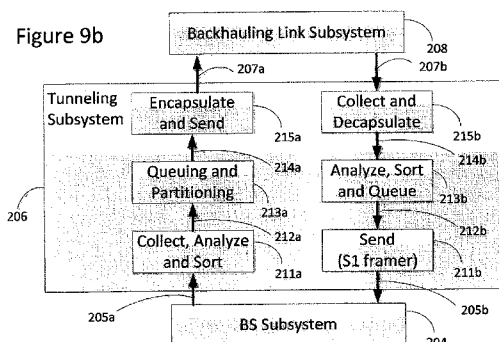

- (51) **International Patent Classification:**
H04W 28/06 (2009.01) *H04W 92/04* (2009.01)
H04W 84/00 (2009.01)
- (21) **International Application Number:** PCT/IL2011/050022
- (22) **International Filing Date:** 23 November 2011 (23.11.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:** 61/417,049 24 November 2010 (24.11.2010) US
- (71) **Applicant (for all designated States except US):** ELTA SYSTEMS LTD. [IL/IL]; 100 Yitzchak Hanassi Blvd., P.O.B. 330, 77102 Ashdod (IL).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** GILOH, Benjamin [IL/IL]; 20155 Moshav Yaad (IL). SHOSHAN, Yaakov [IL/IL]; 17a Habustan Street, 78501 Ashkelon (IL). SCHWARTZ, Adi [IL/IL]; 26 Kdoshey Kahir St., 58362 Holon (IL).
- (74) **Agent:** REINHOLD COHN AND PARTNERS; P.O.Box 13239, 61131 Tel Aviv (IL).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,

[Continued on next page]

(54) **Title:** ARCHITECTURE AND METHODS FOR TRAFFIC MANAGEMENT BY TUNNELING IN MOVING HIERARCHICAL CELLULAR NETWORKS

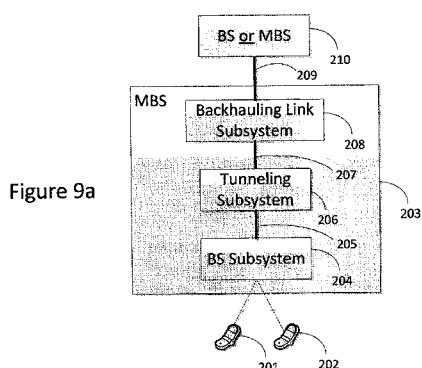

(57) **Abstract:** A hierarchical cellular network system having a core and comprising a plurality of nodes, wherein at least one node comprises a relay; and wherein at least one relay includes: a tunneling subsystem; a backhauling link subsystem interfacing between the tunneling subsystem and a node which is closer to the core than the relay; and a base station subsystem, interfacing between the tunneling subsystem and a mobile station or a node which is further from the core than the relay, wherein the tunneling subsystem is operative to perform the following, on data arriving from a base station subsystem belonging to another node from among the plurality of nodes: collecting the data; and encapsulating the results to be sent in an individual session into packets and sending the packets to the Backhauling Link Subsystem.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*