

01/07/03
2003041027



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number
WO 02/069360 A3

(51) International Patent Classification⁷: H01F 3/10,
17/04, 41/02

936-1, Takaya, Toyooka-shi, Hyogo 668-0064 (JP).
HIWATASHI, Hidetoshi [JP/JP]; 2-31-15, Sakae-cho,
Takatsuki-shi, Osaka 569-0825 (JP). KITAGAWA,
Tomokazu [JP/JP]; 3-3-16, Sumie, Sumiyoshi-ku, Os-
aka-shi, Osaka 558-0043 (JP).

(21) International Application Number: PCT/JP02/01736

(22) International Filing Date: 26 February 2002 (26.02.2002)

(74) Agents: IWAHASHI, Fumio et al.; Matsushita Electric
Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Os-
aka 571-8501 (JP).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (national): CN, SG, US.

(30) Priority Data:
2001-51803 27 February 2001 (27.02.2001) JP
2002-12515 22 January 2002 (22.01.2002) JP
2002-15051 24 January 2002 (24.01.2002) JP

(84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

Published:

— with international search report
— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(71) Applicant (for all designated States except US): MAT-
SUSHITA ELECTRIC INDUSTRIAL CO., LTD.
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka
571-8501 (JP).


(72) Inventors; and

(75) Inventors/Applicants (for US only): NAKATA,
Toshiyuki [JP/JP]; 947-14, Maenoheta-cho, Mat-
sushita-shi, Mie 515-0045 (JP). IMANISHI, Tsunetsugu
[JP/JP]; 494-9, Kokonokaichikamino-cho, Toyooka-shi,
Hyogo 668-0051 (JP). HAMAMOTO, Hiroyuki [JP/JP];

(88) Date of publication of the international search report:
28 November 2002

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: COIL COMPONENT AND METHOD OF MANUFACTURING THE SAME

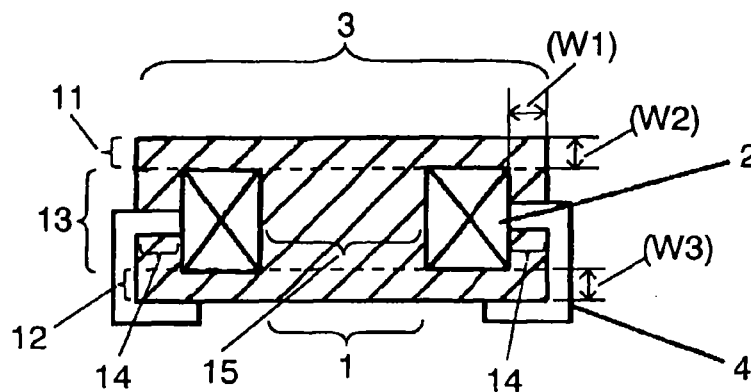

(57) Abstract: A coil component comprising; a coil 2 having a through-hole 1, a magnetic core including the coil, and a terminal 4, wherein magnetic core comprises a top portion 11 disposed at an upper part of the coil, a bottom portion 12 disposed at a lower part of the coil, and a middle portion 13. An outer layer thickness of the middle portion (W1) is less than a diameter of the through-hole, while the top portion and the bottom portion are higher in density than the middle portion. The configuration of the present invention provides a small size coil component with less occurrence of magnetic saturation to prevent lowering of inductance even with thin top portion 11 and bottom portion 12. The coil component further has improved reliability.

WO 02/069360 A3



ACTION