

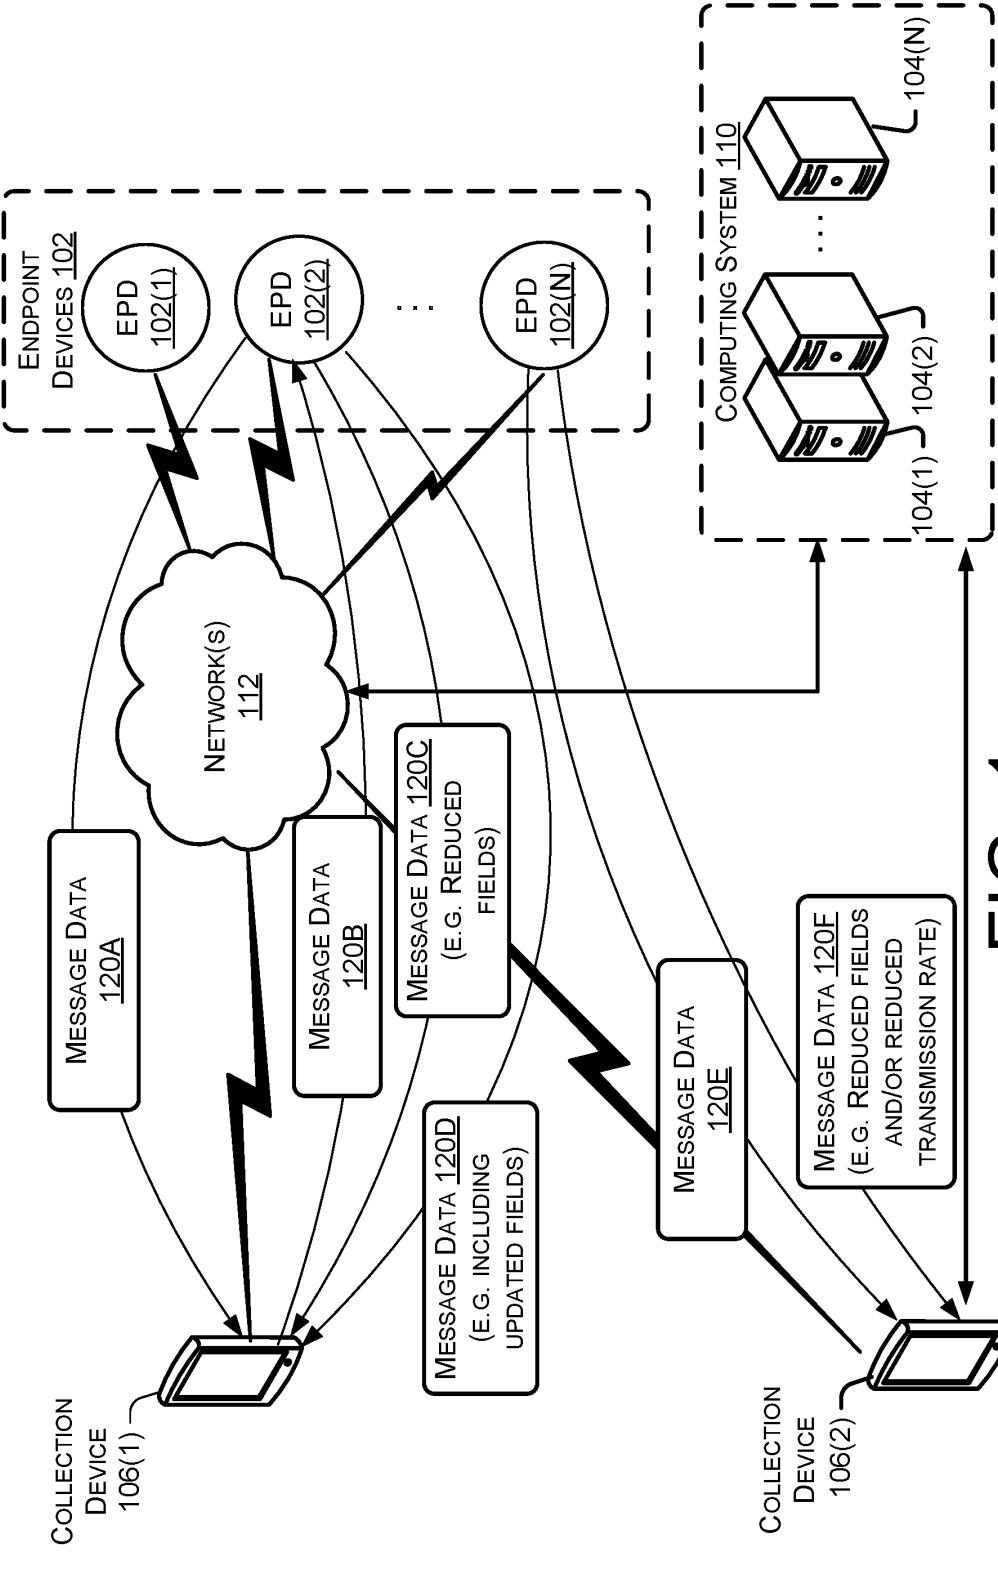


FIG. 1

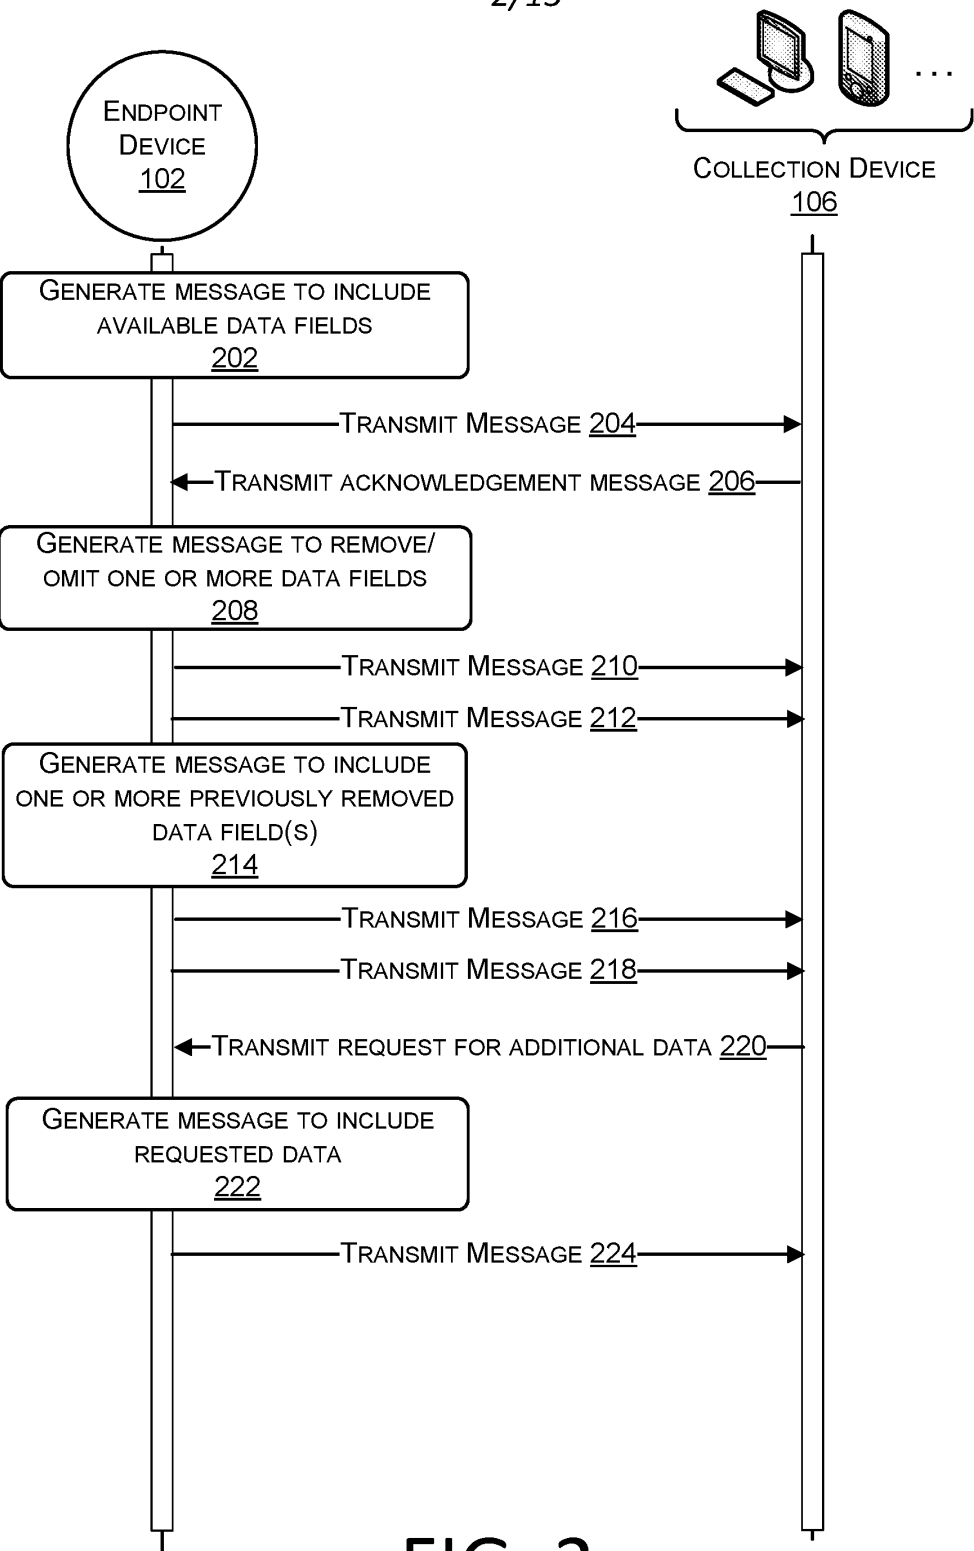


FIG. 2

3/13

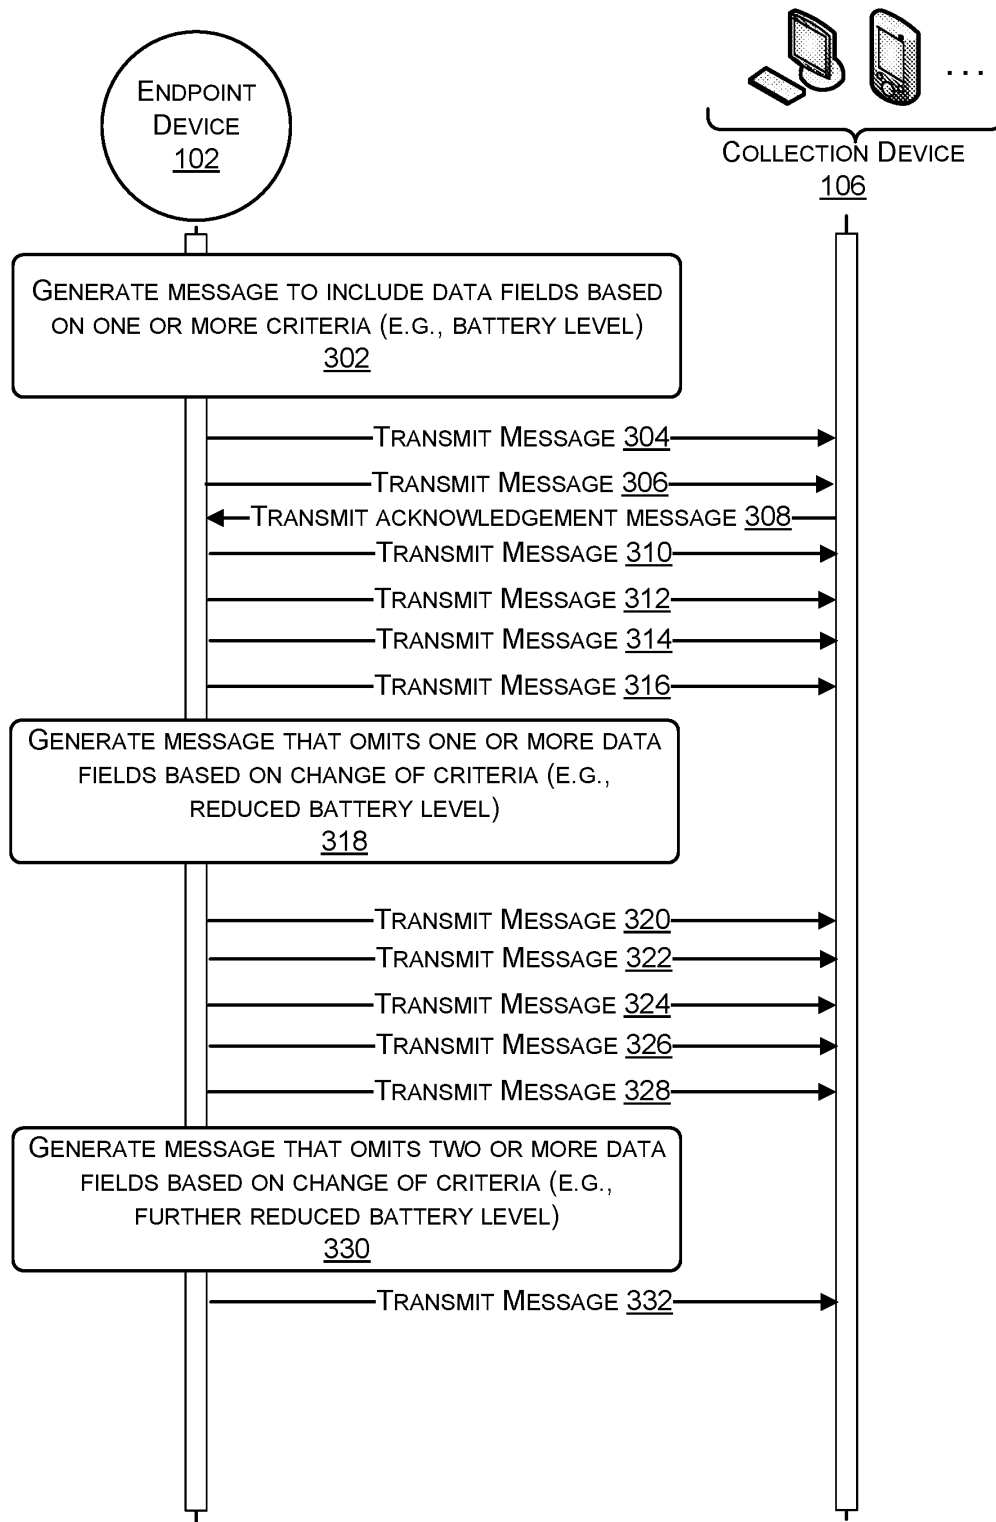


FIG. 3A

4/13

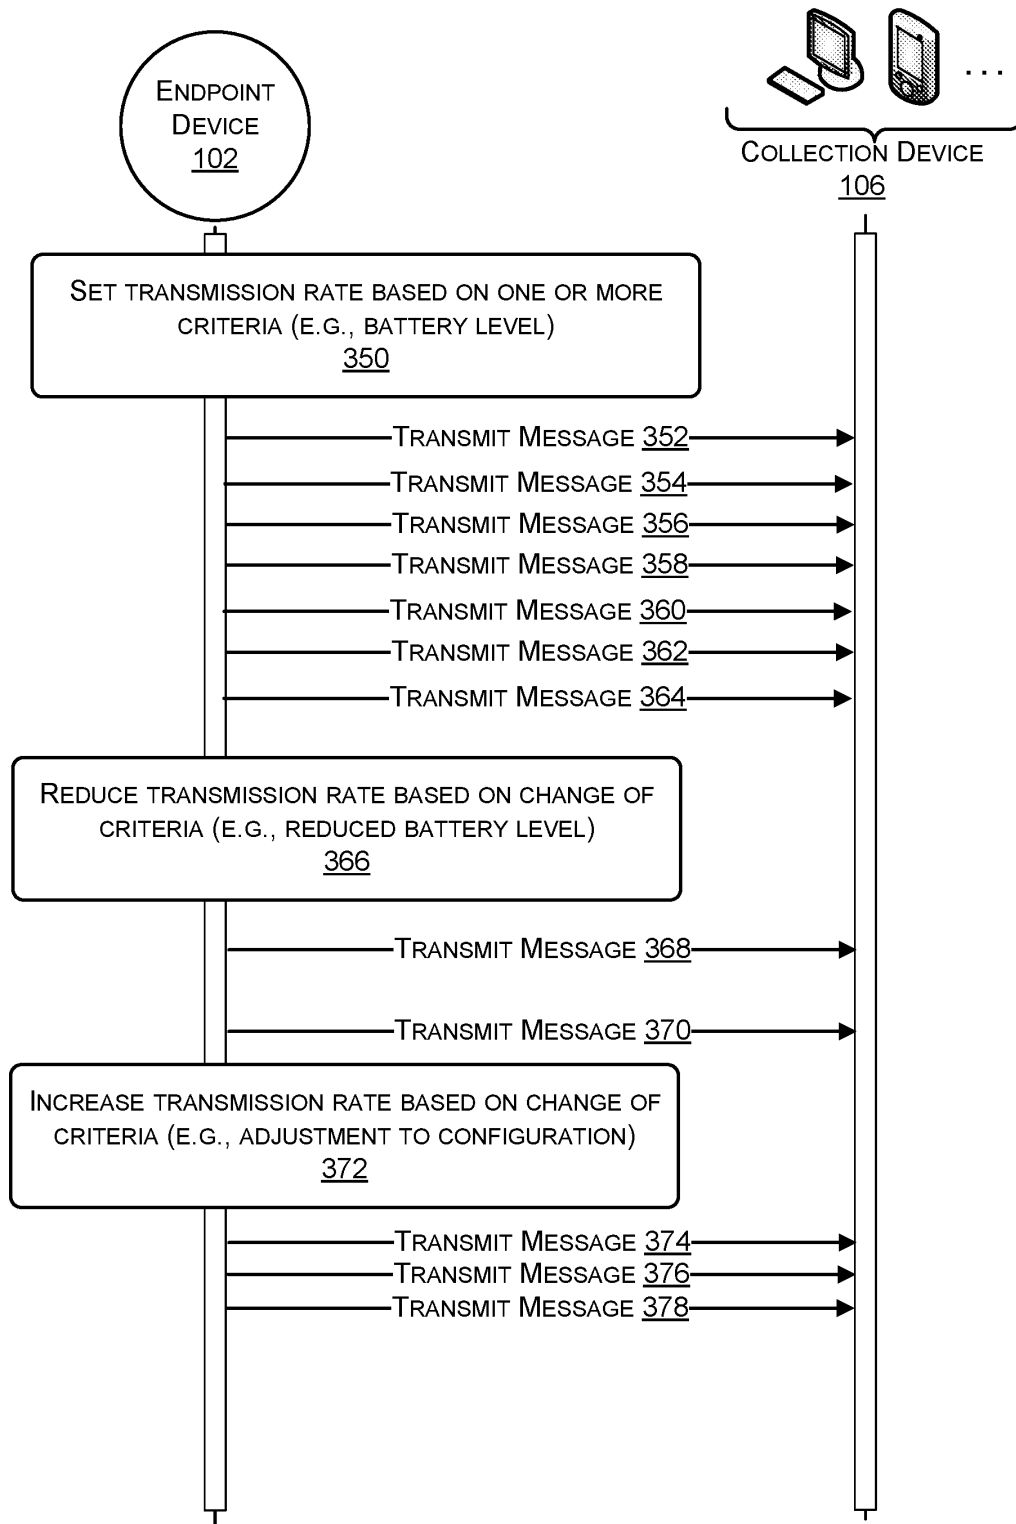


FIG. 3B

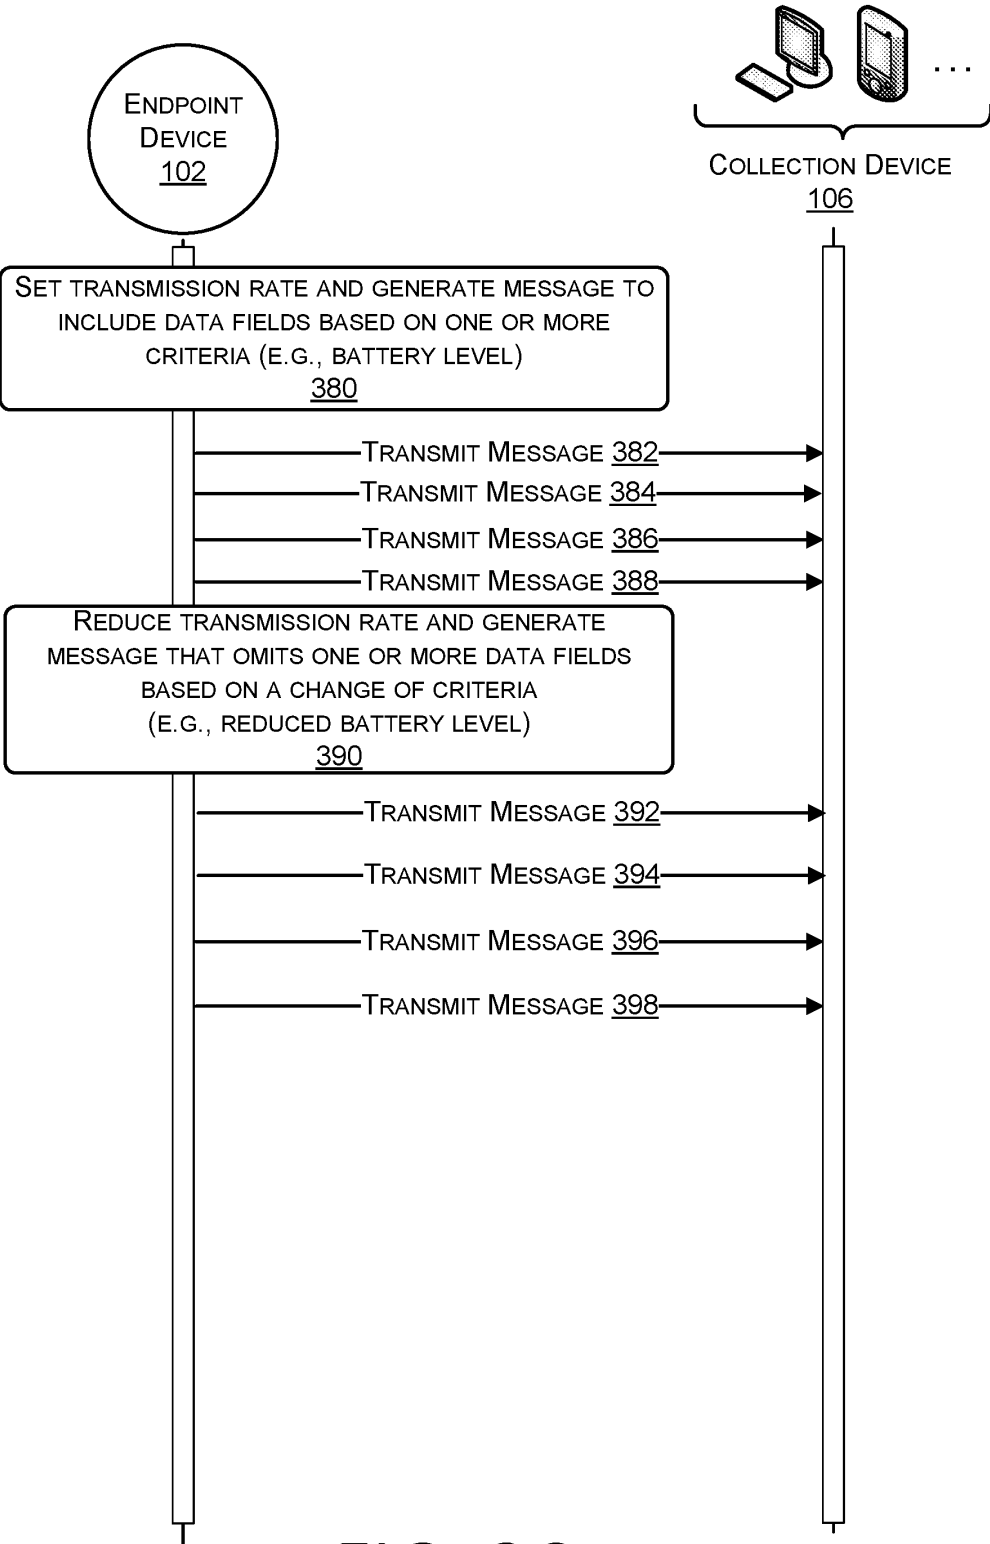


FIG. 3C

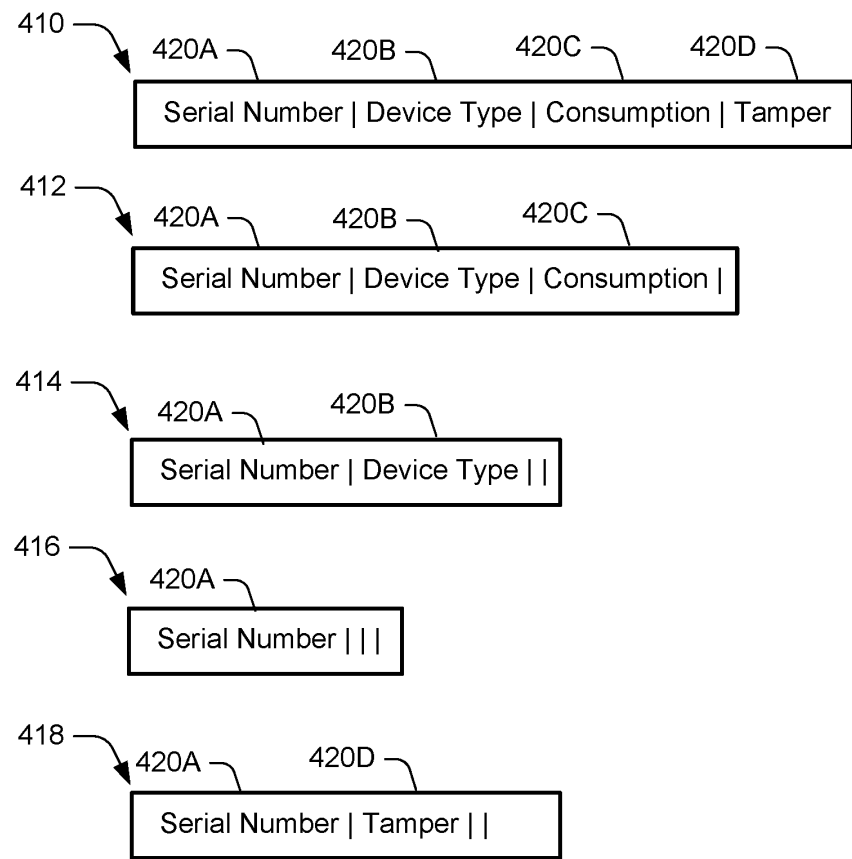


FIG. 4A

450

452		454	456	458
Field #	Field Name	Length(bits)	Value	
1	Preamble	32	0x5555904E	
2	Protocol ID	8	(See 460)	
3	Endpoint Type and Subtype	8	*	
4	Endpoint Serial Number	32	*	
5	Current Consumption	32	*	
6	Tamper/Flags	16	*	
7	CRC-16	16	*	

460

Message A (18 Bytes) – Fields 1-7

Message B (16 Bytes) – Fields 1-5, and 7

Message C (12 Bytes) – Fields 1-4, and 7

Message D (11 Bytes) – Fields 1, 2, 4, and 7

Message E (14 Bytes) – Fields 1-4, and 6, 7

Protocol ID Value (0x06)

Protocol ID Value (0x07)

Protocol ID Value (0x08)

Protocol ID Value (0x09)

Protocol ID Value (0x0A)

FIG. 4B

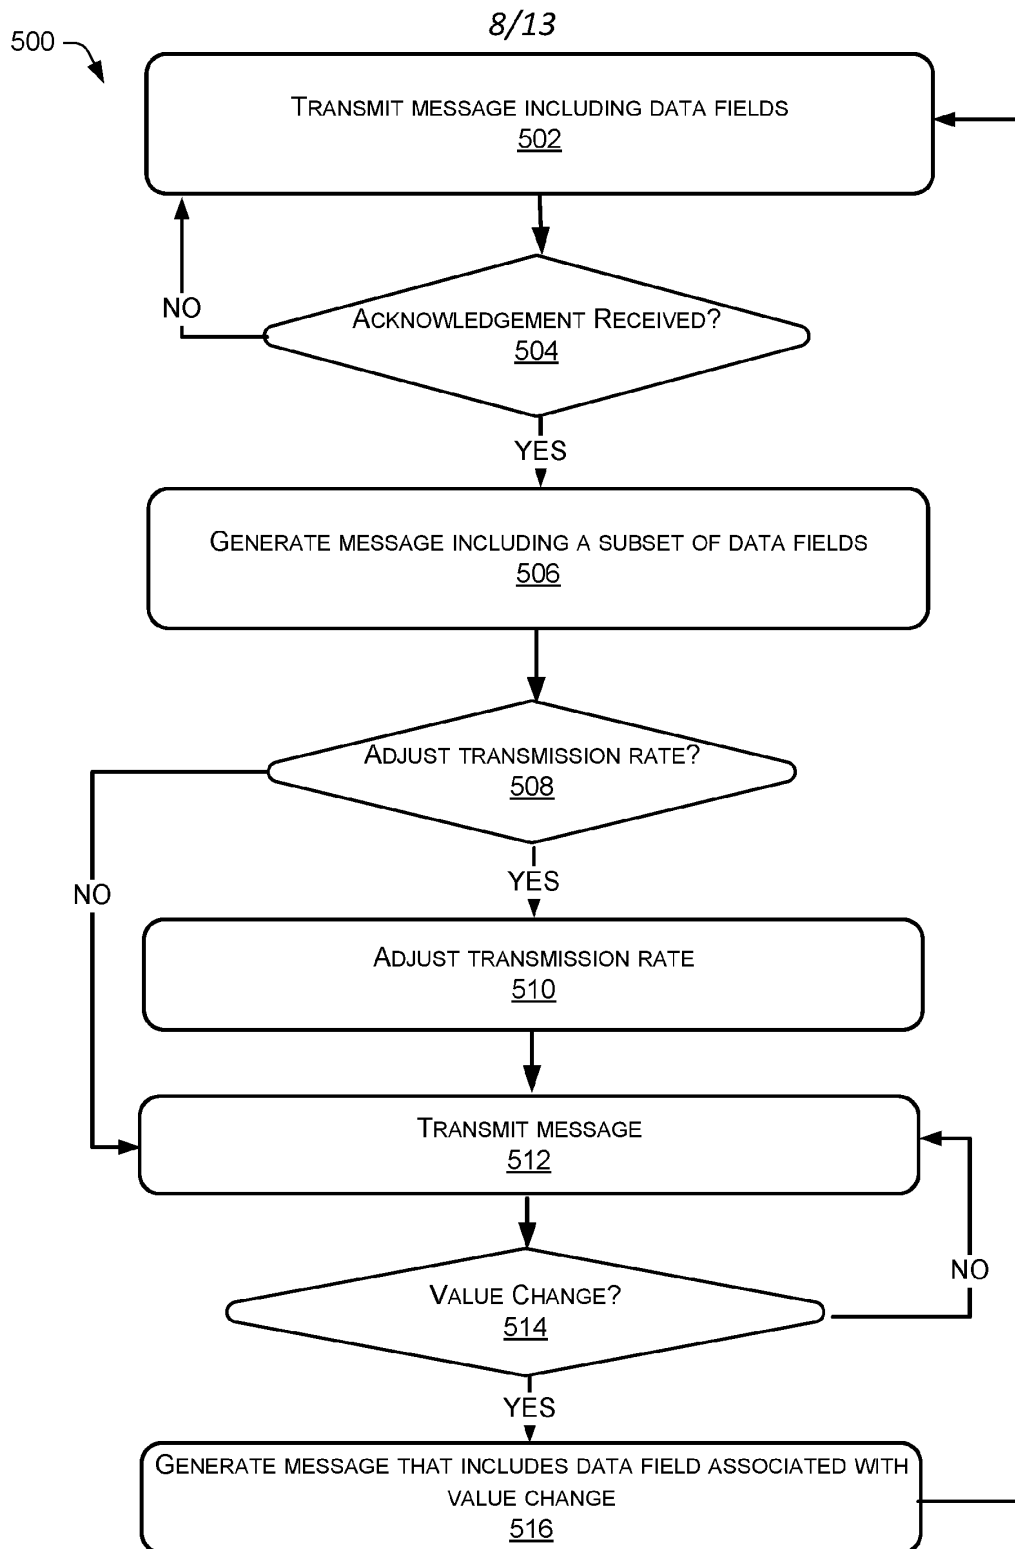


FIG. 5

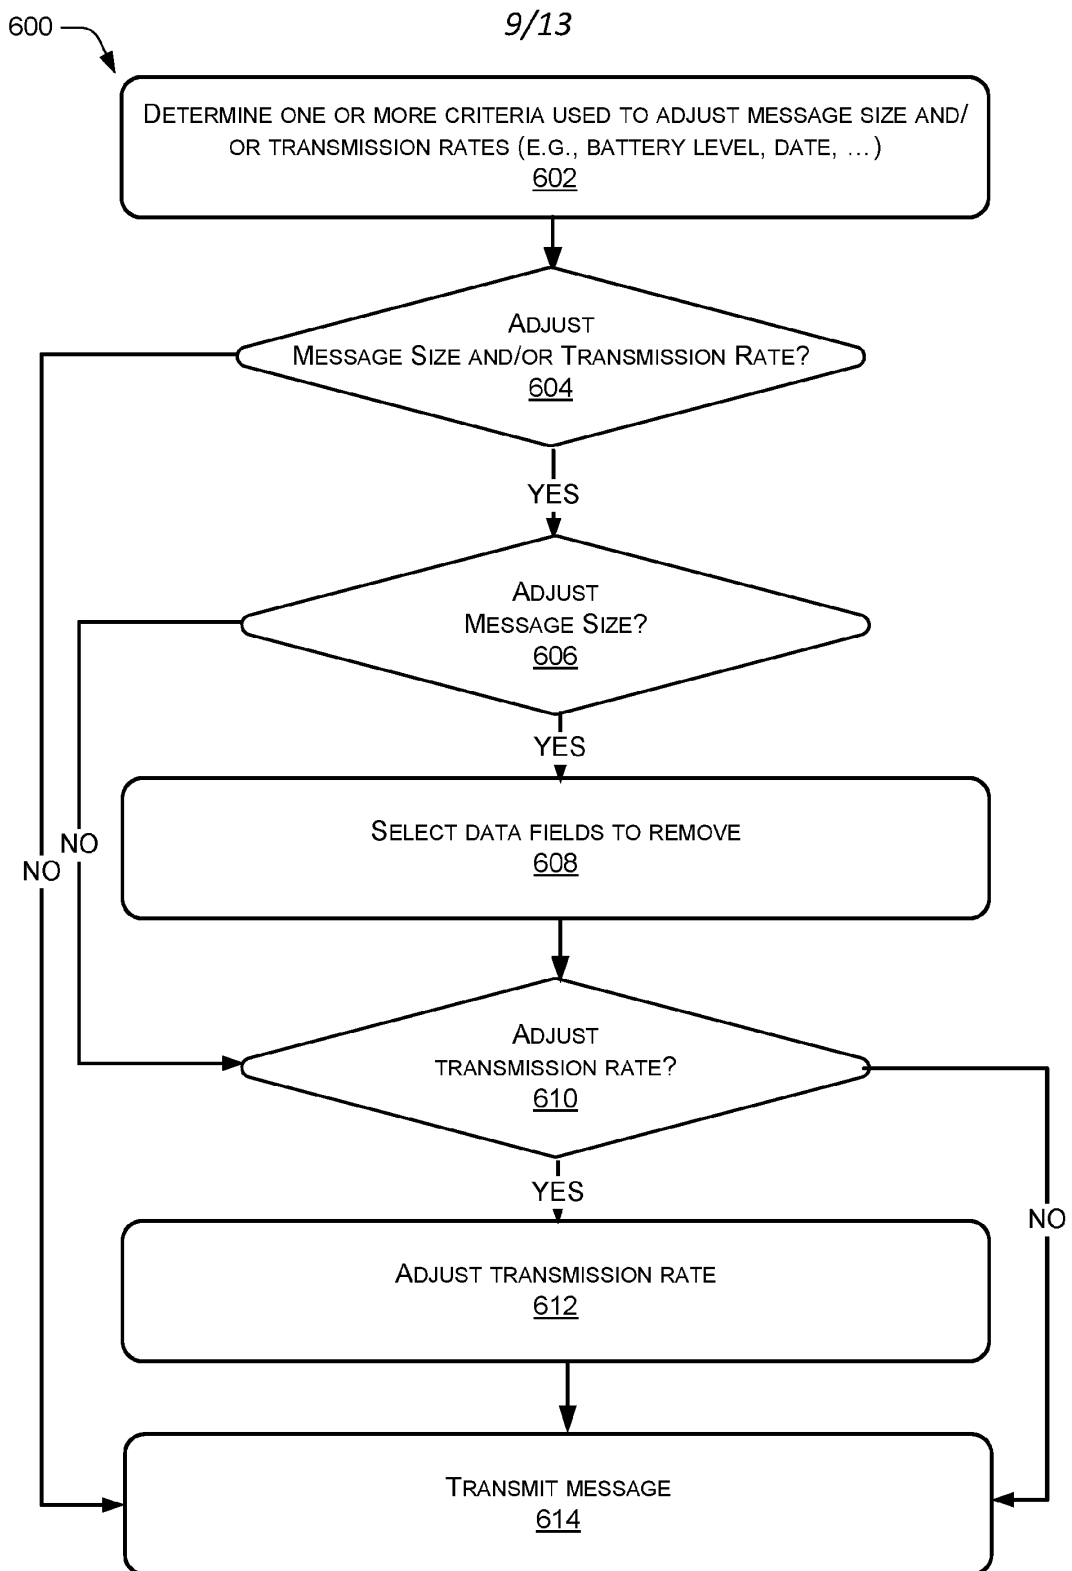


FIG. 6

10/13

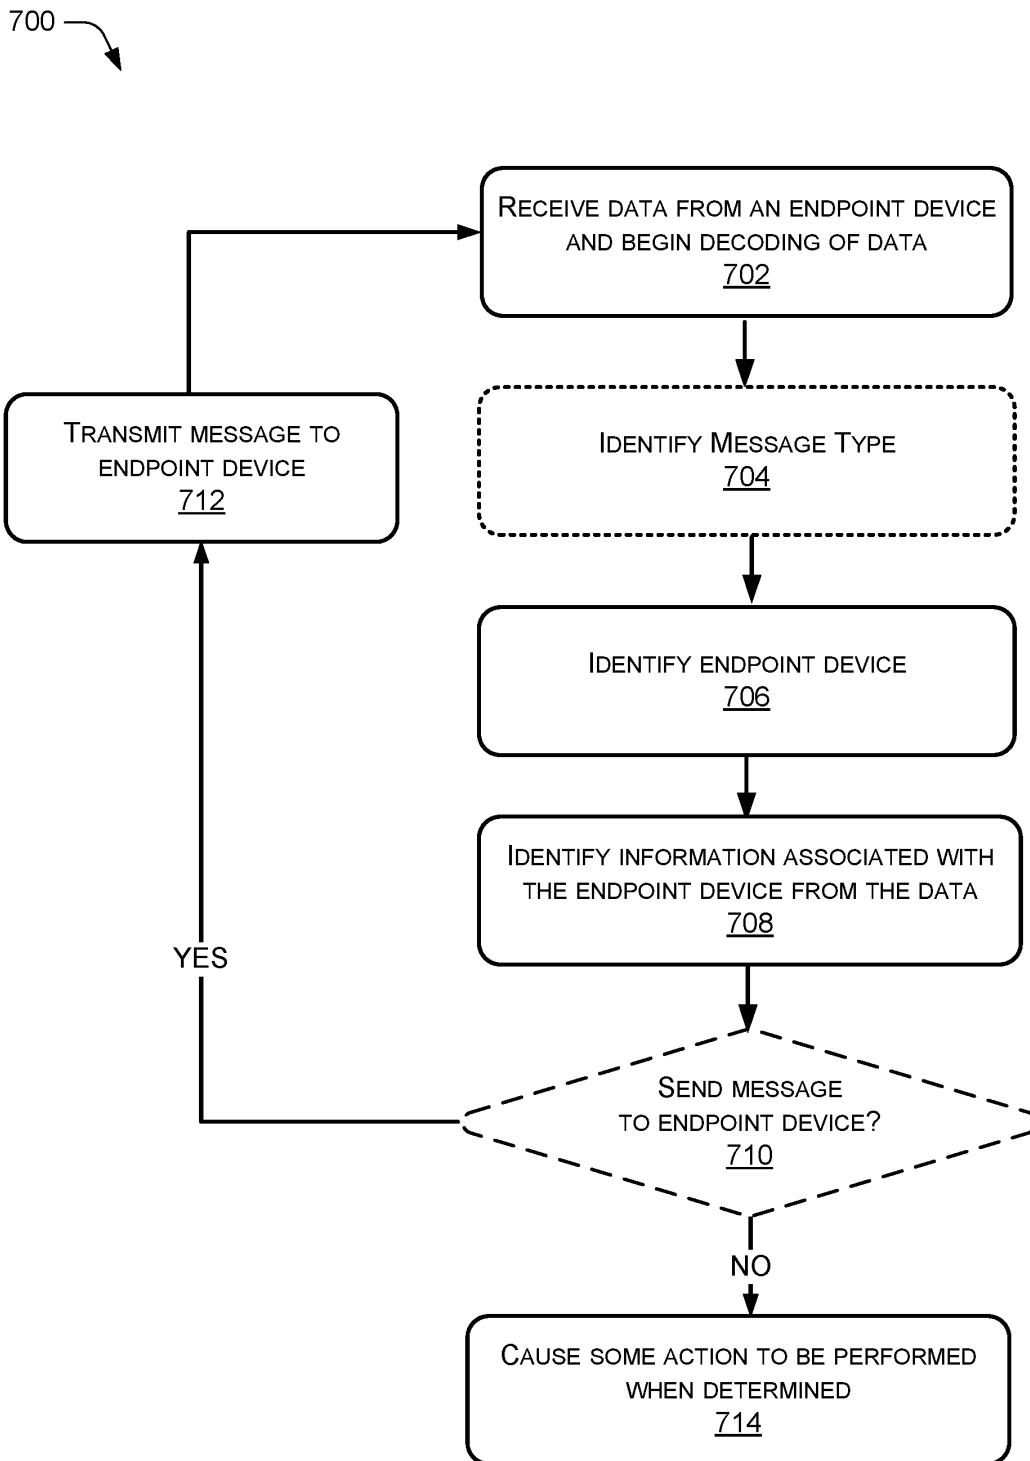


FIG. 7

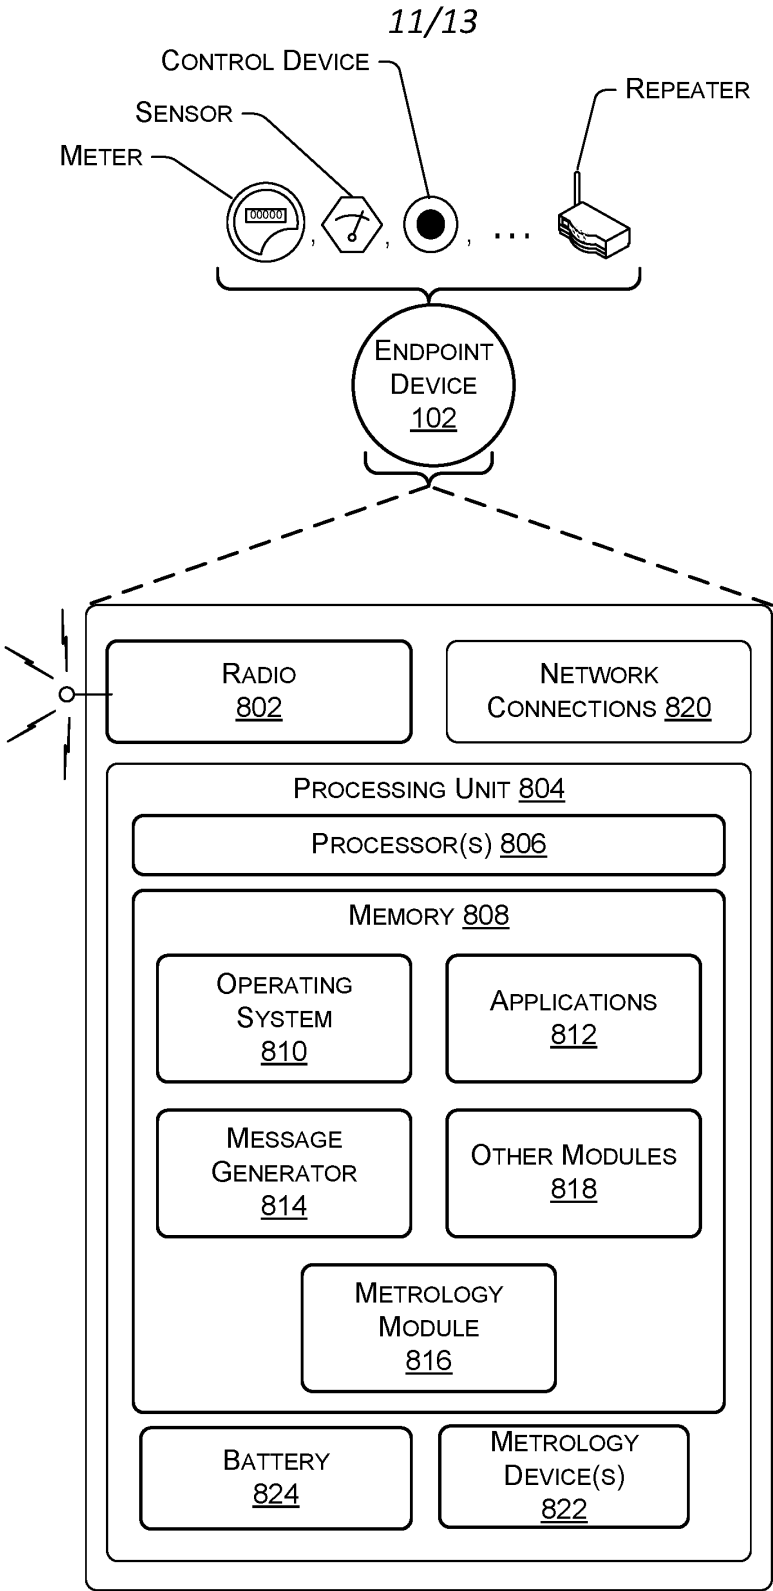


FIG. 8

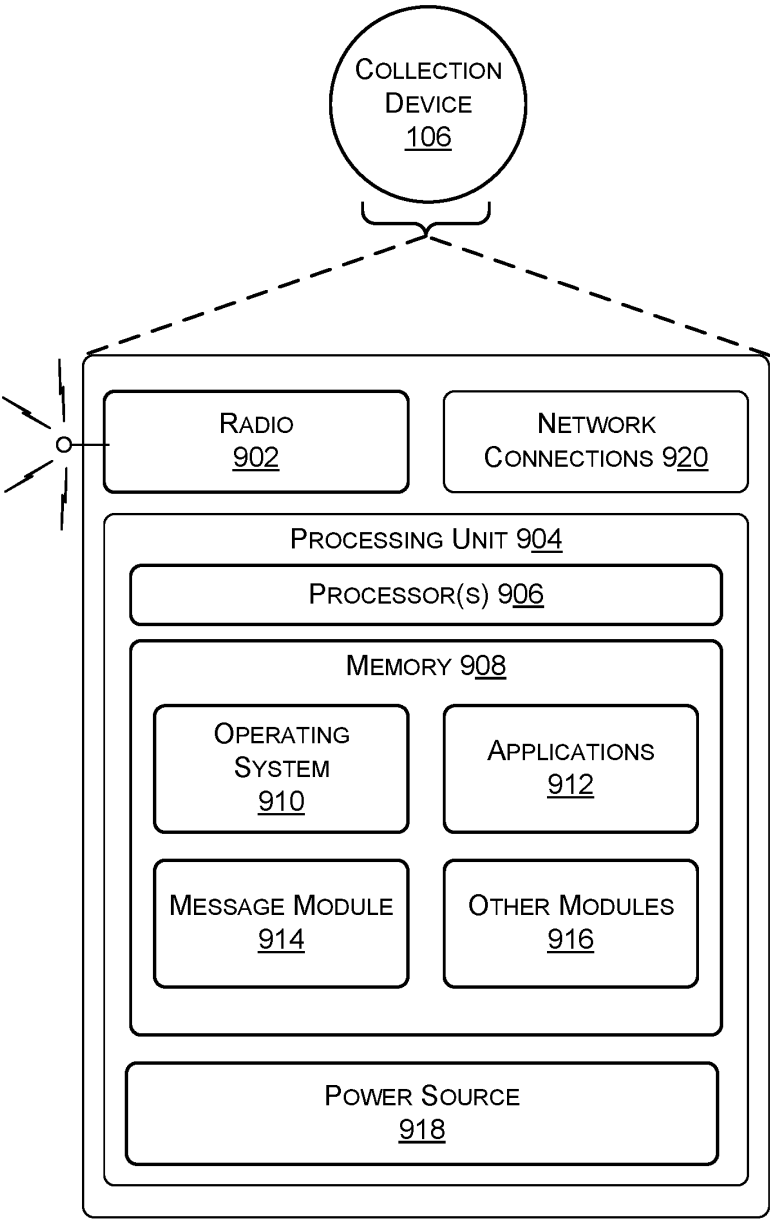


FIG. 9

13/13

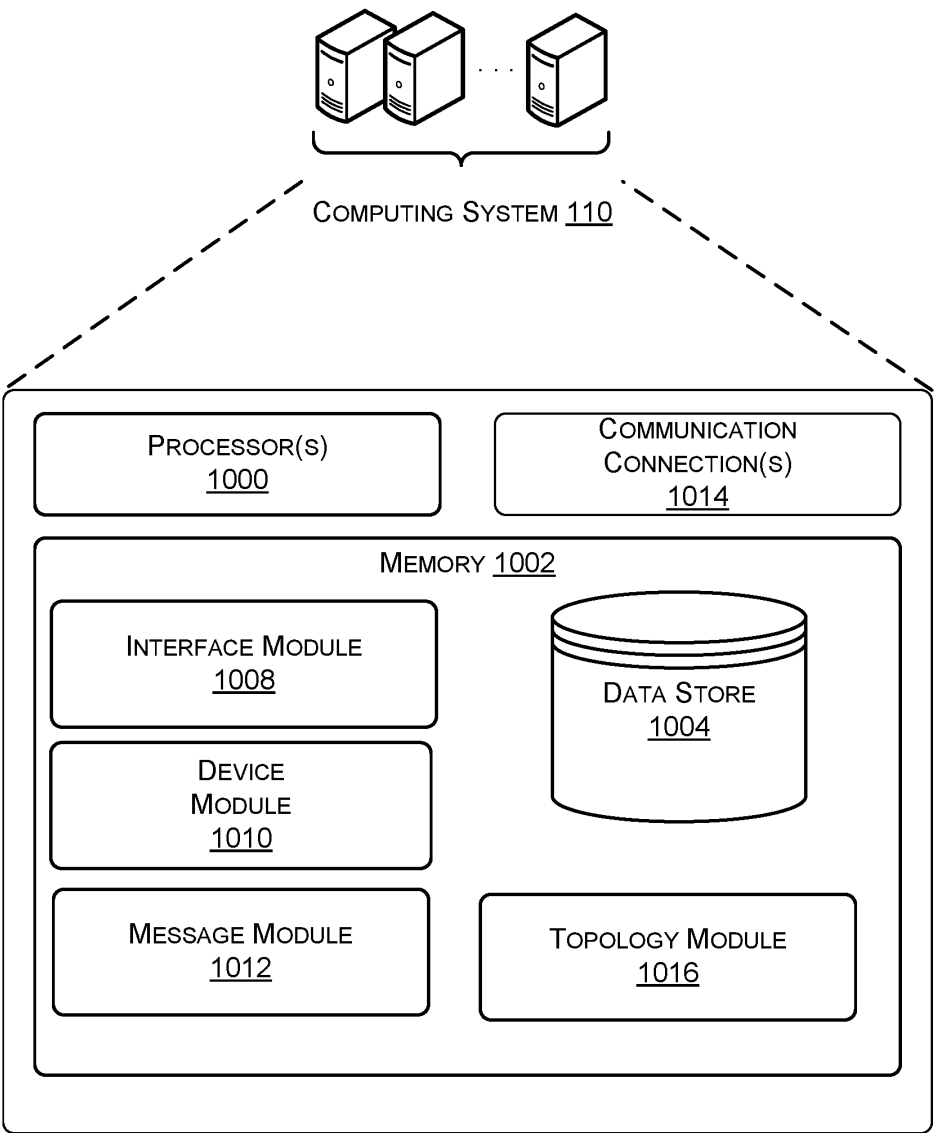


FIG. 10