




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B29C 45/14, B32B 1/04, E06B 3/24		A1	(11) International Publication Number: WO 97/31769
			(43) International Publication Date: 4 September 1997 (04.09.97)
(21) International Application Number: PCT/US97/03040		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 26 February 1997 (26.02.97)		Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(30) Priority Data: 08/607,896 27 February 1996 (27.02.96) US			
(71) Applicant: TREMCO INCORPORATED [US/US]: 3735 Green Road, Beachwood, OH 44122 (US).			
(72) Inventors: BARATUCI, James, Lynn; 3840 Kenwood Drive, Stow, OH 44224 (US). BUCHANAN, Ronald, Ellsworth; 1961 West Wallings Road, Broadview Heights, OH 44147 (US). FERRI, Louis, Anthony; 10223 Greenhaven Parkway, Brecksville, OH 44141 (US). RITZ, Lanny Dean; 1248 East Avenue, Tallmadge, OH 44278 (US).			
(74) Agent: LONGMUIR, Jeanne, E.; Calfee, Halter & Griswold L.L.P., 1400 McDonald Investment Center, 800 Superior Avenue, Cleveland, OH 44114-2688 (US).		REPLACED SHEETS SG ☐ Description : paged to paged ☒ Claim(s) : paged 33 to paged 43 ☐ Drawing(s) : paged to paged ☐ Abstract : paged to paged	

(54) Title: **PREFORMED FLEXIBLE LAMINATE**

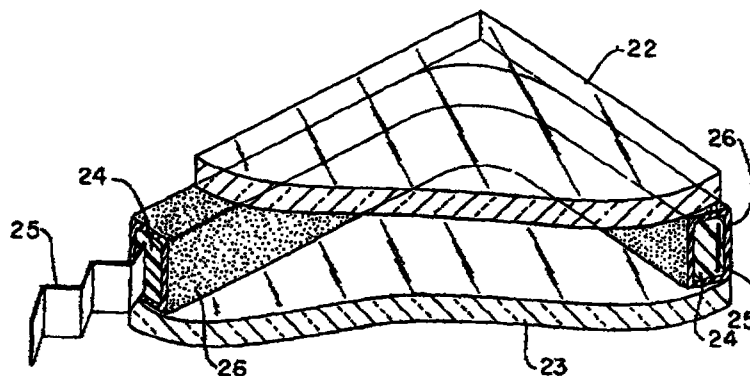

(57) Abstract

A composite structure comprising a preformed flexible laminate in adhering contact with at least a first and second transparent or translucent panel members (22, 23) such as would be useful as an insulated glass unit. The flexible laminate contains an undulating spacer element (25) either partially or totally embedded within a core material (24) and has a polymeric coating (26) on at least one surface thereof. The flexible laminate effectively seals the interior of the panel structure from air and/or moisture and maintains a desired distance between the panels (22, 23). A multi-cavity extrusion die for forming the preformed flexible laminate has a core cavity for receiving the core material (24) as well as the undulating continuous spacer element (25). Converging walls within the core cavity serve to embed at least one side of the spacer element (25) in the core material (24) and a land area forms a desired shape or configuration wherein the spacer element (25) undulation is maintained. At least one polymeric feed cavity located downstream from said core cavity and said land area applies a polymeric film or coating (26) to at least a surface of the embedded spacer element (25). A plurality of optional feed cavities can apply the same or different polymers to additional surfaces of the embedded spacer element (25) and can totally cover or encapsulate the same.