

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 May 2002 (23.05.2002)

PCT

(10) International Publication Number
WO 02/040806 A3

(51) International Patent Classification⁷: **E01C 11/02**, 7/06

(21) International Application Number: PCT/US00/30137

(22) International Filing Date:
14 November 2000 (14.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **LU, Eric, Chia-Chun** [US/US]; No. 3583 Briargrove Lane, Dallas, TX 75287 (US).

(71) Applicant and

(72) Inventor: **LU, Chia-Lung** [CN/CN]; Suite 5, 4th floor, No. 187 Dade 2nd Road, Gangshan Jen, Kaohsiung 820 (CN).

(74) Agents: **KENNEY, J., Ernest** et al.; Bacon & Thomas, PLLC, 625 Slaters Lane, 4th Floor, Alexandria, VA 22314 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
7 November 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESSES OF FINISHING SLITS OF SURFACE LAYER OF AIRPLANE RUNWAY

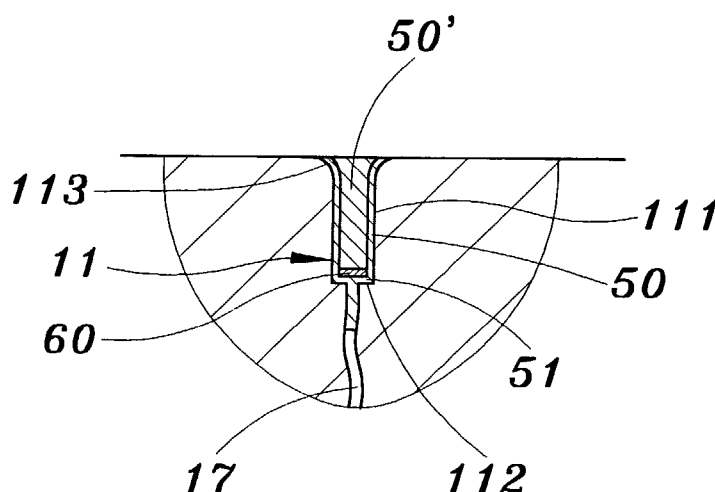

(57) Abstract: A process of finishing slits in the surface layer of a runway involves a first step in which a slit (11) is heated such that the surface of the slit (11) is dry, and that the capillary holes of the slit (11) are opened up. The surface of the slit (11) is then provided with a coating (50) of an asphalt synthetic agent. The coating (50) is subsequently heated to cause the molecules of the asphalt synthetic agent to diffuse into the capillary holes of the slit (11), thereby preventing water from finding its way into the gradation layer (A) of the runway. The slit (11) is provided with a soft interface (60) capable of preventing the water from finding its way into the slits of the surface layer of the runway. The soft interface (60) is securely attached to the slits.



WO 02/040806 A3