



- (51) **International Patent Classification:**
E04B 1/70 (2006.01) *F26B 21/00* (2006.01)
F26B 9/02 (2006.01)
- (21) **International Application Number:**
PCT/GB2014/000185
- (22) **International Filing Date:**
15 May 2014 (15.05.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1308731.7 15 May 2013 (15.05.2013) GB
- (72) **Inventor; and**
- (71) **Applicant : JOYNSON, Graeme** [GB/GB]; 1 Owthorne Grange, Withernsea HU19 2ES (GB).
- (74) **Agent: WALKER, Neville;** ipconsult, 21a Commercial Road, Swanage BH19 1DF (GB).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
— with amended claims (Art. 19(1))

(54) **Title:** A FLUID MOVEMENT DEVICE

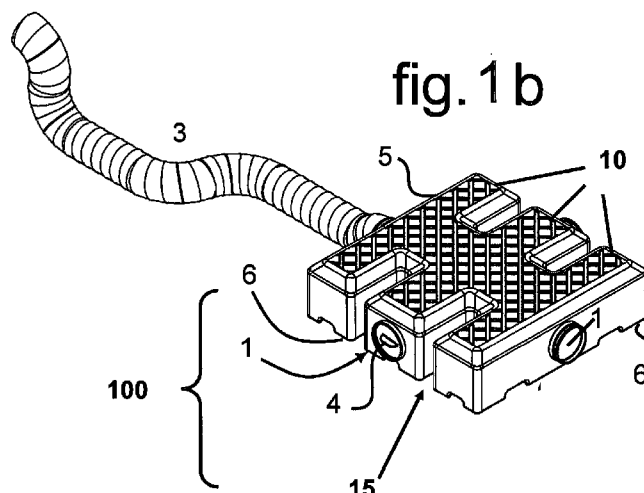

(57) **Abstract:** According to the present invention there is provided a fluid movement device suitable for drying adjacent surfaces such as floors, walls or ceilings or items such as furniture, in which the device comprises an inlet for receiving pressurised fluid, and at least one vent to direct said fluid towards said surfaces or items, and at least one pathway to allow escape of humid air generated through drying from the surface being dried to the surrounding environment.