



(43) International Publication Date
13 December 2012 (13.12.2012)

- (51) International Patent Classification:
F41H 3/00 (2006.01)
- (21) International Application Number:
PCT/SE2012/050601
- (22) International Filing Date:
5 June 2012 (05.06.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1150517-9 7 June 2011 (07.06.2011) SE
- (71) Applicant (for all designated States except US): **BAE SYSTEMS HÄGGLUNDS AKTIEBOLAG** [SE/SE]; S-891 82 Örnköldsvik (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SJÖLUND, Peder** [SE/SE]; Karosserivägen 3, S-891 41 Örnköldsvik (SE).
- (74) Agent: **ALBIHNS.ZACCO AB**; P.O. Box 5581, Valhallavägen 117, S-114 85 Stockholm (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) Title: DEVICE FOR SIGNATURE ADAPTATION AND OBJECT PROVIDED WITH SUCH A DEVICE

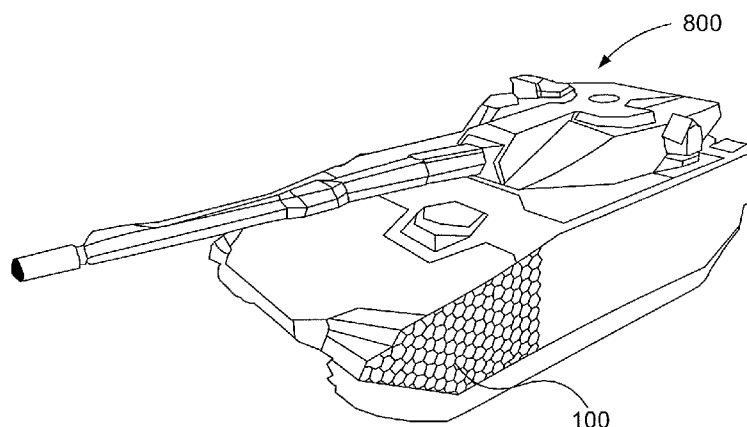


Fig. 3a

(57) Abstract: The invention pertains to a device for signature adaptation, comprising at least one surface element (100; 300; 500) arranged to assume a determined thermal distribution, wherein said surface element comprises at least one temperature generating element (150; 450a, 450b, 450c) arranged to generate at least one predetermined temperature gradient to a portion of said at least one surface element. Said at least one surface element (100; 300; 500) comprises at least one radar suppressing element (190), wherein said at least one radar suppressing element (190) is arranged to suppress reflections of incident radio waves. The invention also concerns an object provided with a device for signature adaptation.



WO 2012/169958 A1