



- (51) International Patent Classification:
B05B 13/04 (2006.01) *F16L 58/18* (2006.01)
F16L 13/02 (2006.01)
- (21) International Application Number:
PCT/NL2013/050052
- (22) International Filing Date:
31 January 2013 (31.01.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2008206 31 January 2012 (31.01.2012) NL
- (71) Applicant: **BLUEMARINE OFFSHORE YARD SERVICE B.V.** [NL/NL]; Ophemertstraat 85, NL-3089 JD Rotterdam (NL).
- (72) Inventors: **KRUTZEN, Martijn Paulus Maria**; Hovenierstraat 30, NL-2613 RN Delft (NL). **STEENHUIS, André Luur Jan**; Rodenrijseweg 305, NL-2651 BS Berkel en Rodenrijs (NL).
- (74) Agent: **LOUWAARD, Jan-Willem Paul**; Sweelinckplein 1, NL-2517 GK Den Haag (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE AND METHOD FOR THE COATING OF A SURFACE AREA OF A GAP IN THE COATING OF A PIPELINE

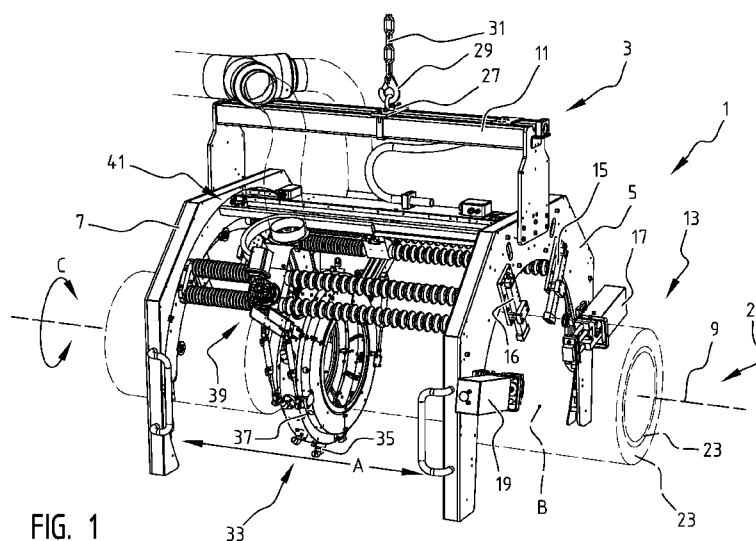


FIG. 1

(57) Abstract: The present invention is for coating a surface area of a gap in the coating of a pipeline, said surface area having a length along the central longitudinal axis of the pipeline and a width of at least part of the circumference of the pipeline. The device according to the invention comprises: • a frame (3); • a spray nozzle support element (33) supporting a number of spray nozzles (35); • a linear motion mechanism (39) configured for translating the spray nozzle support element relative to the frame and parallel to a longitudinal axis of the frame (9); and • support members (15, 16, 17, 19) configured for arranging the frame stationary relative to the pipeline (13) with said longitudinal axis of said frame coinciding with the central longitudinal axis (9) of the pipeline;