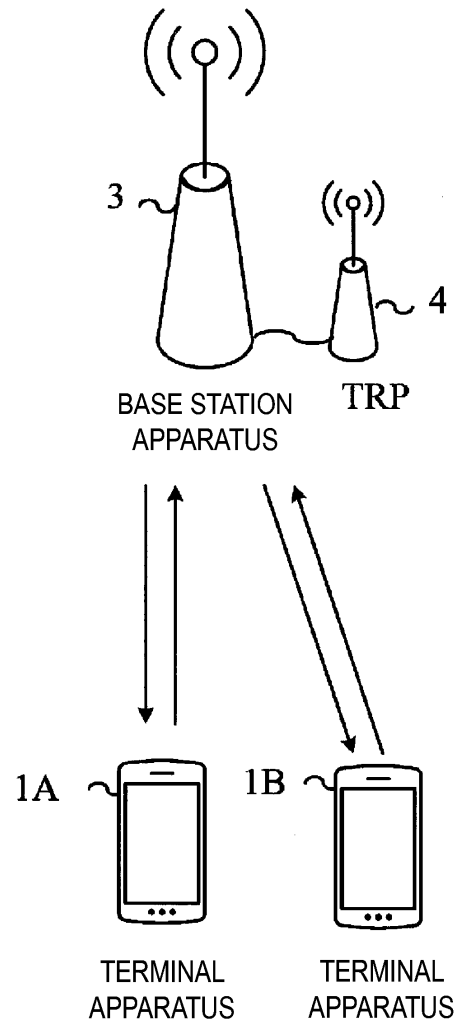
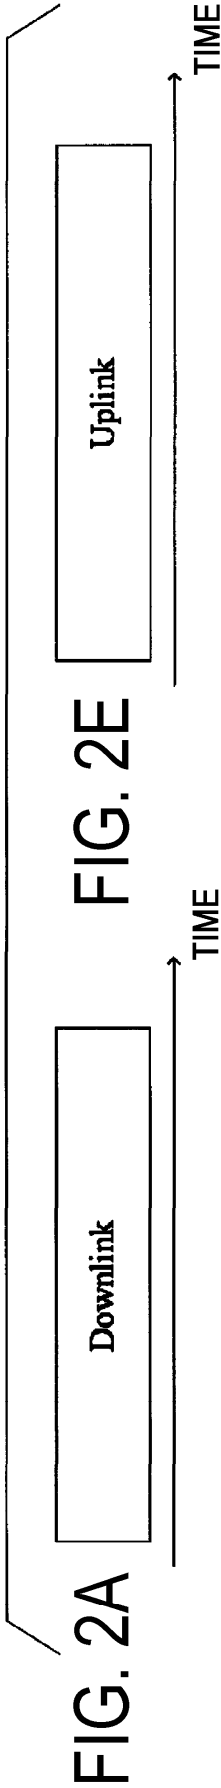
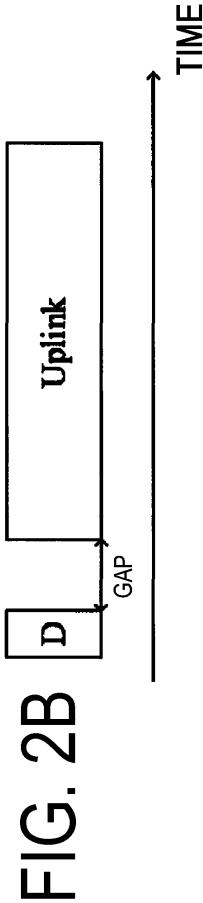
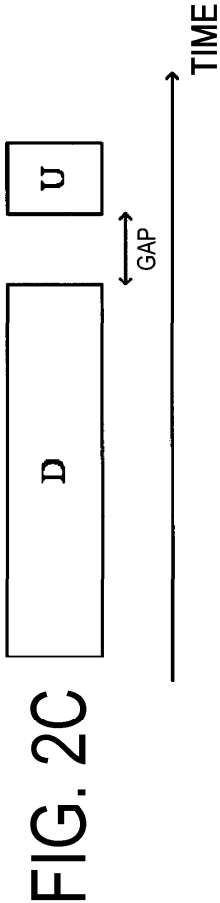
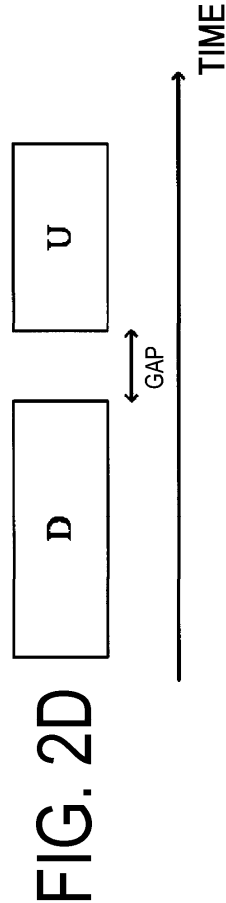
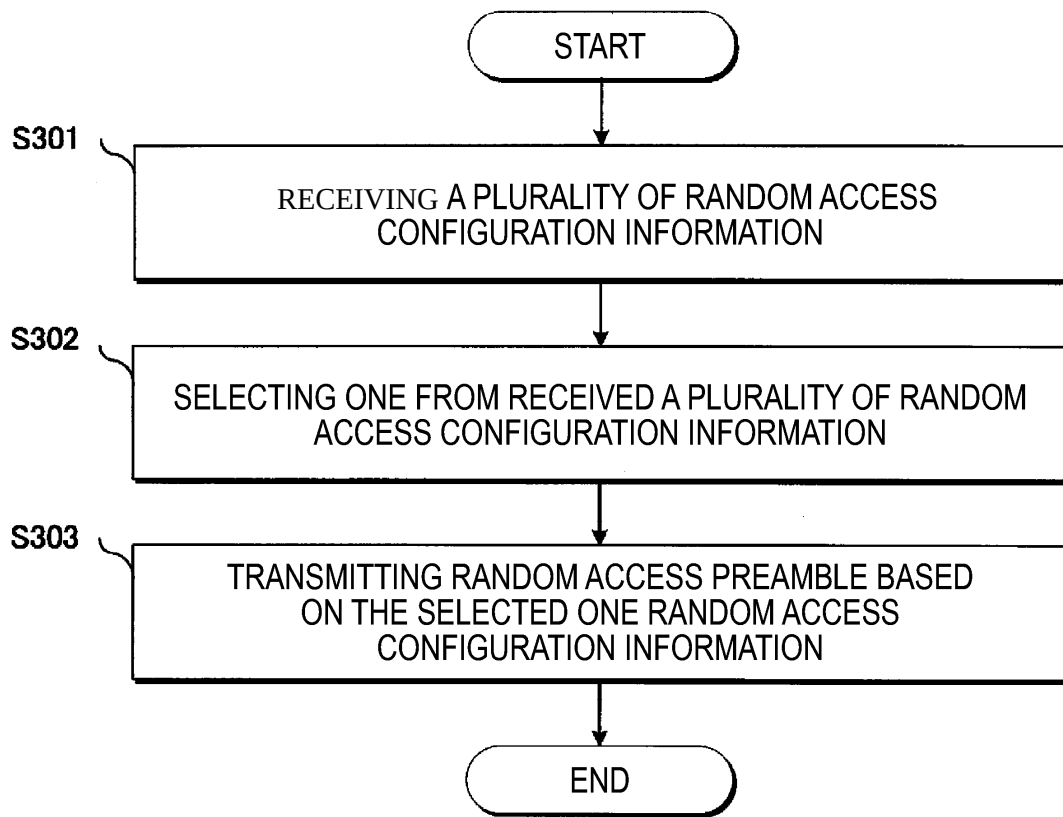
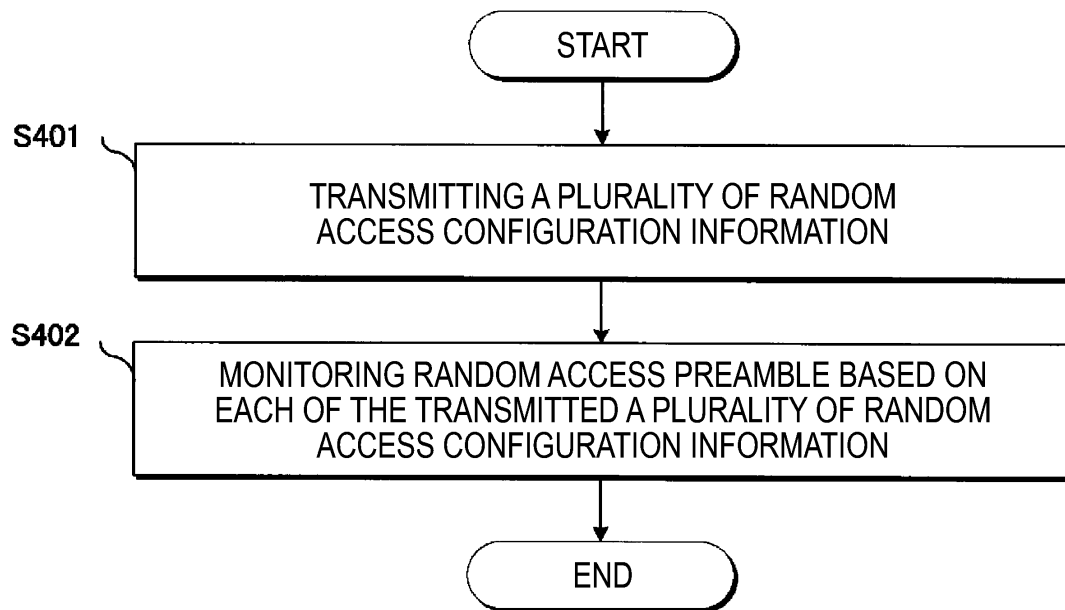


**FIG. 1**



**FIG. 3**

**FIG. 4**

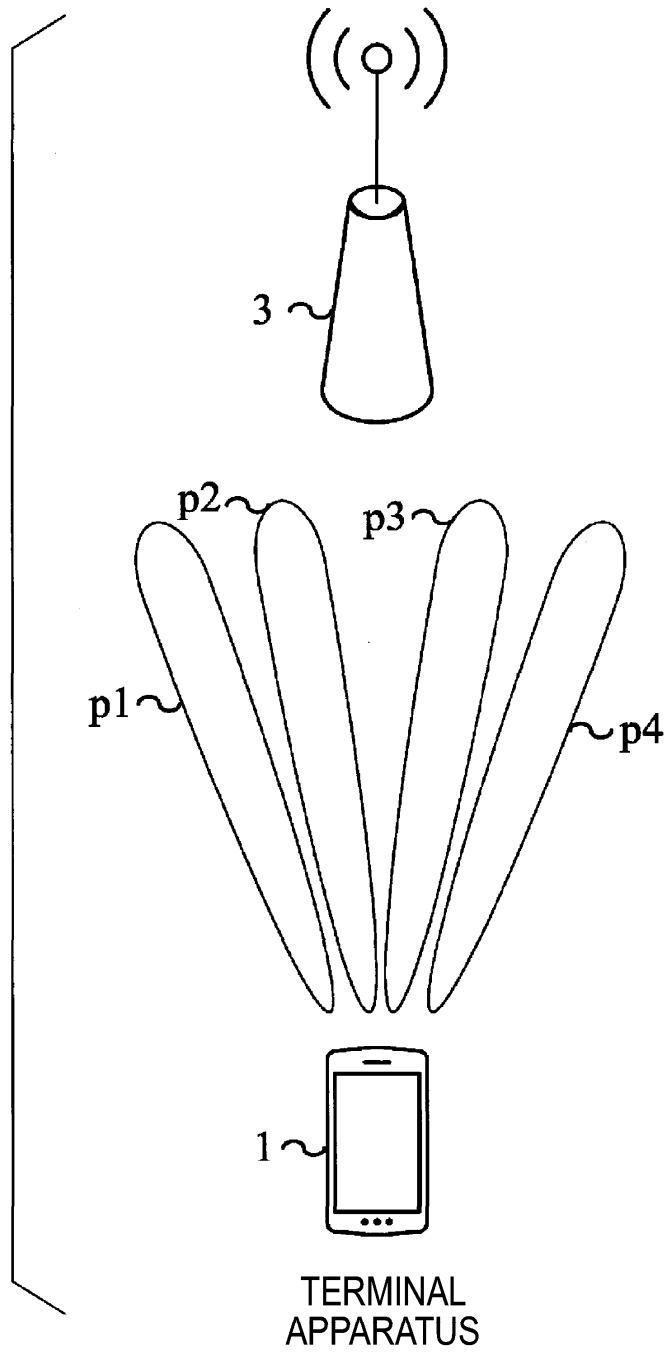
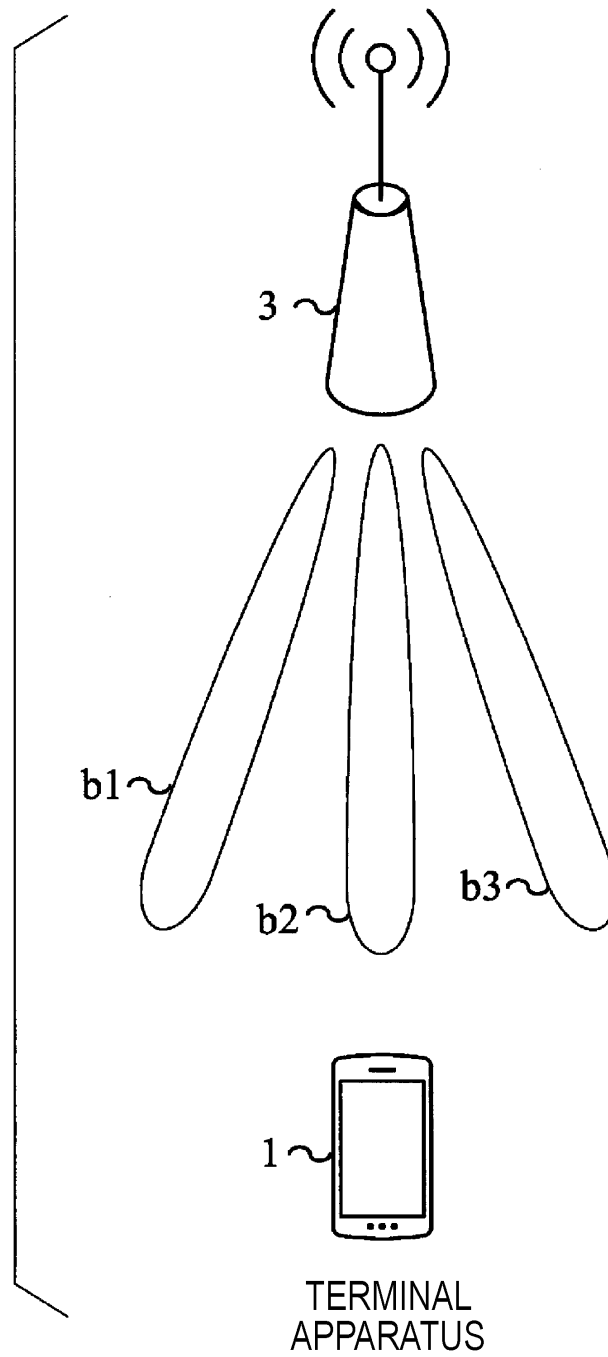


FIG. 5

**FIG. 6**

BEAM USED BY DOWNLINK SIGNAL THAT RECEIVED RANDOM ACCESS CONFIGURATION INFORMATION	INDEX OF AVAILABLE UPLINK PRECODING
b1	I_{p1}, I_{p2}
b2	I_{p2}, I_{p3}
b3	I_{p3}, I_{p4}

FIG. 7

PRACH CONFIGURATION INDEX	AVAILABLE SUBFRAME NUMBER
0	i_1
1	i_2
2	i_3
3	i_4

FIG. 8

INDEX OF UPLINK PRECODING	PRACH CONFIGURATION INDEX
I_{p1}	3
I_{p2}	1
I_{p3}	2
I_{p4}	0

FIG. 9

PRACH CONFIGURATION INDEX	INDEX OF UPLINK PRECODING	AVAILABLE SUBFRAME NUMBER
0	I_{p1}	i_1
	I_{p2}	i_2
1	I_{p1}	i_3
	I_{p2}	i_4

FIG. 10

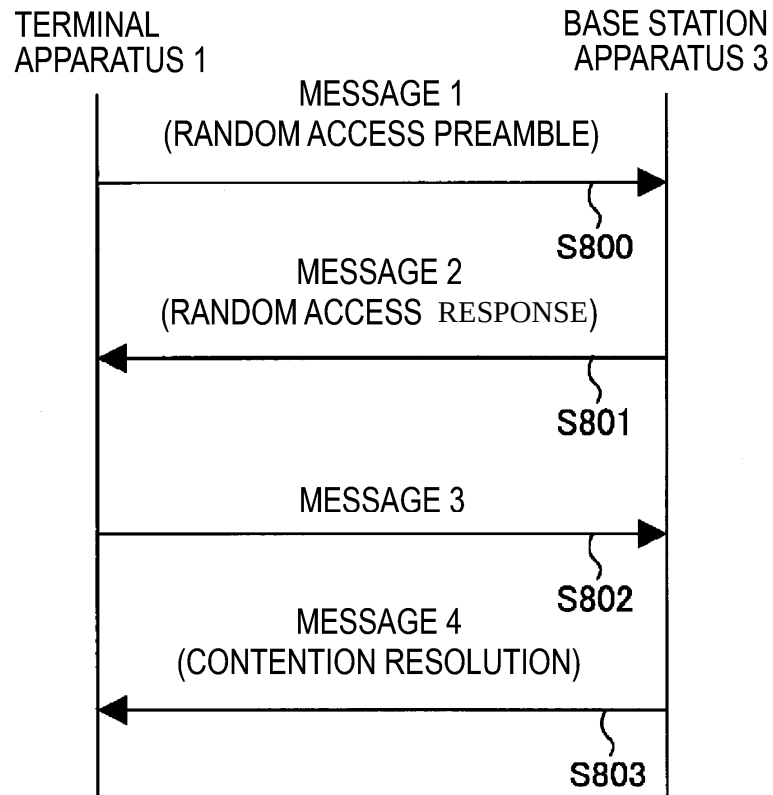
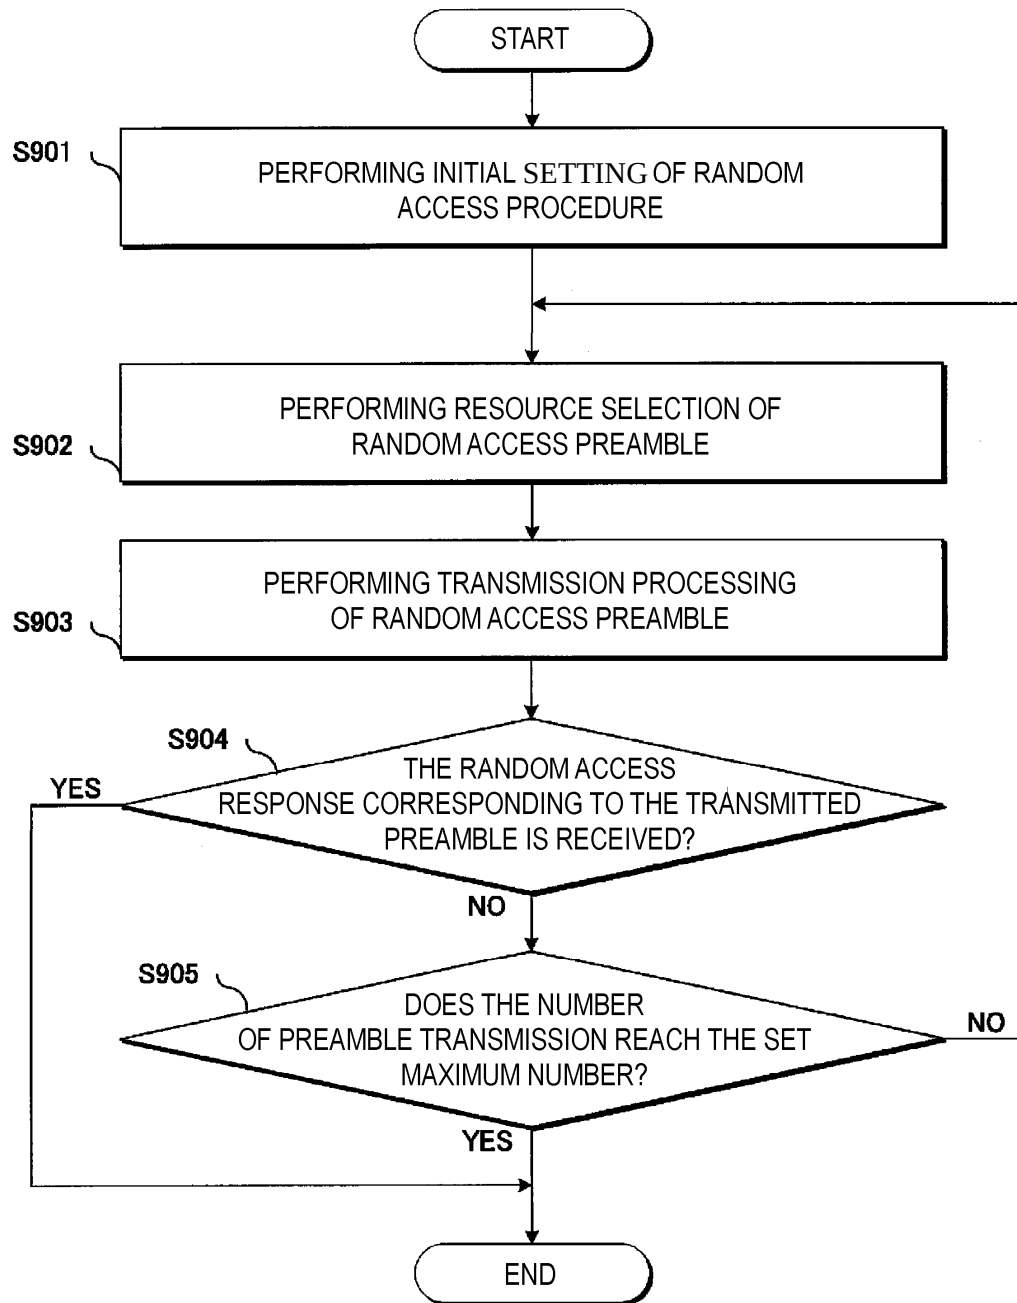
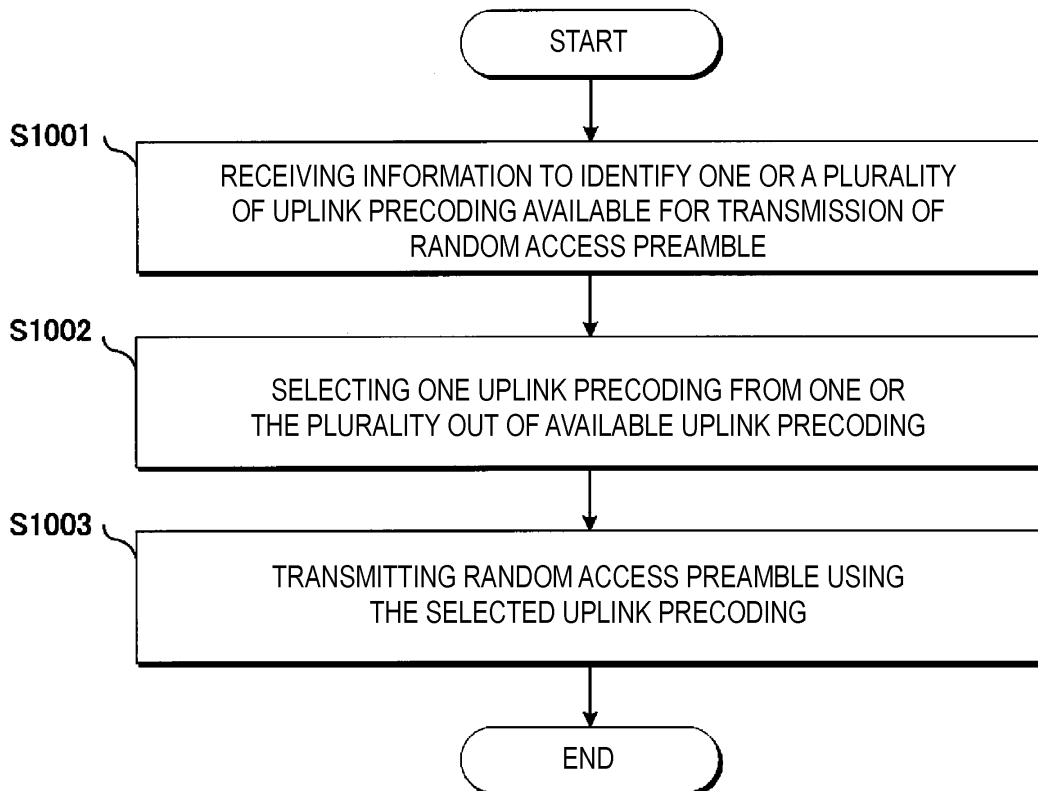


FIG. 11

**FIG. 12**

**FIG. 13**

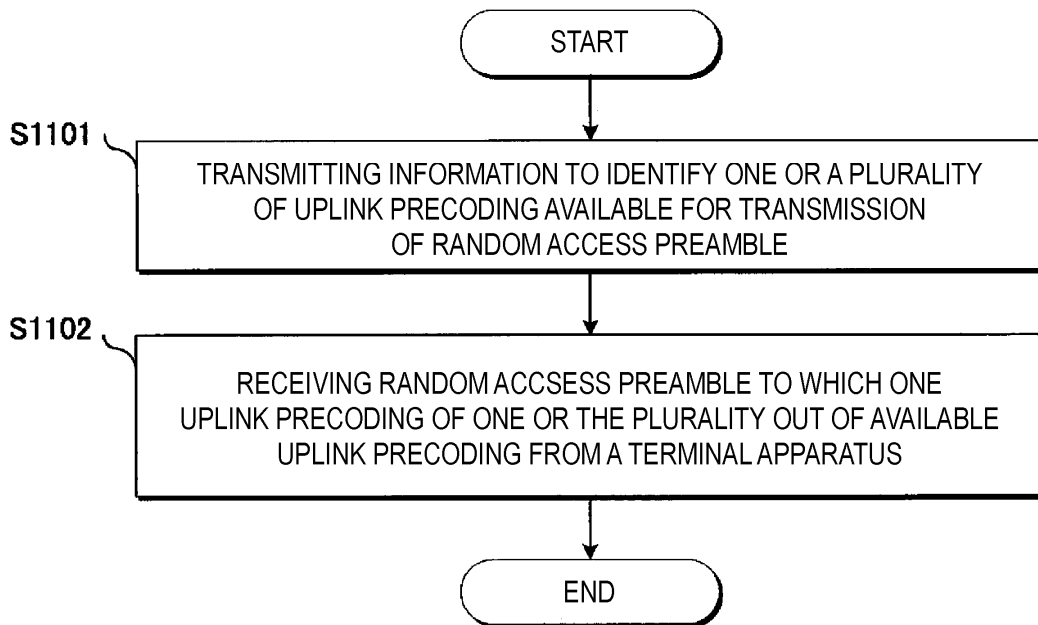
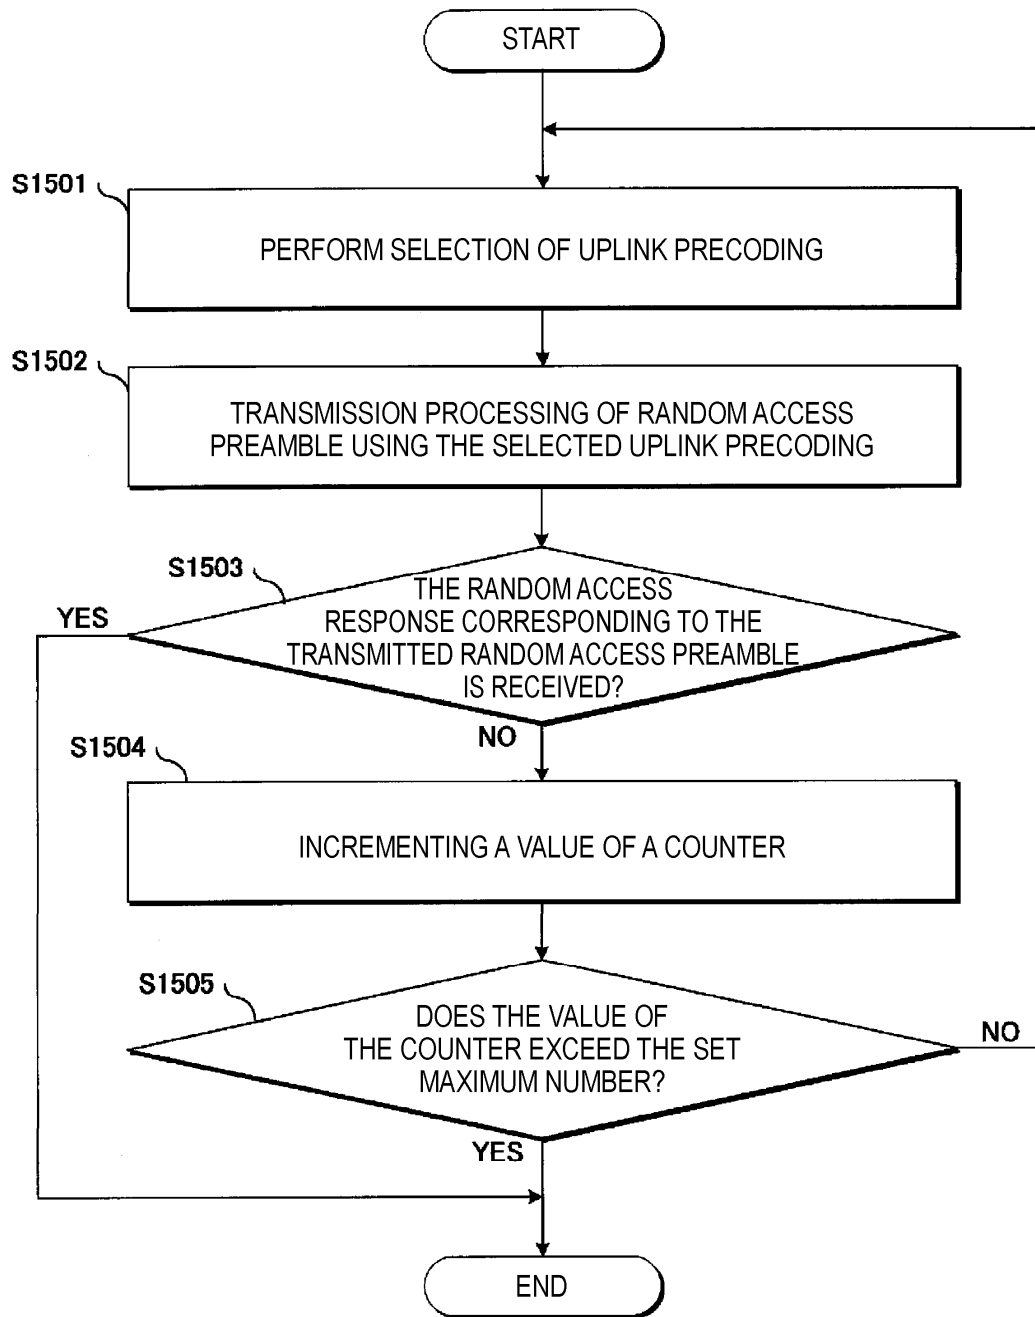


FIG. 14

**FIG. 15**

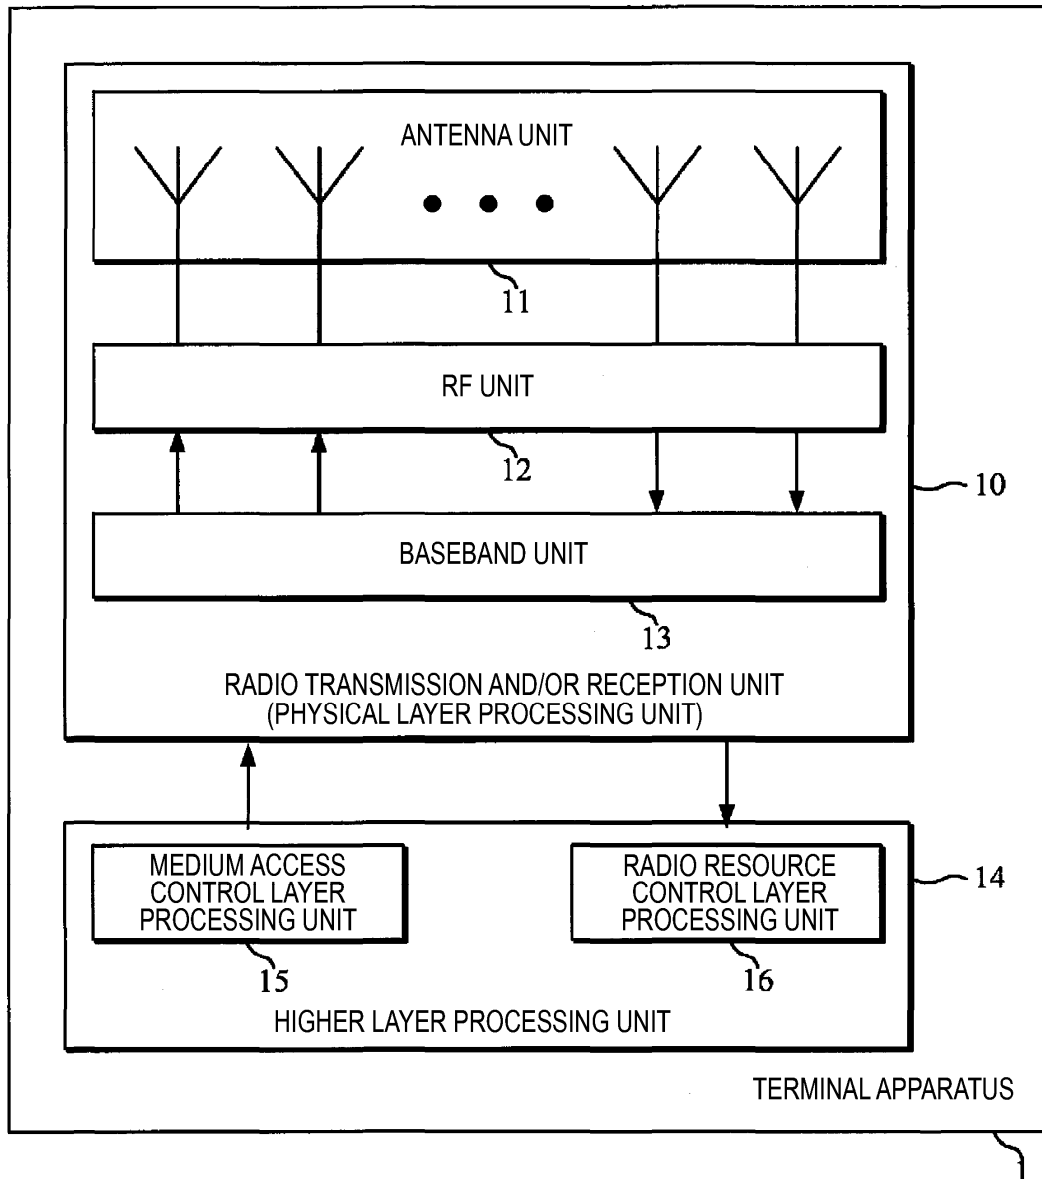


FIG. 16

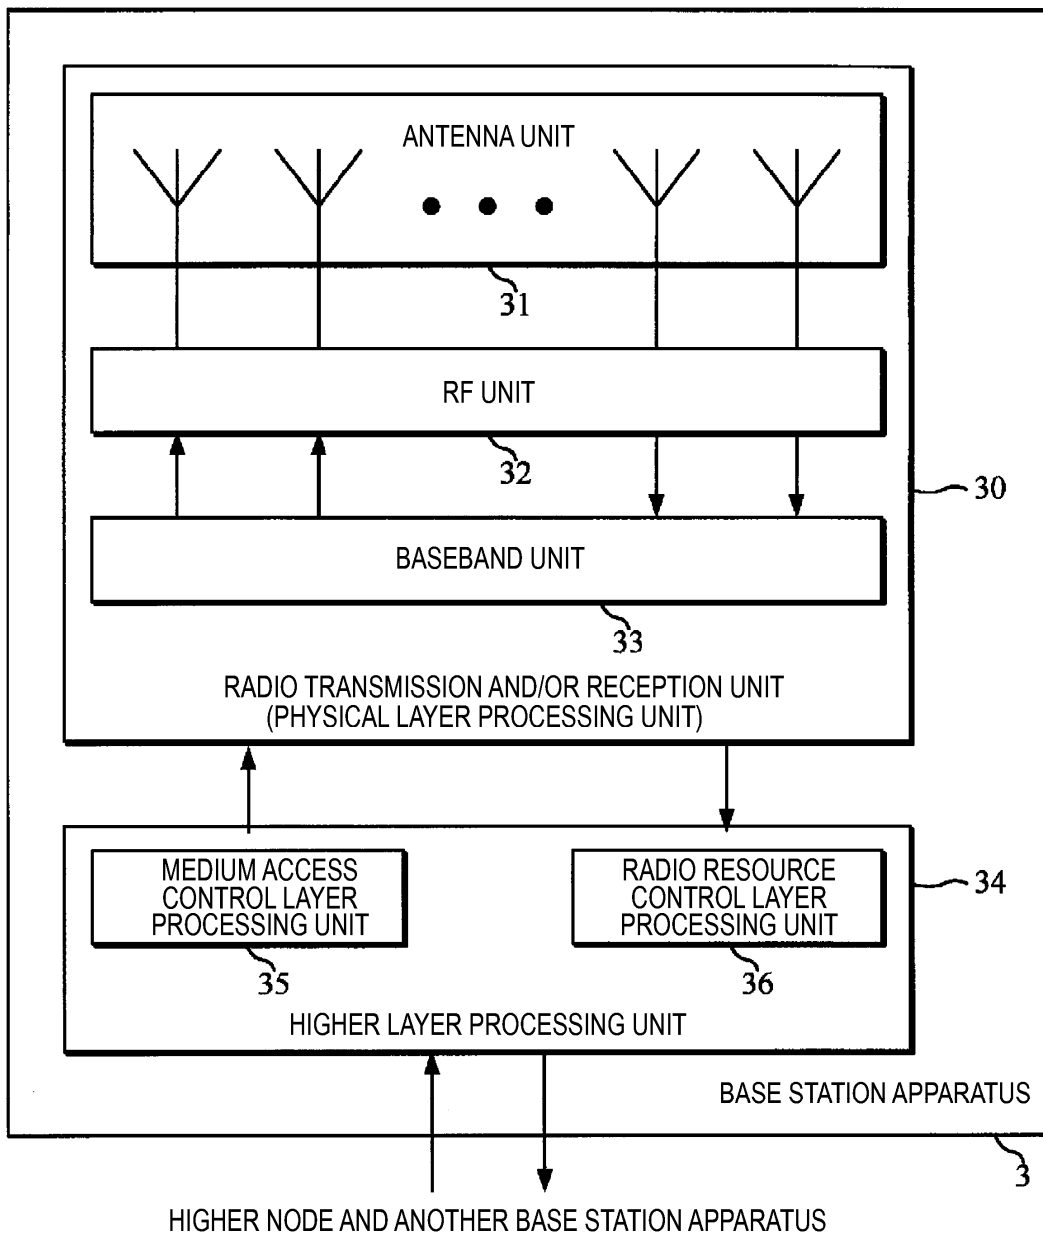


FIG. 17