

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
16 July 2009 (16.07.2009)

PCT

(10) International Publication Number
WO 2009/087430 A1

(51) International Patent Classification:

H04L 1/00 (2006.01) *H04Q 7/30* (2006.01)
H04L 29/08 (2006.01) *H04Q 7/32* (2006.01)

(74) Agent: DITTHAVONG, Phouphanomketh; Ditthavong
Mori & Steiner, P.C., 918 Prince Street, Alexandria, VA
22314 (US).

(21) International Application Number:

PCT/IB2008/000014

(22) International Filing Date: 4 January 2008 (04.01.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).(71) Applicant (for LC only): **NOKIA INC.** [US/US]; 6000 Connection Drive, Irving, TX 75039 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KASHIMA, Tsuyoshi** [JP/JP]; 645-40 Daimura-cho, Midori, Yokohama 226-0014 (JP). **MALKAMAKI, Esa** [FI/FI]; Riippakaivuntie 17B, FIN-02130 Espoo (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: DUMMY PADDING SUB-HEADER IN MAC PROTOCOL DATA UNITS

(57) Abstract: An approach is provided for padding a protocol data unit. A protocol data unit is generated. A dummy padding sub-header is inserted within a header of the protocol data unit.

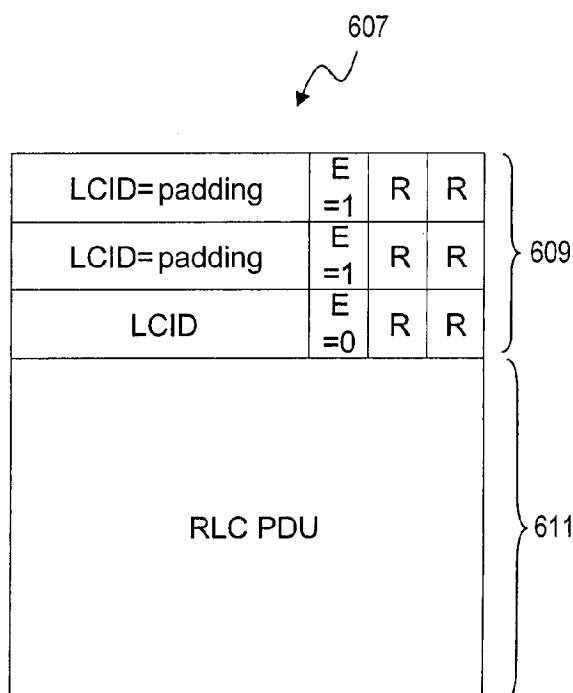


FIG. 6B



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report*