



(51) International Patent Classification:
B65D 51/18 (2006.01)

(21) International Application Number:
PCT/EP2011/061935

(22) International Filing Date:
13 July 2011 (13.07.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10169473.5 14 July 2010 (14.07.2010) EP

(71) Applicant (for all designated States except US):
CROWN PACKAGING TECHNOLOGY, INC.
[US/US]; 11535 S Central Avenue, Alsip, Illinois
60803-2599 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RAMSEY, Christo-
pher, Paul** [GB/GB]; Braeside, Manor Road, Wantage
Oxfordshire OX12 8DP (GB). **KOOPMANS, Lenneke**
[NL/NL]; De Foes 13, NL-5581 AP Waalre (NL).

(74) Agents: **SMITH, Debra** et al.; Downsvie Road, Wan-
tage Oxfordshire OX12 9BP (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CAN COVER - DISC WITH SLOTS

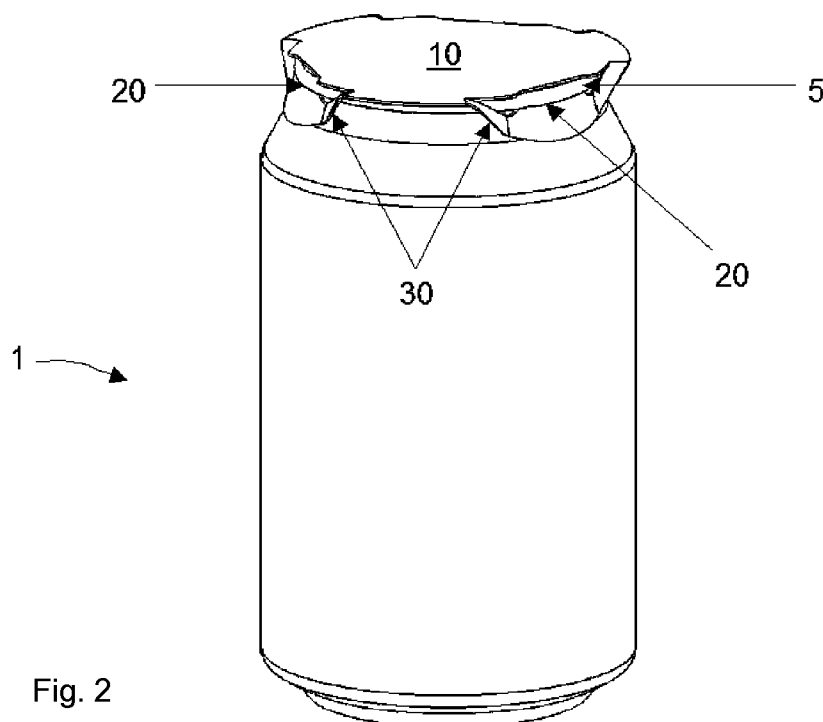


Fig. 2

(57) Abstract: A cover 10 for a container 1, the container 1 having a hollow body and a separate end joined together by a seam 5 and the cover 10 comprising a disc of resilient material having plurality of slots 15 cut therein. Each slot 15 is arranged to define a clip 20 interspaced between two arms 30.



Published:

— *with international search report (Art. 21(3))*