



- (51) **International Patent Classification:**
E05B 13/00 (2006.01) *E05C 19/18* (2006.01)
- (21) **International Application Number:**
PCT/GB2013/000515
- (22) **International Filing Date:**
27 November 2013 (27.11.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1221286.6 27 November 2012 (27.11.2012) GB
- (72) **Inventor; and**
- (71) **Applicant : HARRISON, Wayne** [GB/GB]; Easi-chock,
107 Marsden Road, Sale, Cheshire, M33 3HS (GB).
- (74) **Agent: COOMBES, Catherine;** Harrison IP Limited, 1st
Floor, Box Tree House, Northminster Business Park,
Northfield Lane York YO26 6QU (GB).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) **Title:** CLOSURE SECURING DEVICE

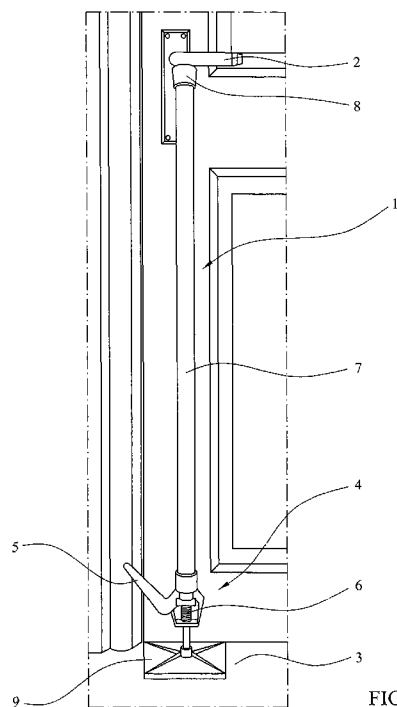


FIG. 1

(57) **Abstract:** The present invention relates to a device for preventing the opening of a latch on a closure (such as a door), the device including a rod-like bracing member having, at one end, means for engaging the lever of latch mechanism of the closure and, at the other end, means for engaging a surface located in the vicinity of the closure, such that in operation the bracing member braces the lever of the latch mechanism in a closed position, as well as kits comprising the device and methods of using the device to secure a closure.