



(51) International Patent Classification:

G01N 27/04 (2006.01) G01R 31/28 (2006.01)
G01R 31/26 (2006.01) H01L 23/544 (2006.01)
H01L 21/66 (2006.01)

(21) International Application Number:

PCT/DK2011/000156

(22) International Filing Date:

21 December 2011 (21.12.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10196137.3 21 December 2010 (21.12.2010) EP
11157330.9 8 March 2011 (08.03.2011) EP

(71) Applicant (for all designated States except US): CAPRES
A/S [DK/DK]; Diplomvej 373, DK-2800 Lyngby (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WEI, Fei [DK/DK];
Kildebakken 6, st.tv., DK-2860 Søborg (DK).
PETERSEN, Dirch Hjorth [DK/DK]; Vangedevej 162B,
2th, DK-2870 Dyssegård (DK). HANSEN, Ole [DK/DK];
Sjælsmarksvej 20, DK-2970 Hørsholm (DK).

(74) Agent: NIELSEN, Henrik Sten; Budde Schou A/S,
Vester Søgade 10, DK-1601 Copenhagen V (DK).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SINGLE-POSITION HALL EFFECT MEASUREMENTS

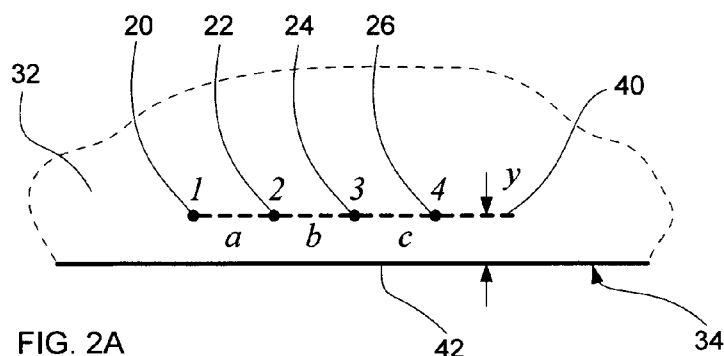

(57) Abstract: A method for determining a distance (Y) between a first position on and an electrical boundary (34) of a test sample by a multi -point probe comprising four contact elements, comprising: contacting the test sample with the four contact elements (20,22,24,26) at the first position, applying a magnetic field at the first position, performing a first and a second four-point measurement and deriving a first and a second resistance value, calculating a first resistance difference from the first and second resistance values, performing a third and a fourth four-point measurement and deriving a third and a fourth resistance value, calculating a second resistance difference from the third and fourth resistance values, defining a first relation including parameters representing the first resistance difference, the second resistance difference, and the distance between the first position and the electrical boundary, determining the distance by using the first and the second resistance differences in the first relation.