



- (51) **International Patent Classification:**
B60P 7/08 (2006.01) *B65D 90/00* (2006.01)
- (21) **International Application Number:**
PCT/EP2014/056102
- (22) **International Filing Date:**
26 March 2014 (26.03.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1040133 28 March 2013 (28.03.2013) NL
- (71) **Applicant:** CORDSTRAP B.V. [NL/NL]; Nobelstraat 1, NL-5807 GA Oostrum (NL).
- (72) **Inventors:** PARRIN, David John; Schubertlaan 11, NL-5707 RK Helmond (NL). WILLEMSE, Remco Cornelis; Schanshof 17, NL-6004DA Weert (NL). LOUDON II, Scott D.; 2160 State St. N.E., N. Canton, Ohio 44721 (US).
- (74) **Agent:** BRANTSANDPATENTS BVBA; Pauline Van Pottelsberghelaan 24, B-9051 Ghent (BE).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) **Title:** METHOD AND SYSTEM FOR SECURING HEAVY LOADS

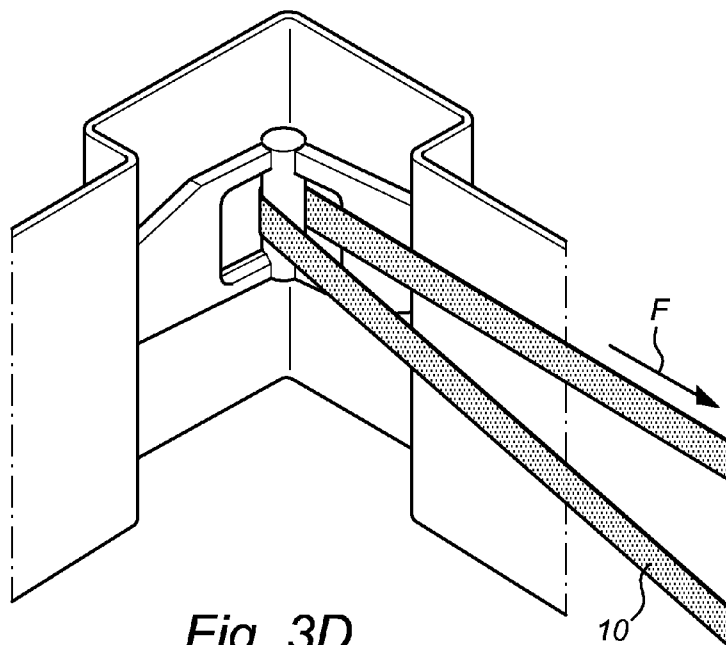


Fig. 3D

(57) **Abstract:** The current invention concerns a method and device for securing cargo load in a container. In an embodiment of the current invention, such method comprises: • - providing a wall securement device (1) comprising two or more apertures allowing the passage of securing means such as straps, which wall securement device is attached to an inner rigid structure of the wall; and • - lashing the cargo load with securing means by use of the wall securement device, whereby the wall securement device is located at the corner post of said container. In a second aspect, the current invention provides for a wall securement device for securing loads.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))