



(43) International Publication Date
20 November 2014 (20.11.2014)

- (51) International Patent Classification:
B05B 7/02 (2006.01)
- (21) International Application Number:
PCT/US2014/011581
- (22) International Filing Date:
15 January 2014 (15.01.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/822,649 13 May 2013 (13.05.2013) US
- (71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; 1 Financial Plaza, Hartford, CT 06101 (US).
- (72) Inventors: NARDI, Aaron, T.; 17 Concord Drive, East Granby, CT 06026 (US). KLECKA, Michael, A.; 75 Hockanum Blvd., Unit 3827, Vernon, CT 06066 (US). CHAMPAGNE, Victor, K.; 48 Noble Street, Pierpont Estates, Dudley, MA 01571 (US).
- (74) Agents: JONES, Joshua, L. et al.; Edwards Wildman Palmer LLP, P.O. Box 55874, Boston, MA 02205 (US).


(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: COLD SPRAY NOZZLE ASSEMBLY

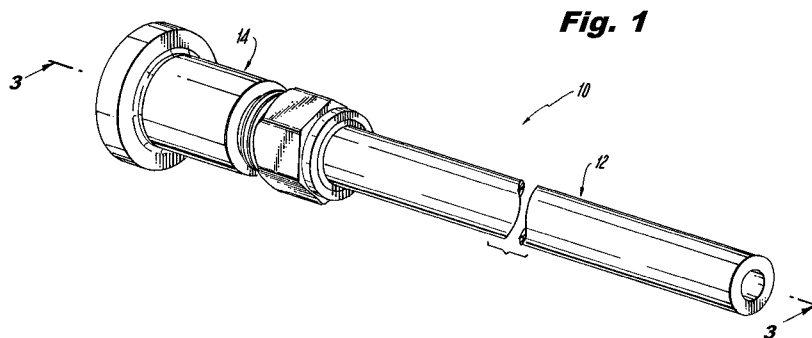

(57) Abstract: A cold spray nozzle assembly is disclosed that includes a nozzle body formed from a first material and an adapter body formed from a second material wherein each body has a passage the communicates with one another along an axis. The nozzle body is formed from a polymeric material and the adapter body formed from a metallic material.



WO 2014/185993 A1