



(51) International Patent Classification:

C10G 45/02 (2006.01) B01J 29/00 (2006.01)
C10G 45/64 (2006.01) B01J 35/10 (2006.01)
C10G 65/02 (2006.01) C10L 10/16 (2006.01)
C10L 1/08 (2006.01) C10L 10/14 (2006.01)

(21) International Application Number:

PCT/US2009/006729

(22) International Filing Date:

29 December 2009 (29.12.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/204,056 31 December 2008 (31.12.2008) US
12/653,478 15 December 2009 (15.12.2009) US

(71) Applicant (for all designated States except US):
EXXONMOBIL RESEARCH AND ENGINEERING COMPANY [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **OLIVERI, Christopher, G.** [US/US]; 16 Royce Brook Court, Annandale, NJ 08801 (US). **HILBERT, Timothy, L.** [US/US]; 12811 Dogwood Hills Lane, Fairfax, VA 22033 (US). **NOVAK,**

William, J. [US/US]; 230 Old Farm Road, Bedminster, NJ 07921 (US).

(74) Agents: **WEISBERG, David, M.** et al.; Exxonmobil Research And Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SOUR SERVICE HYDROPROCESSING FOR DIESEL FUEL PRODUCTION

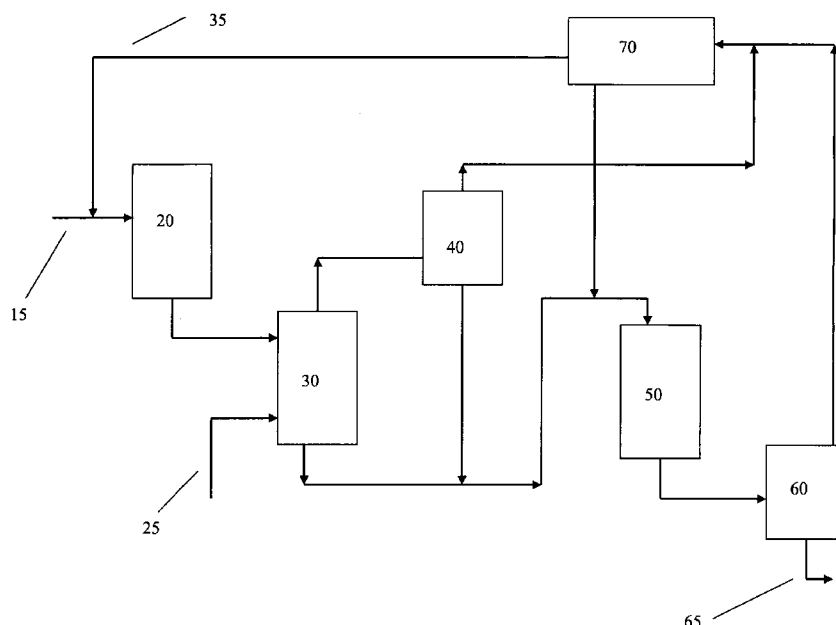


FIGURE 6

(57) Abstract: An integrated process for producing diesel fuel from feedstocks, including diesel fuel production under sour conditions, is provided. The ability to process feedstocks under higher sulfur and/or nitrogen conditions allows for reduced cost processing and increases the flexibility in selecting a suitable feedstock. In addition to the benefits in sour service, the process also returns to clean service activity levels more quickly.



Published:

— *with international search report (Art. 21(3))*