



(51) International Patent Classification:
F16B 31/02 (2006.01)

(21) International Application Number:
PCT/EP2009/052607

(22) International Filing Date:
5 March 2009 (05.03.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08102445.7 10 March 2008 (10.03.2008) EP

(71) Applicant (for all designated States except US): **Rock-
wool International A/S** [DK/DK]; Hovedgaden 584,
DK-2640 Hedehusene (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STRÜWING,
Christian** [DK/DK]; Husumgade 2, 2.th., DK-2200
Copenhagen K (DK). **NIELSEN, Steffen** [DK/DK];
Storm Petersensvej 4, Lejl. 201, DK-2000 Frederiksberg
(DK).

(74) Agent: **ELMEROS, Claus**; Høiberg A/s, St. Kongens-
gade 59a, DK-1264 Copenhagen K (DK).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,
EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A DEVICE FOR INDICATING THE TENSIONING OF A FASTENING MEMBER, SUCH AS A SCREW OR THE
LIKE

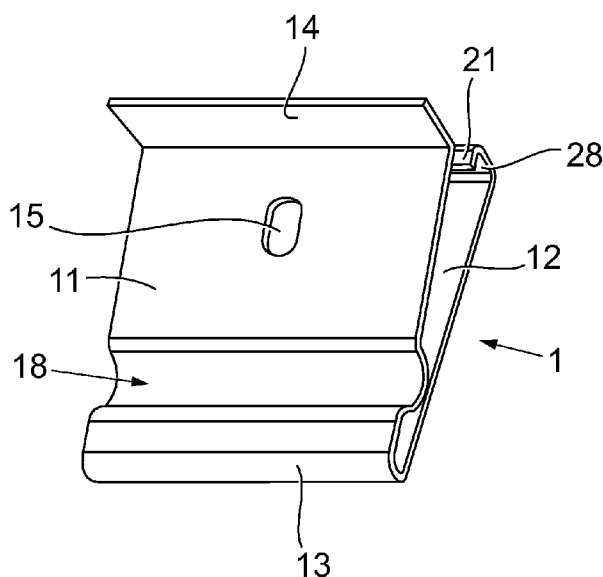


Fig. 1

(57) Abstract: The invention concerns a device for indi-
cating the tensioning of a fastening member, such as a
screw or the like, said device comprising a first portion
(11) with a first fastening member receiving aperture
(15); a second portion (12) with a second fastening
member receiving aperture in alignment with said first
fastening member receiving aperture, and a joining por-
tion (13) connecting said first and second sheet portions
allowing the first and second portions are biased towards
each other by the head of the fastening member in re-
sponse to the tightening of said fastening member,
wherein the device is provided with irreversible indica-
tor (21) means for indicating that the tension in the elon-
gated fastener during the mounting process has been ex-
posed to a tension exceeded a predetermined tension val-
ue, and wherein said irreversible indicator means com-
prises that said first portion is provided with a distal end
portion adapted for sliding and locking engagement with
corresponding indicator means provided on the second
portion, and that said locking engagement indicates the
occurrence of the relative displacement between the first
and second portions have exceeded a predetermined val-
ue.