

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 July 2009 (02.07.2009)

PCT

(10) International Publication Number
WO 2009/080585 A1

(51) International Patent Classification:
B66B 13/22 (2006.01) **B66B 5/00** (2006.01)

(21) International Application Number:
PCT/EP2008/067532

(22) International Filing Date:
15 December 2008 (15.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
07124046.9 21 December 2007 (21.12.2007) EP

(71) Applicant (for all designated States except US): **INVENTIO AG** [CH/CH]; Seestrasse 55, Postfach, CH-6052 Hergiswil (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LINDBERG, Bjarne** [DK/CH]; Chriesibühlhalde 2, CH-6043 Adligenswil (CH).

(74) Common Representative: **INVENTIO AG**; Seestrasse 55, Postfach, CH-6052 Hergiswil (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: CIRCUIT FOR RESETTING AN ELEVATOR SAFETY CHAIN

FIG. 6

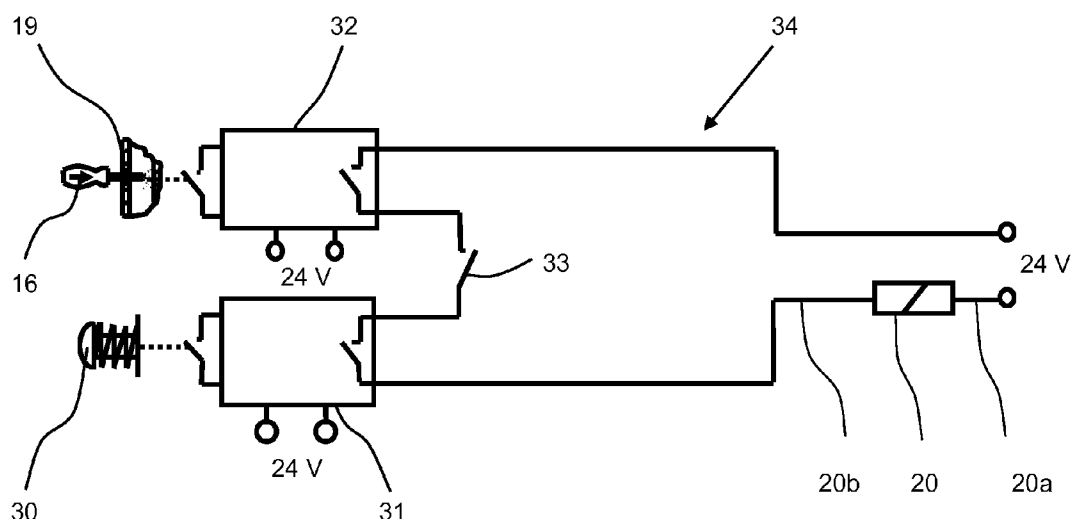

(57) Abstract: A circuit (34) for resetting a component (21) within an elevator safety chain (23). The reset circuit (24) comprises a first reset switch (31), a second reset switch (32) and a door contact (33). This first reset switch is mountable within an elevator shaft (2) and the second reset switch (32) is mountable outside the elevator. Preferably, the second reset switch (32) is hidden from members of the general public but is accessible to an elevator technician. The door contact (33) is mountable alongside the landing door (13). The first reset switch (31), the second reset switch (32) and the door contact (33) are arranged in series so that all must be closed to reset the component (21) whereby, upon activation, the first reset switch (31) remains closed for a first predetermined time period (Δt_1) after which it returns to its open state.

WO 2009/080585 A1